


# HTC-8675 Axle Load Summary [115 ft (35.1 m) Boom]

## Scenario 1: 44,000 lbs per Tandem Group

### Options:

- Cold Weather Starting Aids
- Aluminum Storage Box
- Driver in the Carrier Cab
- Pintle Hook with Air & Electrical Hook-ups
- Air Conditioning in Operator's & Carrier Cab
- Main & Aux. Winch with 630 ft (192.0 m) of Rope
- 4,000 lbs. (1,814.4 kg) Counterweight
- 36.5 to 61 ft (11.3 to 18.6 m) Offsettable Fly
- Auxiliary Lifting Sheave
- Boom Floodlight

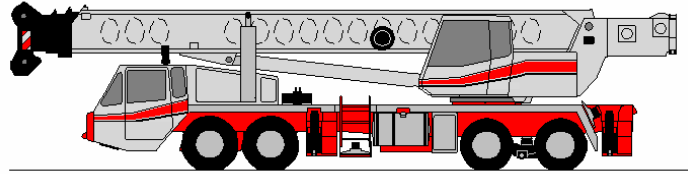


**41,873 lbs.**                      **43,736 lbs.**  
**85,609 lbs.**

- 40 ton (36.3 mt) Hook Block
- 8.5 ton (7.7 mt) Hook Ball

## Scenario 2: 90,000 lbs. Gross Vehicle Weight

### Options:

- Cold Weather Starting Aids
- Aluminum Storage Box
- Driver in the Carrier Cab
- Pintle Hook with Air & Electrical Hook-ups
- Air Conditioning in Operator's & Carrier Cab
- Main & Aux. Winch with 630 ft (192.0 m) of Rope
- 8,000 lbs. (3,628.7 kg) Counterweight
- 36.5 to 61 ft (11.3 to 18.6 m) Offsettable Fly
- Auxiliary Lifting Sheave
- Boom Floodlight

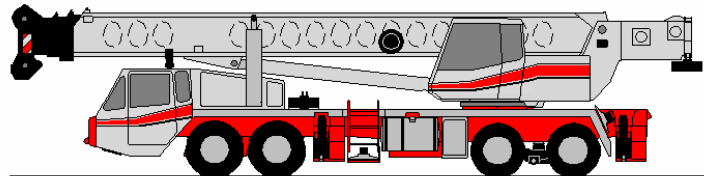


**39,780 lbs.**                      **49,829 lbs.**  
**89,609 lbs.**

- 40 ton (36.3 mt) Hook Block
- 8.5 ton (7.7 mt) Hook Ball

## Scenario 3: Heaviest Machine

### Options:


- Cold Weather Starting Aids
- Aluminum Storage Box
- Driver in the Carrier Cab
- Pintle Hook with Air & Electrical Hook-ups
- Air Conditioning in Operator's & Carrier Cab
- Main & Aux. Winch with 630 ft (192.0 m) of Rope
- 12,000 lbs. (5,443.1 kg) Counterweight
- 36.5 to 61 ft (11.3 to 18.6 m) Offsettable Fly
- Auxiliary Lifting Sheave
- Boom Floodlight

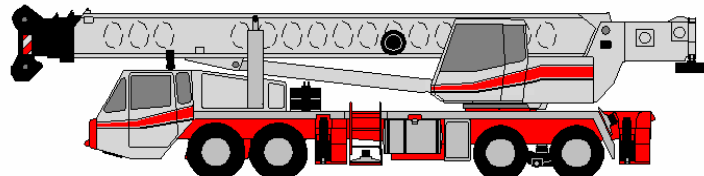

**44,049 lbs.**                      **50,240 lbs.**  
**94,289 lbs.**

- 75 ton (68.0 mt) Hook Block
- 8.5 ton (7.7 mt) Hook Ball

## Scenario 4: Heaviest Machine with Boom Dolly

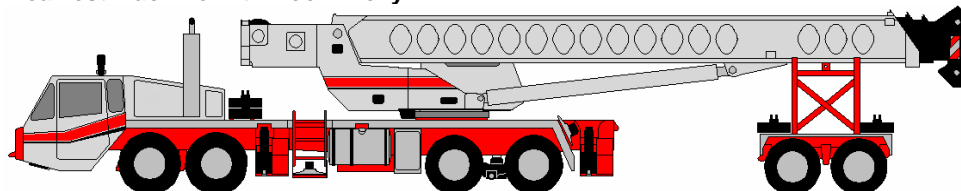

**37,771 lbs.**                      **36,190 lbs.**                      **31,261 lbs.**  
**105,223 lbs.**

### Options:

- Cold Weather Starting Aids
- Aluminum Storage Box
- Driver in the Carrier Cab
- Pintle Hook with Air & Electrical Hook-ups
- Air Conditioning in Operator's & Carrier Cab
- Main & Aux. Winch with 630 ft (192.0 m) of Rope
- 16,000 lbs. (7,257.5 kg) Counterweight
- 36.5 to 61 ft (11.3 to 18.6 m) Offsettable Fly
- Auxiliary Lifting Sheave
- Boom Floodlight
- 75 ton (68.0 mt) Hook Block
- 8.5 ton (7.7 mt) Hook Ball