


Premium Outrigger Pads

Model Specifications

PATENT PENDING



630-725-9373 | info@raptortechinc.com
5411 Walnut Avenue, Downers Grove, IL 60515

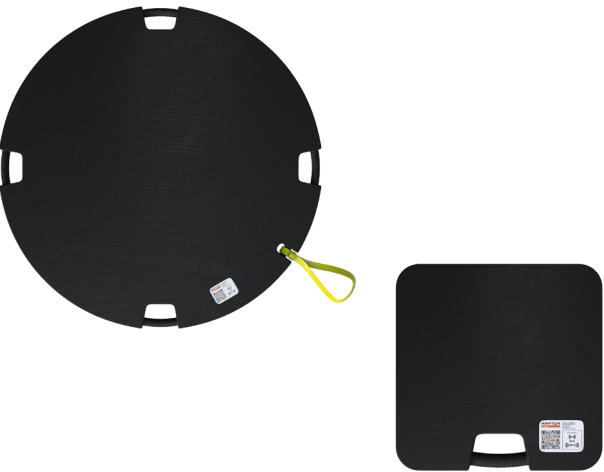

Key Features

- 100% full product transparency
- Embedded RFID and NFC technology
- Engineering data and material certifications
- All pad data accessible via smartphone
- Automatically update and track inventory
- Reduces employee NIOSH lifting index
- Removeable lifting lanyard with capacity rating
- Non-breakable ergonomic through hole handles

Model Number Guide: Shape = Round (R) or Square (S) | Dimensions = Diameter or W x L in inches | Thickness = 2 or 3 inches | Material = UHMW

Model	Dimension (inch)	Approx. Area (sq. ft.)	Weight (lbs.)	Crush Rating (psi)	Working Load Limit (lbs.)
R30-2-UHMW	30 x 2	4.6	45.6	500	100,000
R36-2-UHMW	36 x 2	6.7	66.8	500	100,000
R42-2-UHMW	42 x 2	9.1	91.2	500	115,000
R48-2-UHMW	48 x 2	12.1	120.2	500	130,000
R54-2-UHMW	54 x 2	15.4	153.1	500	145,000
R60-2-UHMW	60 x 2	19.1	189.9	500	160,000
R36-3-UHMW	36 x 3	6.7	99.9	600	130,000
R42-3-UHMW	42 x 3	9.1	136.4	600	150,000
R48-3-UHMW	48 x 3	12.1	179.9	600	170,000
R54-3-UHMW	54 x 3	15.4	229.3	600	190,000
R60-3-UHMW	60 x 3	19.1	284.4	600	210,000
S1818-2-UHMW	18 x 18 x 2	2.1	21.0	500	70,000
S2424-2-UHMW	24 x 24 x 2	3.9	38.2	500	80,000