

## LR7 Series features:

- Altec ISO-Grip<sup>®</sup> Control System
- Working height to 75 ft (22.8 m)
- Working side reach to 48.4 ft (14.8 m)
- 10 ft (3 m) elevator stores compactly
- Mounts on below-FET chassis
- Excellent payload capacity with full size chip box
- Maintenance-free elbow
- 400 lbs platform capacity
- 125 degrees lower boom articulation
- Improved hydraulics for lower oil temperatures
- Improved boom tip and platform covers
- A cupholder



*Maintenance free elbow*



*400 lbs platform capacity on all models*



## New Equipment Sales

210 Inverness Center Drive • Birmingham, AL 35242  
800.958.2555 Fax 205.449.4774

For more information email us at [sales@altec.com](mailto:sales@altec.com)



# Altec LR7 Series

## standard features

- Mounts on below-FET chassis
- Lighter elevator provides more payload capacity
- No required major scheduled maintenance
- Lifetime platform leveling system
- Insulating, ANSI category C
- Round upper boom reduces potential boom damage
- Lifetime structural warranty
- Outrigger boom interlock system
- Outrigger motion alarm
- Backup alarm
- Altec ISO-Grip® Control System
- Insulating lower boom insert

## elevator standard features


- Compact 10 ft (3 m) compensated vertical elevator
- 75 ft (22.8 m) working height

## options

- Dual hydraulic tool circuits
- Under-CDL rear mount package
- Insulating, ANSI category B
- Automatic lower and upper boom stow systems
- Available in 52 ft (15.6 m)

## recommended features

- Fall protection system
- Outrigger pads
- Platform liner
- Wheel chocks

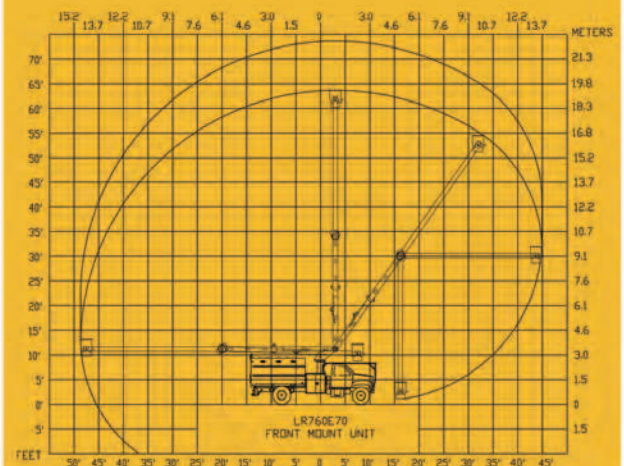

## configurations

Specifications	LR756 FM	LR756 RM	LR758 FM	LR758 RM	LR760 FM	LR760 RM	LR760E70 (FM & RM)
Ground to Bottom of Platform*	56.3 ft (18.7 m)	55.7 ft (17.0 m)	58.3 ft (19.3 m)	57.7 ft (17.6 m)	60.3 ft (19.9 m)	59.7 ft (18.2 m)	70.3 ft (21.4 m)
Working Height*	61.3 ft (23 m)	60.7 ft (18.5 m)	63.3 ft (23 m)	62.7 ft (19.1 m)	65.3 ft (23 m)	64.7 ft (19.7 m)	75.3 ft (23 m)
Maximum Reach from Centerline of Rotation Upper Boom Overcenter (LB at 0 deg)	44.4 ft (13.5 m)	44.4 ft (13.5 m)	46.4 ft (14.2 m)	46.4 ft (14.2 m)	48.4 ft (14.8 m)	48.4 ft (14.8 m)	48.4 ft (14.8 m)
Maximum Reach Upper Boom Non-Overcenter (LB at 125 deg)	41.6 ft (12.7 m)	41.6 ft (12.7 m)	43.6 ft (13.3 m)	42.8 ft (13 m)	44.8 ft (13.6 m)	44.8 ft (13.6 m)	44.8 ft (13.6 m)
Stowed Travel Height, Approximate*	12.4 ft (3.8 m)	11.7 ft (3.6 m)	12.4 ft (3.8 m)	11.7 ft (3.6 m)	12.4 ft (3.8 m)	11.7 ft (3.6 m)	12.4 ft (3.8 m)
Upper Boom Isolation Gap	15.7 ft (4.8 m)	15.7 ft (4.8 m)	17.7 ft (5.4 m)	15.7 ft (4.8 m)	17.7 ft (5.4 m)	17.7 ft (5.4 m)	17.7 ft (5.4 m)
Lower Boom Isolation Gap	15 in (381mm)	15 in (381mm)	15 in (381mm)	15 in (381mm)	15 in (381mm)	15 in (381mm)	15 in (381mm)
Platform Capacity	400 lb (181 kg)	400 lb (181 kg)	400 lb (181 kg)	400 lb (181 kg)	400 lb (181 kg)	400 lb (181 kg)	400 lb (181 kg)
Platform Dimensions	24 x 24 x 39 in (610 x 610 x 991 mm)	24 x 24 x 39 in (610 x 610 x 991 mm)	24 x 24 x 39 in (610 x 610 x 991 mm)	24 x 24 x 39 in (610 x 610 x 991 mm)	24 x 24 x 39 in (610 x 610 x 991 mm)	24 x 24 x 39 in (610 x 610 x 991 mm)	24 x 24 x 39 in (610 x 610 x 991 mm)
Upper Boom Articulation	-2° to 268°	-2° to 268°	-2° to 268°	-2° to 268°	-2° to 268°	-2° to 268°	-2° to 268°
Lower Boom Articulation	0° to 125°	0° to 125°	0° to 125°	0° to 125°	0° to 125°	0° to 125°	0° to 125°
Rotation	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous

\* Based on 40 in (1016 mm) chassis frame height.

Altec reserves the right to improve products and the right to change, amend or delete specifications at any time, without notice or obligation.



210 Inverness Center Drive • Birmingham, AL 35242 • Fax 205.449.4774 • sales@altec.com

New Equipment Sales • 1.800.958.2555

Copyright © 2012 Altec Industries. All Rights Reserved. "Altec" is a registered trademark of Altec Industries, Inc.

ALT-5000400  
3/2013

Courtesy of CraneMarket