

T300

Compact Track Loader



One Tough Animal

Courtesy of MachineMarket



T300 Compact Track Loader

with Vertical Lift Path

Impressive pushing power and tractive effort are provided by a 81 hp, 4-cylinder, turbo-charged, diesel engine and 17.7-inch wide tracks. A 21.2 GPM pump and 3300 PSI relief give the T300 excellent hydraulic breakout and lifting capabilities as well as power for running attachments, including the Brushcat® rotary cutter, dozer blade, landscape rake, stump grinder, tiller and others.

That's a lot of muscle in such a compact machine — only 81 inches high, 80 inches wide and 142.9 inches long!

The loader's unique track system produces a smooth ride as well as the added traction you need for tough digging applications. The tracks also provide low 4.1 PSI ground pressure, making the T300 ideal for working in soft ground conditions.

Other performance features include the T300's transverse-mounted engine for single-side servicing, dual path cooling, sealed and lubricated roller bearings, unsurpassed operator comfort and security and cushioned tilt cylinder.

Tough Tracks fo

New Bobcat T300 Compact Track Loader with Vertical Lift Path delivers superior traction and loads of lift!

Experience the incredible power and smooth ride of the T300 compact track loader. It's definitely the right loader for the toughest applications.

The T300's dedicated rubber track system keeps you working in soft, muddy ground conditions, easily handling the toughest jobs.

A wide choice of Bobcat attachments adds to the productivity and versatility of this operator-friendly, cost-effective machine. Like all Bobcat loaders, the T300 is designed for unsurpassed toughness, dependability and serviceability.



3,000 lb.

Rated
Operating
Capacity

126.4 in.

Lift
Height

34 in.

Reach

6.6 mph

Travel
Speed

or Tough Tasks



Vertical Lift Path

The T300's low-profile lift arms give the operator a great view to all four corners of the machine – and the vertical lift path delivers excellent reach and a hefty 3,000 pounds of rated operating capacity.



A wide choice of attachments, such as the stump grinder, add to the productivity and versatility of this operator-friendly, work-saving machine.



ph	81 hp	21.2/37 gpm
	Turbo-Charged Diesel Engine	Auxiliary Flow/High-Flow



T300

Compact Track Loader

Worldwide Support.

With the Bobcat T300, you get more than an exceptional loader.

You also get the support of a worldwide network of Bobcat dealers offering industry-leading attachments, accessories and parts availability.


Their factory-trained service technicians are equipped to handle all your parts and service requirements, including engine and hydrostatic/hydraulic components.

There's an excellent warranty program, too. Get all the details from your Bobcat dealer.



Choice of Attachments

As with any Bobcat loader, you can count on a variety of quick-mounting Bobcat attachments for the T300. The operator can easily replace a bucket with a backhoe, pallet fork, landscape rake, sweeper, tiller, grapple and many more. Hookup is easier with the new optional Power Bob-Tach™ mounting system!

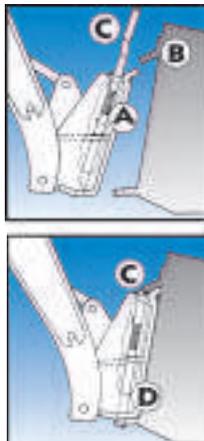

Exclusive Bob-Tach™ System

For fast, secure attachment changes. Bob-Tach frame (A) moves into attachment flange (B) handle (C) pushes down easily, pressing wedge (D) through frame and attachment hole for solid connection. Power Bob-Tach available!

Greater Comfort

- The T300 cab is operator-friendly, designed for maximum comfort and functionality.
- With its larger cab opening, the loader is easy to enter and exit.
- The innovative seat bar pivots from the rear, providing secondary restraint protection and serving as a comfortable armrest for operators of all sizes.
- High-output halogen headlamps double the amount of illumination to the work area for better operation in low light.
- The T300 also features a new, easy-to-read, highly functional instrument panel, along with a number of value-added options.
- Air conditioning is available in the fully climate-controlled cab.

More Options

- Factory- or field-installed deluxe instrument panel includes keyless start, feature lockouts, attachment operation help screens, monitoring and diagnostic functions.
- High-flow auxiliary hydraulics operate attachments such as planers and stump grinders.
- Fully-adjustable suspension seat for all-day operator comfort.
- Cab heater and air conditioning.
- Power Bob-Tach™ mounting system.
- Selectable Joystick Controls.

Added Value

Couple all the work-saving features of the model T300 with proven power and smooth ride, and you have a skid-steer loader that delivers optimum performance on every jobsite!

Bobcat engineering sets the standard for value, comfort and operator-friendly performance!

The Bobcat Standard

Combine all these outstanding features with ease of operation, versatility, maneuverability, wide choice of attachments, worldwide dealer support, service backup, parts availability and high resale, and it all adds up to **total value that can't be matched.**




Track tensioning. Track adjustment is easily accomplished by adding grease to the tensioning cylinder.



Coil spring absorbs varying loads when working in tough applications



Permanently lubricated idlers and rollers. Fully sealed and grease-lubricated for life. No maintenance is required.

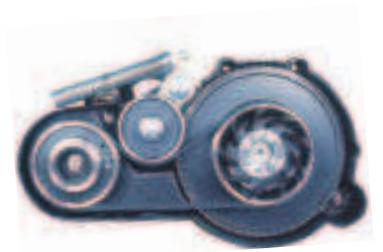

The **Bobcat belt drive advantage** means Bobcat loader engines can be run slower, resulting in a quieter machine that lasts longer and uses less fuel. This system also maximizes pump efficiency and minimizes steering lever effort.



Built-in safety. The Bobcat Interlock Control System (BICS™) requires the operator to be seated in the loader with the seat bar in place and the engine running.



Clean cooling. The exclusive Bobcat dual path cooling system brings clean, cool air from above, through the engine and hydraulic oil coolers, mixes it with engine compartment air, then exhausts it out two side vents.



Bobcat serviceability is unsurpassed. Simply open the swing-out tailgate for full access to the engine's checks and fills, filters and battery. Shop time is spent repairing, not gaining access.

Setting the standard for comfort, safety and visibility. The T300 cab is designed to give you more operator comfort and better all-around visibility.



The optional, fully-adjustable suspension seat allows comfortable all-day operation. The innovative seat bar pivots from the rear, providing secondary restraint protection and serving as a comfortable armrest for operators of all sizes.



Climate-controlled cab. High-visibility front door — with 49% more glass — includes wiper and washer. Along with top, rear and side windows, it will completely seal the cab for efficient heater/vent/AC use.



All-around visibility. Bobcat cab design gives you a super view in all directions.

State-of-the-art instrument panels provide dozens of operational features, diagnostics and monitoring. Optional deluxe instrument panel includes keyless start security system, feature lockouts, digital time and job clocks, multi-language display, even a "help" menu.



LEFT Side Standard Instrument Panel



RIGHT Side Standard Instrument Panel



OPTIONAL Deluxe Instrument Panel

Specifications

Performance

Rated Operating Capacity¹
Operating Capacity
Tipping Load
Hydraulic Pump Capacity
High Flow Option
Ground Pressure (18 in. tracks)
Travel Speed
Operating Weight

T300

3000 lb. (1361 kg) @ 35% of tipping load
4317 lb. (1958 kg) @ 50% of tipping load
8633 lb. (3916 kg)
21.2 GPM (80,25 L/min.)
37 GPM (140,1 L/min.)
4.1 psi
6.6 MPH (10,6 km/hr.)
9354 lb. (4243 kg)

Dimensions

Length (with bucket)
Width (with bucket)
Height
Height to Bucket Pin

142.9 in. (3630 mm)
80.0 in. (2032 mm)
80.9 in. (2055 mm)
126.4 in. (3211 mm)

Engine

Model
Fuel/Cooling
Cylinders
Maximum HP/Displacement
Fuel Tank Capacity

Tier II Compliant

V3300M-DI-T
Diesel/Liquid
4
81/202.53 in.³ (60.4 kW / 3,318 L)
30 gal. (113,6 L)

Operation

Steering and Drive

Hydraulics

Transmission

Direction and speed controlled by two hand levers. Fully-hydrostatic, rubber track drive. Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls. Hydrostatic.

Standard Features

Adjustable Suspension Seat, vinyl
Automatically Activated Air Intake Heater
Auxiliary Hydraulics (Variable Flow/Max. Flow)
Bob-Tach™
Bobcat Interlock Control System (BICS)
Deluxe Operator Cab
Engine/Hydraulic Systems Shutdown
Lift Arm Support Lights, Front and Rear
Parking Brake
Seat Bar
Seat Belt
Spark Arrestor Muffler
Tracks (17.7 in., Rubber)
Turbo-Charger

Options/Accessories

Advanced Control System
Air Conditioning
Alarm Package (Backup Alarm and Horn)
Cab Enclosure
Cab Heater
Catalytic Exhaust Purifier
Deluxe Instrument Panel
Fire Extinguisher Kit
FOPS Kit
Four-Point Lift Kit
Four-Way Flasher Light Kit
High-Flow Auxiliary Hydraulics
Hydraulic Bucket Positioning
Power Bob-Tach™
Rear Auxiliary Hydraulics
Rotating Beacon Light
Seat Bar
Seat Belt, 3 in. wide
Seat Belt, 3-point
Selectable Joystick Controls
Side Windows Kit
Sound Option
Special Applications Kit
Strobe Light Kit
Suspension Seat (cloth cover)
Tailgate Lock Kit
Tracks (12.6 in., Rubber)

Bobcat T300 compact track loader... greater performance, visibility, comfort and value!

Extend your working season with the powerful, versatile T300 compact track loader! Rugged rubber tracks deliver extra traction, greatly reduced ground pressure and low ground disturbance. Superior flotation too, for working on soft, wet, even muddy ground where other machines stop dead! The T300's powerful vertical-path lift arms deliver plenty of lift capacity for handling heavy loads!

Operator Training

Training kits, available through your Bobcat dealer's parts department, let you train current and new operators and service technicians on the latest safety operation and servicing functions on Bobcat loaders. A Spanish language version is also



available. Check the Bobcat website for more information: www.bobcat.com

3000 LB.
Rated Operating Capacity

126.4 IN.
Lift Height

81 HP
Turbo-Charged, Liquid-Cooled Diesel Engine


¹Operating capacity rated with standard digging bucket according to SAE standard J818 and ISO 14397 - RATED OPERATING CAPACITY TO EQUAL NO MORE THAN 35% THE TIPPING LOAD.

²Bucket positioning helps operator keep the same tilt of the load during lifting.

³Includes lexan front door, top and rear windows.

⁴Special application kit (see #3) must be used.

NOTE — Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat skid-steer loaders may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

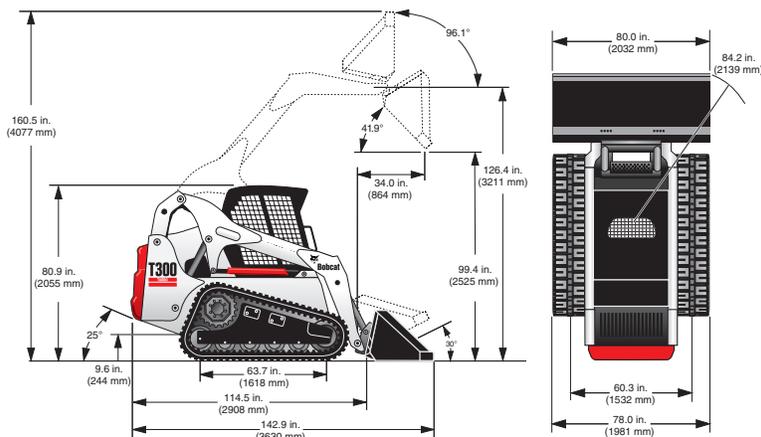

B-1762

Bobcat Company
P.O. Box 6000 • West Fargo, ND 58078
www.bobcat.com

Printed in U.S.A.

An **IR** Ingersoll Rand business

Kn-15 Courtesy of Machine Market

Bobcat Attachments for this model:

- Angle Broom*
- Auger
- Backhoe
- Bale Fork
- Brush Saw
- Buckets
- Chipper*
- Combination Bucket
- Concrete Mixer*
- Concrete Pump*
- Dozer
- Drop Hammer
- Dumping Hopper
- Flail Cutter
- Grapple, Industrial
- Grapple, Root
- Hydraulic Breaker⁴
- Landplane
- Landscape Rake
- Pallet Fork-Heavy-Duty
- Planer*
- Rear Stabilizer
- Scraper
- Seeder
- Snow V-Blade
- Snowblower*
- Sod Layer*
- Soil Conditioner*
- Spreader
- Stump Grinder*
- Tiller
- Tree Spade
- Trench Compactor
- Trencher
- Vibratory Roller
- Water Kit
- Wheel Saw

*Attachment Control Kit required.