


330C MH Material Handler

Dimensions

All dimensions are approximate.

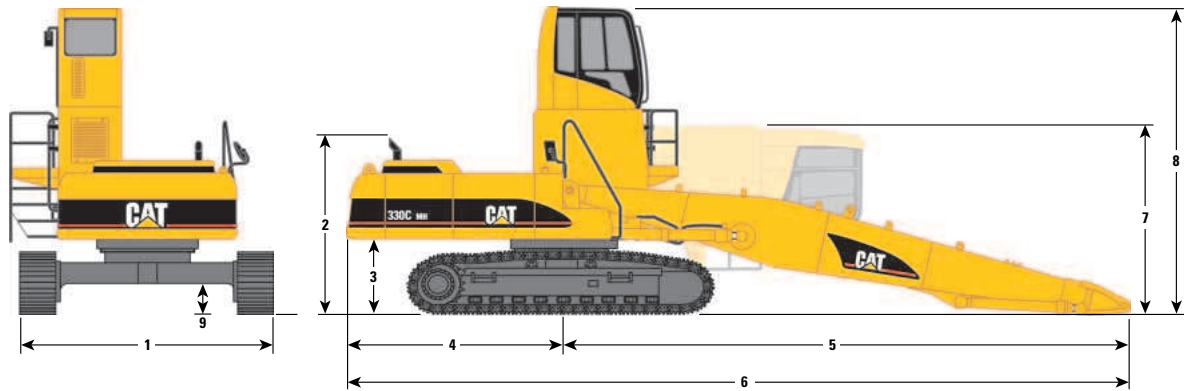

15.9 m (52'2") front

1 Operating Width	4375 mm (14'4")
2 Height to Top of Exhaust	2887 mm (9'6")
3 Counterweight Clearance	1225 mm (4'0")
4 Tail Swing Radius	3500 mm (11'6")
5 Swing Center to End of Boom	9257 mm (30'4")
6 Rear of Carrier to End of Boom	12 744 mm (41'10")
7 Shipping Height – cab tipped	3180 mm (10'5")
8 Operating Height – to top of cab	5078 mm (16'8")
9 Ground Clearance	505 mm (1'8")

Lift Capacities

330C MH

BOOM – 9.2 m (30'2")

MAX REACH – 15.9 m (52'2")

STICK – 7.6 m (25'0")

MAX HEIGHT – 16.4 m (53'10")

Lift Point Height	3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft		13.5 m/45.0 ft		15.0 m/50.0 ft		Maximum Reach				
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m	ft	
15.0 m 50.0 ft	kg								*13,600	*13,600	*4900	*4900									*4800	*4800	9.10
	lb																				*10,900	*10,900	28.64
13.5 m 45.0 ft	kg									*6600	*6600	*5000	*5000								*4400	*4400	10.94
	lb									*13,800	*13,800	*9900	*9900								*9700	*9700	35.13
12.0 m 40.0 ft	kg									*7500	*7500	*6400	*6400	*4700	*4700						*4100	*4100	12.34
	lb									*16,100	*16,100	*13,400	*13,400								*9100	*9100	39.96
10.5 m 35.0 ft	kg									*8300	*8300	*7400	*7400	*6000	*6000						*4000	*4000	13.42
	lb									*18,000	*18,000	*15,800	*15,800	*12,500	*12,500						*8700	*8700	43.89
9.0 m 30.0 ft	kg									*8500	*8500	*7700	*7700	6800	6300	*5200	5100				*3900	*3900	14.27
	lb									*19,000	*19,000	*16,800	*16,800	14,600	13,500	*10,500	*10,500				*8600	*8600	46.58
7.5 m 25.0 ft	kg									*8700	*8700	*7900	7800	6700	6200	5500	5000				*3900	*3900	14.91
	lb									*19,000	*19,000	*17,100	16,700	14,400	13,300	11,700	10,700				*8500	*8500	48.78
6.0 m 20.0 ft	kg							*10 400	*10 400	*9100	*9100	*8100	7500	6600	6000	5400	4900	4500	4100		*3900	*3900	15.39
	lb							*22,600	*22,600	*19,700	*19,700	*17,500	16,200	14,100	13,000	11,500	10,600	*9200	*8700		*8600	*8600	50.39
4.5 m 15.0 ft	kg					*13 400	*13 400	*11 100	*11 100	*9500	9300	7900	7300	6400	5800	5300	4800	4400	4000		*4000	*3700	15.70
	lb					*29,000	*29,000	*24,100	*24,100	*20,600	20,000	17,000	15,600	13,700	12,600	11,300	10,300	9400	8600		*8700	*8100	51.47
3.0 m 10.0 ft	kg			*19 600	*19 600	*14 700	*14 700	*11 800	11 600	9600	8800	7600	7000	6200	5600	5100	4700	4300	3900		3900	3600	15.86
	lb			*42,300	*42,300	*31,800	*31,800	*25,600	25,100	20,700	19,000	16,300	15,000	13,300	12,100	11,000	10,000	9200	8400		8600	7800	52.04
1.5 m 5.0 ft	kg			*14 800	*14 800	*15 600	15 500	12 000	10 900	9100	8400	7300	6700	6000	5400	5000	4500	4200	3800		3900	3500	15.89
	lb			*35,900	*35,900	*33,800	32,800	25,800	23,500	19,700	18,000	15,700	14,300	12,800	11,700	10,700	9700	9100	8200		8500	7700	52.12
0.0 m 0.0 ft	kg	*3100	*3100	*7500	*7500	*15 800	14 200	11 300	10 300	8700	7900	7000	6400	5800	5300	4900	4400	4100	3800		3800	3500	15.71
	lb	*7100	*7100	*17,100	*17,100	33,900	30,600	24,400	22,200	18,800	17,100	15,100	13,700	12,400	11,300	10,400	9500	8900	8100		8500	7700	51.71
-1.5 m -5.0 ft	kg	*3700	*3700	*6400	*6400	*12 800	12 800	10 900	9800	8400	7600	6800	6200	5600	5100	4800	4300	4100	3700		3900	3500	15.50
	lb	*8200	*8200	*14,600	*14,600	*29,600	29,200	23,400	21,200	18,100	16,400	14,600	13,300	12,100	11,000	10,200	9300	8800	8000		8600	7800	50.61
-3.0 m -10.0 ft	kg	*4400	*4400	*6500	*6500	*10 900	10 900	10 600	9600	8200	7400	6600	6000	5500	5000	4700	4200	4100	3700		4000	3700	15.10
	lb	*9800	*9800	*14,600	*14,600	*25,000	25,000	22,800	20,600	17,700	16,000	14,300	12,900	11,900	10,800	10,100	9100				8900	8100	49.39
-4.5 m -15.0 ft	kg			*6900	*6900	*10 600	10 600	10 100	9400	8100	7300	6500	5900	5500	4900	4600	4200				*3700	*3700	14.48
	lb			*15,500	*15,500	*24,000	24,000	*21,700	20,300	17,400	15,700	14,100	12,800	11,800	10,700	*9600	9100				*8000	*8000	47.39
-6.0 m -20.0 ft	kg					*9600	*9600	*8300	*8300	*7000	*7000	*5800	*5800	*4600	*4600								
	lb					*20,600	*20,600	*17,700	*17,700	*14,900	*14,900	*12,300	*12,300	*9600	*9600								

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

330C MH Material Handler

Working Ranges — Two-Piece Front Linkage

Machine equipped with 15.9 m (52'2") two-piece front linkage.

Maximum reach	15.9 m	52'2"
Maximum height	16.4 m	53'10"

