


SPECIFICATIONS

CHARACTERISTICS	1	Manufacturer			
	2	Model			
	3	Capacity	at rated load center	kg	
	4	Load center	distance	mm	
	5	Power type	Electric, Diesel, Gasoline, Lp - gas		
	6	Operator type	Stand - on, Driver - seated		
	7	Tire type	C = cushion, P = pneumatic		
	8	Wheels (x = driven)	number, front / rear		
DIMENSIONS	9	Lift with STD	max. fork height with rated load	mm	
	10	two - stage mast	free lift	mm	
	13	Forks	thickness x width x length	mm	
			fork spacing (minimum x maximum)	mm	
	14	Tilt of mast	forward / backward	deg	
	15		length to fork face	mm	
	16		width	mm	
	17	Overall Dimensions	mast lowered height	mm	
			mast extended height	mm	
			overhead guard height	mm	
			seat height	mm	
	21	Turning radius (minimum outside)		mm	
	22	LMC (center of front axle to fork face)		mm	
	23	Aisle 90° stacking (add load length)		mm	
23a	Aisle 90° intersect		mm		
PERFORMANCE	24	Speeds	travel : loaded / unloaded	km/h	
			lift : loaded / unloaded	mm/s	
			lowering : loaded / unloaded	mm/s	
	28	Drawbar pull	at 1.6 km/h, loaded	kg	
30	Gradeability	at 1.6 km/h, loaded	%		
WEIGHT	32	Total weight	unloaded	kg	
	33	Axle load	with load : front / rear	kg	
			without load : front / rear	kg	
CHASSIS	35		number of front / rear		
	36	Tires	size, front		
			size, rear		
	38	Wheelbase		mm	
	39	Tread width	front	mm	
			rear	mm	
	40	Ground clearance	loaded	at center of truck	mm
				at lowest point	mm
42	Brakes	service			
43		parking			
POWER TRAIN	45	Battery	voltage / ampere - hour	V/AH	
	49		model		
	50	Engine	rated output (at rpm)	ps/rpm	
			(DIN)	kW/hp	
			max. torque	kgm/rpm	
	52		cycle / cylinders / displacement	cc	
	55	Transmission	type		
56	no. speeds, forward / reverse				
57	Relief pressure	System / attachments		Bar	

Daewoo			
	D50S-2	D60S-2	D70S-2
	5000	6000	7000
	600	600	600
	Diesel		
	Driver - seated		
	P		
	4 / 2		
	3000	3000	3000
	205	205	205
	60×150×1200	60×180×1200	60×180×1200
	350×2032	410×2032	410×2032
	15 / 10	15 / 10	15 / 10
	3487	3548	3627
	2156	2156	2156
	2500	2500	2500
	4340	4340	4340
	2400	2400	2400
	1308	1308	1308
	3301	3331	3380
	612	612	612
	3913	3943	3992
	2980	3013	3048
	29.6 / 32.4	29.1 / 32.2	28.5 / 32.0
	500 / 530	490 / 530	445 / 470
	501 / 450	501 / 450	499 / 450
	6098	6063	6054
	52.3	44.5	39
	8123	8873	9600
	11732 / 1391	13253 / 1620	14671 / 1929
	4001 / 4122	3967 / 4906	3815 / 5785
	4 / 2	4 / 2	4 / 2
	8.25×15-14PR		
	8.25×15-14PR		
	2250	2250	2250
	1584	1584	1584
	1550	1550	1550
	205	205	205
	176	176	176
	Foot / Hydraulic		
	Hand / Mechanical		
	24 / 75	24 / 75	24 / 75
	DB58		
	100 / 2200		
	73.6 / 98.6		
	35 / 1600		
	4 / 6 / 5785		
	Power shift		
	3 / 3		
	210 / 140	210 / 140	210 / 140

Dimensional drawings

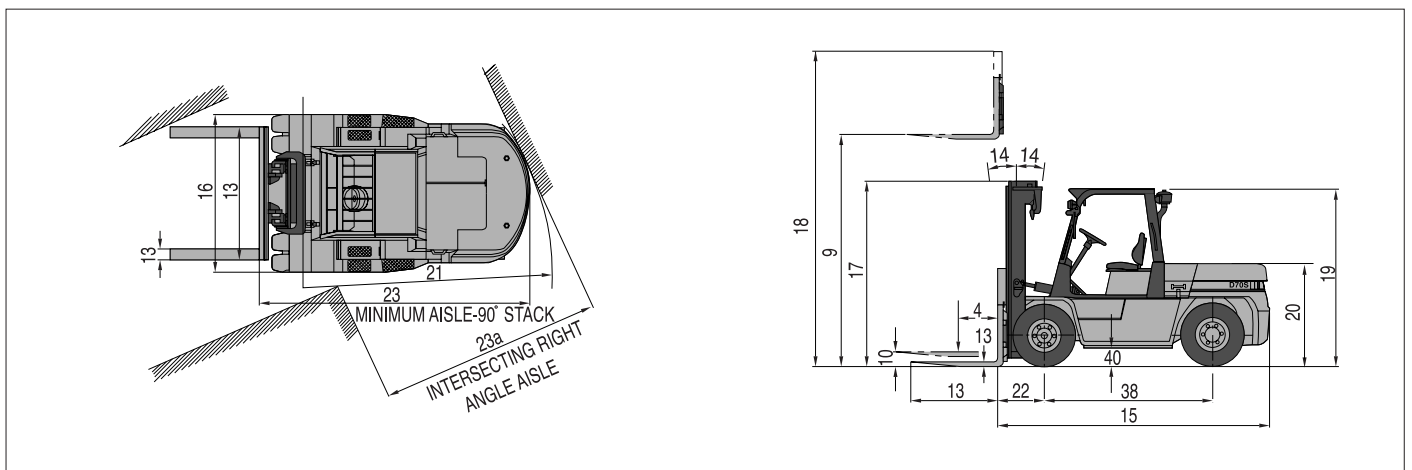


Daewoo		
D50A-2	D60A-2	D70A-2
5000	6000	7000
600	600	600
Diesel		
Driver - seated		
P		
4 / 2		
3000	3000	3000
205	205	205
60 × 150 × 1200	60 × 180 × 1200	60 × 180 × 1200
350 × 2032	410 × 2032	410 × 2032
15 / 10	15 / 10	15 / 10
3487	3548	3627
2156	2156	2156
2500	2500	2500
4340	4340	4340
2400	2400	2400
1308	1308	1308
3301	3331	3380
612	612	612
3913	3943	3992
2980	3013	3048
25 / 26.5	24.5 / 26.5	23.5 / 26.5
376 / 407	372 / 407	337 / 361
490/460	490/460	491/460
4618	4584	4580
37.8	32.6	28.9
8066	8794	9505
11687 / 1379	13160 / 1634	14547 / 1958
3995 / 4071	3927 / 4867	3777 / 5728
4 / 2	4 / 2	4 / 2
8.25 × 15-14PR		
8.25 × 15-14PR		
2250	2250	2250
1584	1584	1584
1550	1550	1550
205	205	205
176	176	176
Foot / Hydraulic		
Hand / Mechanical		
24 / 75	24 / 75	24 / 75
D436		
74 / 2400		
54.4 / 73		
25.9 / 1400		
4 / 4 / 3581		
Power shift		
2 / 2		
170 / 140	190 / 140	190 / 140

Daewoo		
G50S-2	G60S-2	G70S-2
5000	6000	7000
600	600	600
LPG		
Rider - seated		
P		
4 / 2		
3000	3000	3000
205	205	205
60 × 150 × 1200	60 × 180 × 1200	60 × 180 × 1200
350 × 2032	410 × 2032	410 × 2032
15 / 10	15 / 10	15 / 10
3487	3548	3627
2156	2156	2156
2500	2500	2500
4340	4340	4340
2400	2400	2400
1308	1308	1308
3301	3331	3380
612	612	612
3913	3943	3992
2980	3013	3048
24.0 / 25.4	23.8 / 25.4	23.6 / 25.4
380 / 410	380 / 410	380 / 410
490/460	490/460	490/460
5010	4990	4965
41.4	35.7	31.4
8110	8840	9550
11560 / 1550	13030 / 1810	14420 / 2130
3870/ 4240	3800 / 5040	3650 / 5900
4 / 2	4 / 2	4 / 2
8.25 × 15-14PR		
8.25 × 15-14PR		
2250	2250	2250
1584	1584	1584
1550	1550	1550
205	205	205
176	176	176
Foot / Hydraulic		
Hand / Mechanical		
12 / 75	12 / 75	12 / 75
GM V6-4.3		
86.7 / 2400		
63.8 / 85.5		
30.5 / 1400		
4 / 6 / 4294		
Power shift		
2 / 2		
170 / 140	190 / 140	190 / 140

5.0 ~ 7.0 Ton Series

LOAD CAPACITY CHART

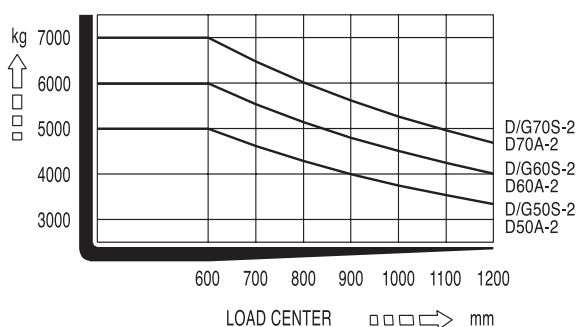

Standard equipment

- Diesel chassis
- Pneumatic tires (Dual drive single steer)
- 3-section valve
- Seat
- 3000mm STD 2-stage mast
- Tilt cylinders(15 fwd / 10 back)
- Carriage
- 1200mm forks

A Standard chassis includes :

- 5.8 liter diesel engine for D50 / 60 / 70S-2
- 3.6 liter diesel engine for D50 / 60 / 70A-2
- 4.3 liter LPG engine for G50 / 60 / 70S-2
- 3-speed powershift transmission for D50 / 60 / 70S-2
- 2-speed powershift transmission for D50 / 60 / 70A-2
- 2-speed powershift transmission for G50 / 60 / 70S-2
- Power steering system
- Electrical fuel shut-off
- Anti-restart ignition key switch
- Parking brake
- Maintenance free battery
- Tilt steering wheel
- 2 front floodlights
- Counterweight
- Overhead guard

MAST SPECIFICATIONS AND RATED CAPACITIES

Truck Model	Mast Type	Max. Fork Height	Overall Height		Free Lift	Load Center	Rated Capacity
			Fully Lowered	Fully Extended			
		mm	mm	mm	mm	mm	kg
D/G50S-2	STD	3000	2495	4275	205	600	5000, 6000, 7000
D/G60S-2	STD	3500	2745	4775	205	600	5000, 6000, 7000
	STD	3700	2845	4975	205	600	5000, 6000, 7000
D/G70S-2	STD	4000	2995	5275	205	600	5000, 6000, 7000
D/50A-2	STD	4500	3345	5775	205	600	5000, 6000, 7000
D60A-2	STD	5000	3595	6275	205	600	5000, 6000, 7000
	STD	5500	3845	6775	205	600	5000, 6000, 7000
D70A-2	STD	6000	4095	7275	205	600	5000, 6000, 7000

Specifications and features in this catalog are subject to change without prior notice

In some cases the photographs in this catalog show optional equipment.

Specification values quoted in this catalog have been rounded.

DAEWOO products and specifications are subject to improvement and change without notice.

Performance may vary due to operating conditions.

The performance shown represents nominal values obtained under typical operating conditions.



Head Office : 7-11, Hwasu-Dong, Dong-Gu, Incheon, Korea. Tel : 82-32-760-1706 Fax : 82-32-760-6173

Seoul Office : 8th floor Daewoo Heavy Industries & Machinery Bldg, 14-34, Youido-Dong, Youngdungpo-Gu, Seoul, 150-010, Korea. Tel : 82-2-2167-3114 Fax : 82-2-3775-1504

Web site : www.daewooforklift.com

DAEWOO

Forklift Truck

**5.0~7.0 Ton Series
Diesel/LPG**

