


55 GSL-3 55 Ton Self-Lifting Detachable Lowboy - ABS Air Brake Axles

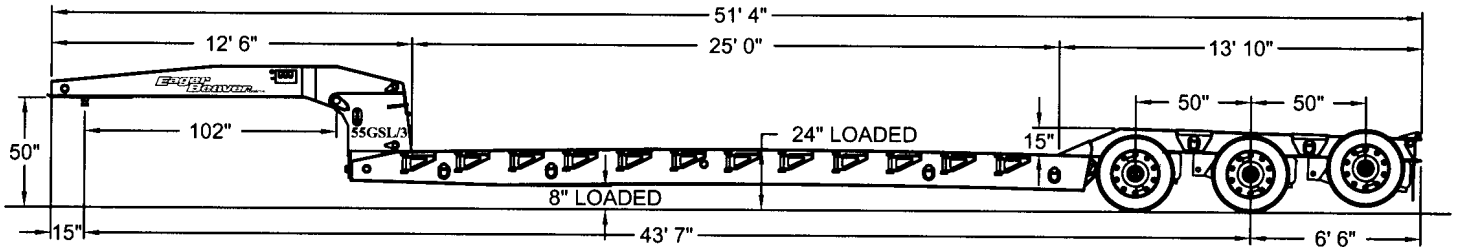

Capacity: 110,000 lbs. Trailer Weight: 21,225 lbs.
Deck Width: 8 ft. 6 in. Length: 25 ft. Height: 24 in. (Loaded)
80,000 lb. Minimum Yield Steel Mainframe
Pierced Crossmembers
Front Flip Ramps, Stressed for 4th Flip

Gooseneck 102" STD.
Cast Steel Outriggers
Patented "ROTO RINGS"® Swivel 360°
100% Sealed Modular Wiring Harness
Boom Well

SPECIFICATIONS

Frame <input type="checkbox"/>	<input type="checkbox"/>	Mainrails: Four fabricated 16" Deep cambered I-Beam, 80,000 P.S.I. steel
Crossmembers <input type="checkbox"/>		10" x 9 lbs. per ft. I-Beam, pierced through mainbeam (24" spacing Std.)
Gooseneck Length <input type="checkbox"/>		Standard 102" (For special lengths contact sales)
Decking <input type="checkbox"/>	<input type="checkbox"/>	Nominal 2" Hardwood
Wiring Harness <input type="checkbox"/>		Sealed L.E.D. Lights & USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Front Ramps <input type="checkbox"/>	<input type="checkbox"/>	Front Flip w/ Grousers (Wood filled is available)
Hydraulics <input type="checkbox"/>	<input type="checkbox"/>	Wetline hook-up for tractor PTO operation •REQUIREMENT: Low Flow/High Pressure System
Hydraulic Cylinders <input type="checkbox"/>	<input type="checkbox"/>	Two Main 7.75", One 3" Locking, One 4" Gooseneck Support
Controls <input type="checkbox"/>	<input type="checkbox"/>	Control Valve eye level
Lift Axle <input type="checkbox"/>	<input type="checkbox"/>	Air Lift 3rd Axle
Tie Down <input type="checkbox"/>	<input type="checkbox"/>	7 per side - Patented "ROTO RINGS"® Swivel 360°
Outriggers <input type="checkbox"/>	<input type="checkbox"/>	Cast Steel (Locks both in and out position)
Colors <input type="checkbox"/>	<input type="checkbox"/>	Yellow (Standard), Red, Black

RUNNING GEAR

Tires <input type="checkbox"/>	<input type="checkbox"/>	Twelve 275/70R22.5 (H) Steel Belted Radial
Hubs/Wheels <input type="checkbox"/>	<input type="checkbox"/>	Six Disc Type Hubs, Twelve 8.25 x 22.5 Disc Type Wheels, Stemco Oil Seals, Hub Piloted
Suspension <input type="checkbox"/>	<input type="checkbox"/>	Air Ride (Combined Capacity 75,000 lbs.) Dump Valve
Axles <input type="checkbox"/>	<input type="checkbox"/>	Three 5" diameter 25,000 lbs. each, H.M. series bearings
Brakes <input type="checkbox"/>	<input type="checkbox"/>	16 1/2" x 7" Air, "S" Cam., Auto Slack Adjusters
ALL WHEEL ABS <input type="checkbox"/>		Anti-lock brake system 4S3M, Sensors on (2) Axles, 3 modulator valves
Parking Brake <input type="checkbox"/>	<input type="checkbox"/>	Spring Brakes on All Wheels

OPTIONS

Additional Deck Length: (26'-27'-28' Optional Lengths)
 Additional Deck Width: (108" w/ 102" axles or 108" axles) - (120" w/ 120" axles)
 Gooseneck Fenders
 Power Pack: 11hp, 12hp Kohler, 13hp Honda, or 16hp Kohler (Combination Power Pack/Wet Kit Available)
 Lockable Tool & Chain Storage: Forward center deck area (1 or 2 compartments)
 Additional "ROTO-RINGS"®
 Spare Tire & Disc Wheel 275/70R22.5 (H) Optional: Spare Tire Carrier
 Wheel Covers (Raised)
 Apitong Decking in lieu of Oak
 Paint (other than standard Yellow) Price on Request



Call (800) 257-8163 for more information