


Grove GMK7550

Product Guide

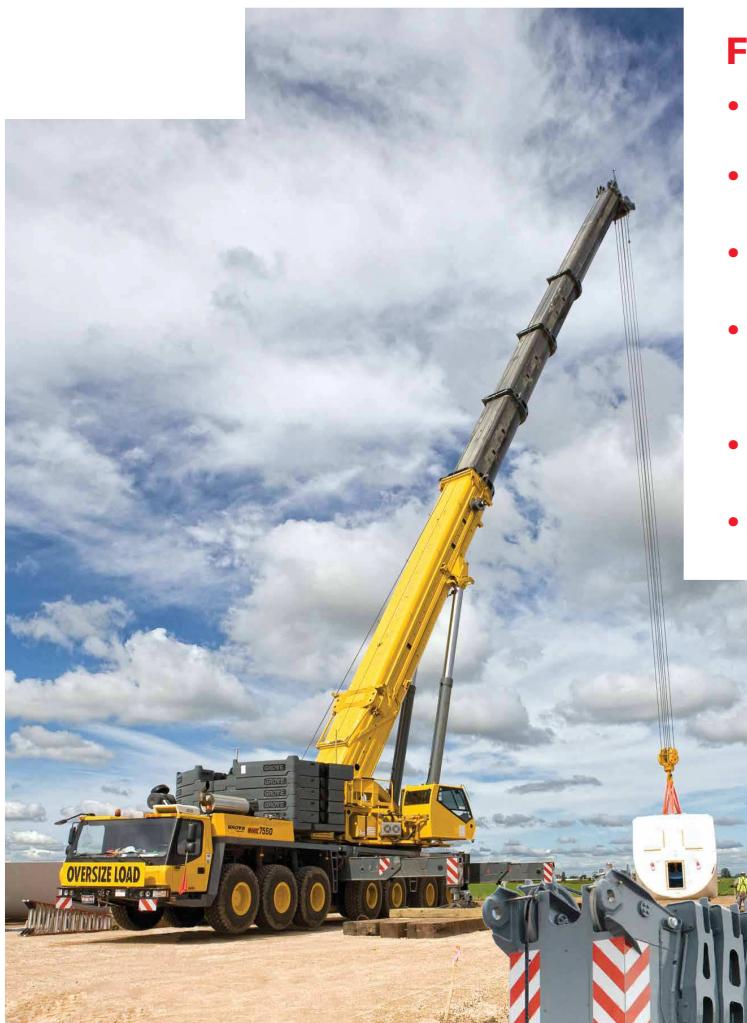

Features

- 450 t (550 USt) capacity
- 60 m (197 ft) five-section boom
- 25 m - 79 m (82 ft - 259 ft) lattice luffing jib
- 120 t (264,500 lb) counterweight with hydraulic installation/removal system
- MegaWingLift™
- Allison 4800 SP transmission



Features

MEGATRAK™

The MEGATRAK™ suspension system is the best off-road driveline available on the market today. The system's versatility and performance allows the GMK7550 to operate as a true all-terrain crane. The MEGATRAK™ independent suspension and all-wheel steer system allows wheels to remain on the ground at all times so stresses and weight are not continually transferred between axles. MEGATRAK™ provides true ground clearance where others just raise the chassis.

Other benefits of the MEGATRAK™ system are:

- A reliable suspension system
- Excellent job site maneuverability with all-wheel steering
- Commonality among almost all models
- A driveline that remains aligned at all times
- A steering linkage system that is protected against damage
- Constant tire contact for equal tire wear
- Reduced maintenance



TWIN-LOCK™

Boom pinning mechanism automatically pins the sections in position using two horizontal pins.



ECOS

Electronic Crane Operating System - ECOS enables control of the entire crane's principle operations. Simple programming eases lift planning and a supply of essential information allows full concentration on the lift itself.



EKS 5

The EKS 5 monitors the lifting conditions of the crane at all times and provides a full graphic display, rear lighting, graphic of boom telescoping percentage, and load charts.



CraneSTAR

CraneSTAR is an exclusive and innovative crane asset management system that helps improve your profitability and reduce costs by remotely monitoring critical crane data. Visit www.cranestar.com for more information.

Contents

Specifications	4
Dimensions	7
Counterweight	12
Travel proposals	13
Working range/load charts main boom	15
Working range/load charts luffing jib	20
Working range/load charts fixed jib	41
Working range/load charts heavy duty jib	49
Symbols glossary	57

Specifications

Superstructure

Boom

16 m - 60 m (53 ft - 197 ft) five-section, full power boom with patented TWIN-LOCK™ boom pinning system. Maximum tip height: 63 m (207 ft).



Boom elevation

Two lift cylinders with safety valves provide boom angles from -1.2° to +82°.



*Lattice jib

Luffing jib is a lattice design with lengths of 25 m - 79 m (82 ft - 259 ft) in sections of 6,2 m (20 ft) and 12,2 m (40 ft). The luffing jib converts to a fixed offset lattice jib providing lengths of 12 m - 70 m (39 ft - 230 ft) offsettable at 3° and 25°.



Load moment and anti-two block system

Graphic display load moment and anti-two block system with audio/visual warning and control lever lockout. These systems provide electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block condition.



Cab

All aluminum construction cab is tiltable (approximately 20°) and includes safety glass and adjustable operator's seat. Other features include engine independent hot water heater including 24 hour timer, air conditioning, armrest integrated crane controls, and ergonomically arranged instrumentation. Cab hydraulically stows to the rear of the superstructure for highway travel.



Swing

Three axial piston fixed displacement motors provide swing speed of 0 - 1.1 RPM thru planetary gear box. Also provided is a spring applied, hydraulically released automatic swing brake with foot operated release for free swing.



Counterweight

120 t (264,500 lb) consisting of various sections with hydraulic installation/removal system (see counterweight configuration on page 12).



Engine

Mercedes OM906LA, diesel, 6 cylinders, water cooled, turbocharged, 205 kW (279 hp) at 1800 rpm. Max. torque: 1100 Nm (811 ft/lb) at 1200 rpm. Engine emission: EUROMOT/EPA/CARB Tier III (non-road).



Fuel tank capacity

300 L (79 gal).



Hydraulic system

Five separate circuits, Three axial piston variable displacement pumps with electronic power limiting control, 1 axial piston variable displacement pump for slewing and 1 fixed displacement pump for auxiliary gears. Standard thermostatically controlled oil coolers keep oil at optimum operating temperature. Tank capacity: 1570 L (415 gal)



Control system

Full electronic control of all crane movements is accomplished using electrical control levers with automatic reset to zero. Controls are integrated with the LMI and engine management system by CAN-BUS.



Electrical system

24 V system with three-phase alternator 28 V/100 A 2 batteries 12 V/170 Ah.

Specifications

Superstructure continued

Hoist

Main and auxiliary hoist are powered by axial piston variable displacement motor with planetary gear and brake. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

	Main	Auxiliary
Line length	460 m (1509 ft)	690 m (2264 ft)
Rope diameter	24 mm	24 mm
Line speed	130 m/min (427 fpm)	130 m/min (427 fpm)
Line pull	110 kN (24,729 lb)	104 kN (23,380 lb)

Hoist cameras and lights included.

*Optional hookblocks

Lifting capacity	Sheaves	Weight	Possible load with the crane*
320 t (353 USt)	11	3500 kg (7716 lb)	231 t / 277 t* (255 USt / 305 USt*)
250 t (275 USt)	9	3000 kg (6614 lb)	231 t (255 USt)
200 t (220 USt)	7	2400 kg (5291 lb)	184 t (203 USt)
160 t (176 USt)	5	1800 kg (3669 lb)	136 t (150 USt)
100 t (110 USt)	3	1300 kg (2866 lb)	88 t (97 USt)
40 t** (44 USt)	1	850 kg (1874 lb)	38 t (42 USt)
16 t*** (18 USt)	H/B	450 kg (992 lb)	12,5 t (13.8 USt)

* Requires additional boom nose sheave

** Required for overhaul of single part line with boom/jib lengths in excess of 99,4 m (326 ft)

*** Overhaul weight designed for a maximum of 99,4 m (326 ft) boom/jib lengths

*Optional equipment

- Second spotlight on superstructure cab
- Stereo/CD player
- Lift enhancement system (MegaWingLift™)
- Additional 40 t (88,200 lb) counterweight for MegaWingLift™
- Worklights on boom base section
- Aircraft warning lights
- Hook blocks
- Adapter for heavy duty jib
- 360° positive swing lock

Carrier



Chassis

Special seven-axle carrier, welded torsion resistant frame is fabricated from high-strength steel.



Outrigger system

Hydraulic two-stage outrigger beams are extended by a single hydraulic cylinder and two cables. Outriggers can adjust to two positions:

Fully extended (100%) - 8,9 m (29.2 ft)
Partially extended (50%) - 6,1 m (20 ft)

Four 810 mm x 810 mm (32 in x 32 in), self stowing, steel outrigger pads provide rigid lifting base. Outrigger controls are located on both sides of the carrier. Electronic level indicators with automatic levelling system. Outrigger pad load indication through ECOS and carrier controls. Includes outrigger monitoring system.



Engine

Mercedes, diesel, 8 cylinders, water-cooled, turbocharged, 420 kW (563 hp) at 1800 rpm.
Max. torque: 2700 Nm (1991 ft lb) at 1300 rpm.
Engine emission: EUROMOT/EPA/CARB Tier III (non-road).



Fuel tank capacity

500 L (132 gal).

Specifications

Carrier continued



Transmission

Allison automatic 4800 SP-R, seven forward and one reverse speed. Transfer case with two speeds and inter-axle differential lock. Hydraulic transmission retarder.



Drive/steer

14x6x14



Axes

Seven axles. 1, 4 and 5 are drive/steer. Axles 2, 3, 6 and 7 are steer only.



Suspension

GMK7550 features the Grove exclusive MEGATRAK™ suspension. This revolutionary design features an independent hydronematic system with hydraulic lockout acting on all wheels. The suspension can be raised 170 mm (6 - 1/2 in) or lowered 130 mm (5 in) both longitudinally and transversely and features an automatic leveling system for on-highway travel.



Tires

14 tires 445/95 R25 (16.00 R25)
(vehicle width: 3,00 m [9.8 ft])



Steering

Dual circuit steering system is hydraulic power assisted with emergency steering pump.
Axles 1, 2, 3, 6 and 7steer on highway.
Separate steering of the 4th, 5th, 6th and 7th axles for all wheel steer and crab-steer, controlled by an electric rocker switch.



Brakes

A dual circuit air system operates on all wheels with a spring-applied, air released parking brake acting on axles 2, 4, 5 and 7. An air dryer is fitted to remove moisture from the air system. Standard engine compression brake and transmission retarder.



Cab

Two-man, aluminum construction driver's cab includes the following features: safety glass; driver seat with pneumatic suspension, engine-dependent hot water heater and air conditioning. Complete instrumentation and driving controls.



Electrical system

24 V system with three-phase alternator 28 V/100 A, 2 batteries 12 V/170 Ah.



Maximum speed

85 km/h (53 mph) with 20.5 R25 tires.



Gradeability (theoretical)

32% with 20.5 R25 tires (14x6x14)
50% with 20.5 R25 tires (14x8x14)




Miscellaneous standard equipment

Boom removal kit; trailing boom kit (less dolly), additional hydraulic oil cooler; removable rear outrigger box; tool kit; fire extinguisher; radio/cd player in carrier cab, CraneSTAR asset management system.

*Optional equipment

- 14 x 8 x 14 (1,2,4 and 5 are drive/steer)
- Engine-independent hot water heater, with engine pre-heater
- 14 tires, 385/95 R25 (14.00 R25).
(vehicle width 3,00 m [9.8 ft])
- 14 tires, 525/80 R25 (20.5 R25).
(vehicle width 3,1 m [10.2 ft])
- Aluminum rims
- Auxiliary axle, pinned when rear outrigger box is removed
- Hinged bunk bed
- Working range limiter
- Reversing camera system
- Engine shutdown valves (for both engines)


Dimensions

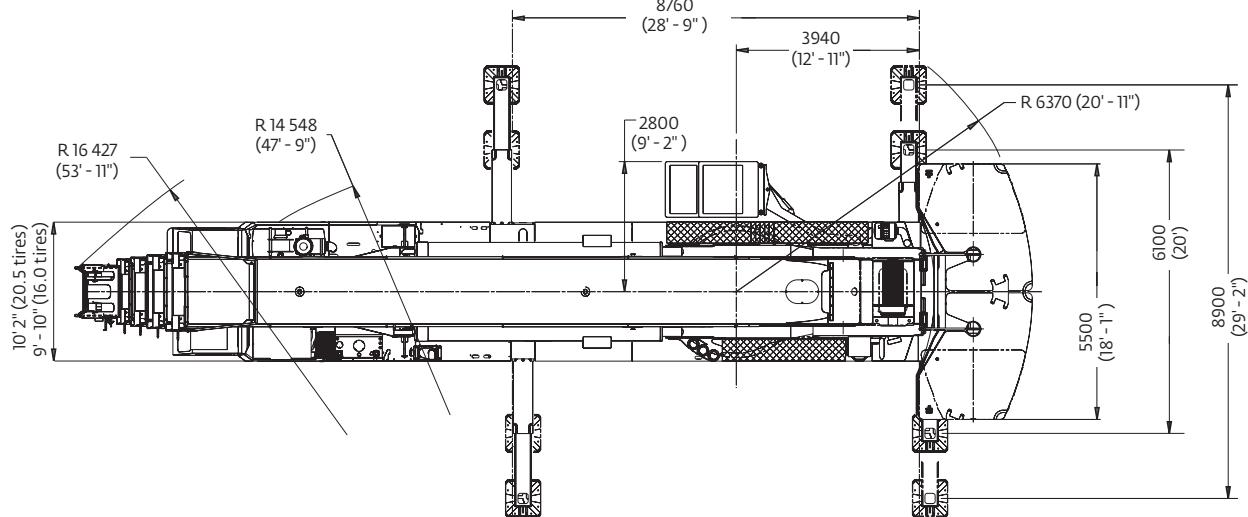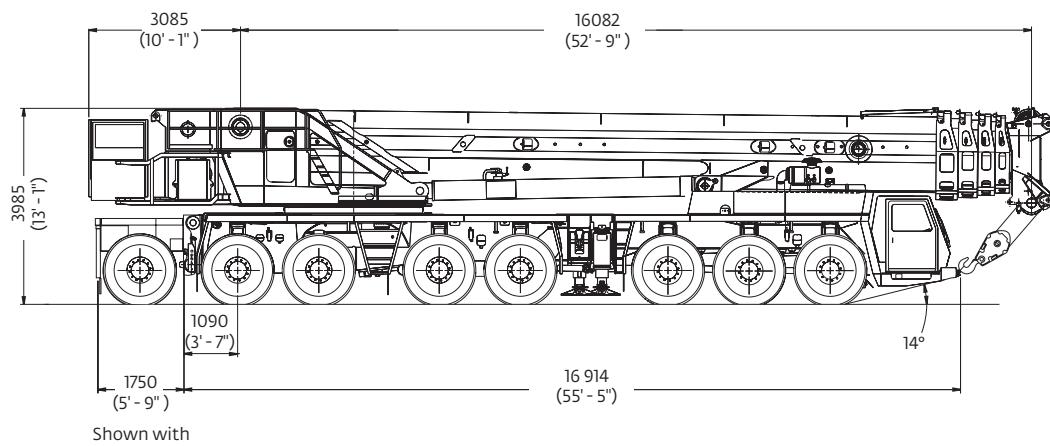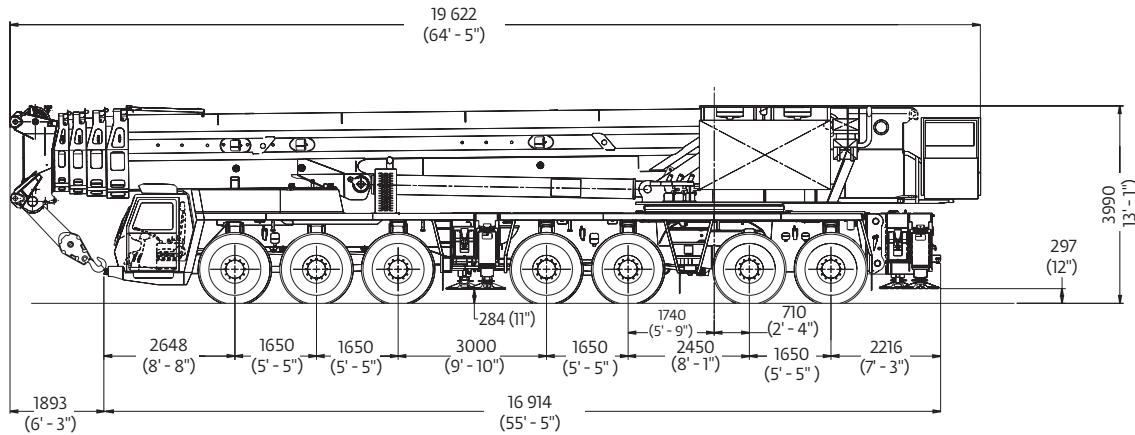

Dimensions

Luffing jib combinations

Without angle offset

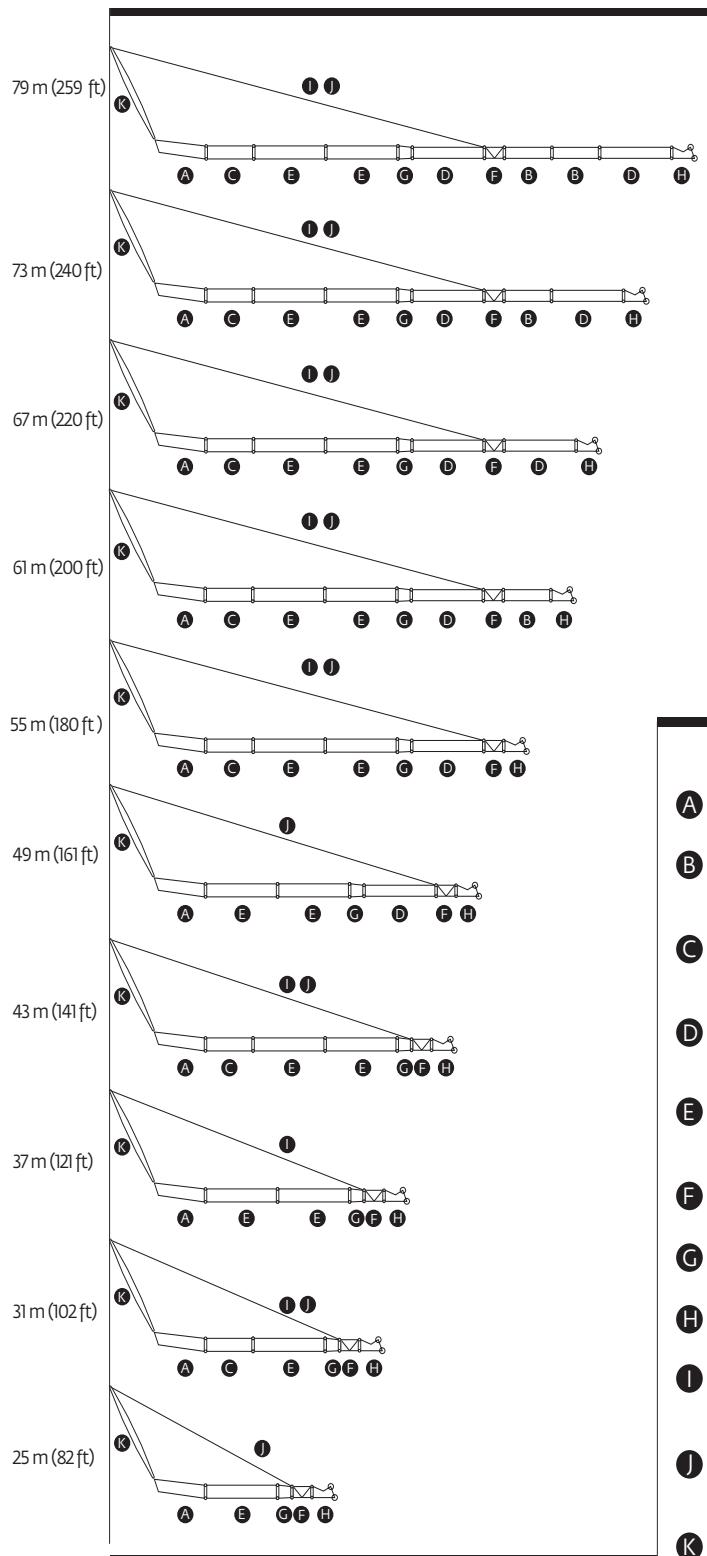


Description	Length x width x height m (ft)	Weight in kg (lb)
A Foot Section	8.80 x 1.80 x 2.50 (28.87 x 5.90 x 8.20)	3700 (8160)
B Short intermediate sections, small cross-section, each	6.20 x 1.50 x 1.500 (20.34 x 4.91 x 4.91)	900
C Short intermediate sections, large cross-section, each	6.20 x 1.80 x 1.90 (20.34 x 5.90 X 6.23)	1000 (2205)
D Long intermediate sections, small cross-section, each	12.20 x 1.50 x 1.50 (40.03 x 4.91 x 4.91)	1600 (3530)
E Long intermediate sections, large cross-section, each	12.20 x 1.80 x 1.90 (40.03 x 5.90 x 6.23)	1600 (3530)
F Angle piece	3.70 x 1.50 x 1.80 (12.14 x 4.91 x 5.90)	1600 (3530)
G Reducing piece	1.20 x 1.80 x 1.90 (3.94 x 5.90 x 6.23)	500 (1105)
H Head piece	3.20 x 1.50 x 2.10 (10.50 x 4.91 x 6.89)	1200 (2650)
I Rear pendant link for short intermediate section	6.20 x 0.20 x 0.20 (20.34 x 0.70 x 0.70)	200 (440)
J Rear pendant link for long intermediate section	12.20 x 0.20 x 0.20 (40.03 x 0.70 x 0.70 80)	400 (880)
K Luffing control arm with fall-back guard strut	12.20 x 2.10 x 1.80 (40.03 x 6.89 x 5.90)	3200 (7055)

*Individual weight of rear pendant link: 360 kg (795 lb)

Dimensions

Lattice boom extension combinations


Without angle offset

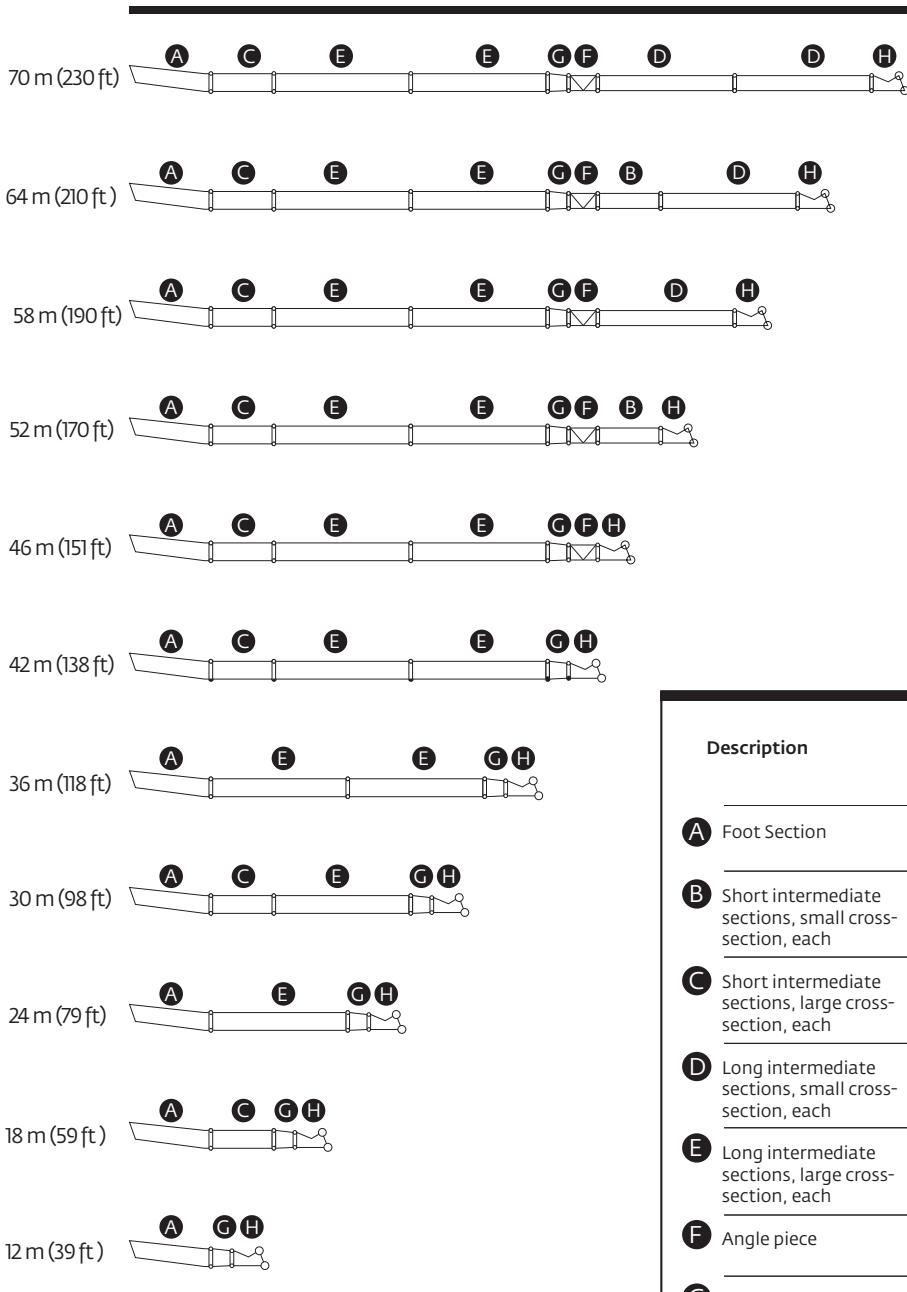


Description	Length x width x height m (ft)	Weight in kg (lb)
A Foot Section	8.80 x 1.80 x 2.50 (28.87 x 5.90 x 8.20)	3700 (8160)
B Short intermediate sections, small cross-section, each	6.20 x 1.50 x 1.50 (20.34 x 4.91 x 4.91)	900 (1985)
C Short intermediate sections, large cross-section, each	6.20 x 1.80 x 1.90 (20.34 x 5.90 X 6.23)	1000 (2205)
D Long intermediate sections, small cross-section, each	12.20 x 1.50 x 1.50 (40.03 x 4.91 x 4.91)	1600 (3530)
E Long intermediate sections, large cross-section, each	12.20 x 1.80 x 1.90 (40.03 x 5.90 x 6.23)	1600 (3530)
F Angle piece	3.70 x 1.50 x 1.80 (12.14 x 4.91 x 5.90)	1600 (3530)
G Reducing piece	1.20 x 1.80 x 1.90 (3.94 x 5.90 x 6.23)	500 (1105)
H Head piece	3.20 x 1.50 x 2.10 (10.50 x 4.91 x 6.89)	1200 (2650)

Dimensions


Aerial rigging of jib

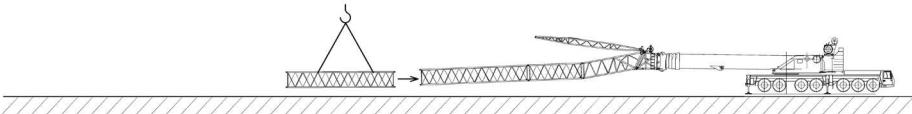


1

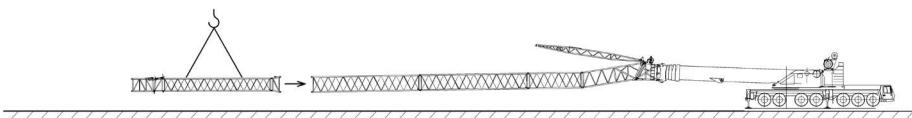


2

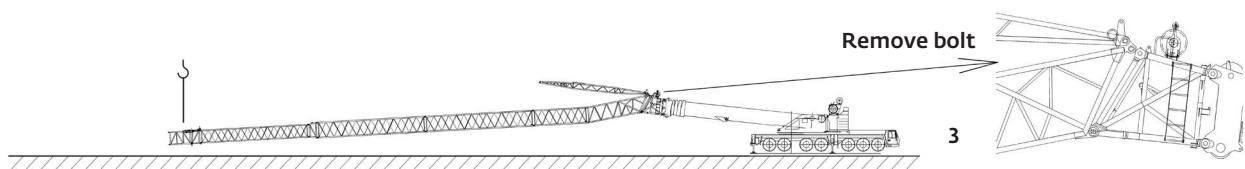


3

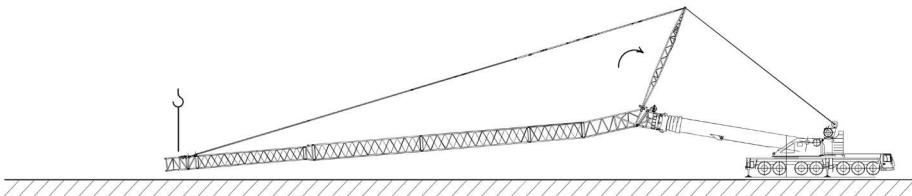

4

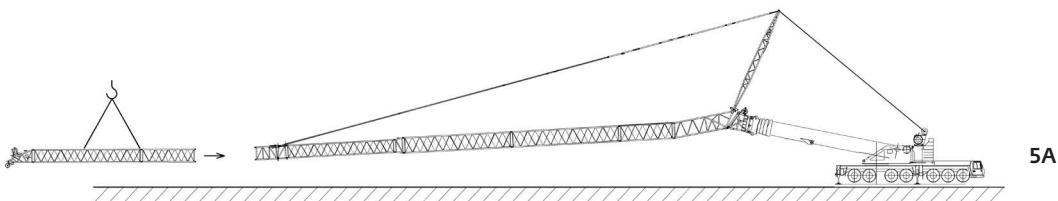


5A

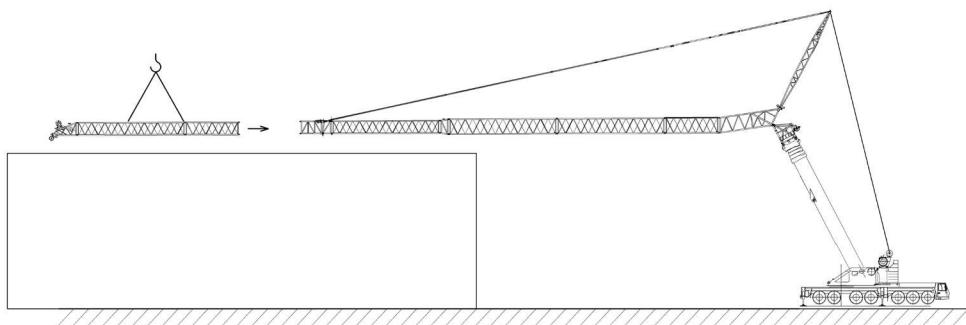

5B



Rigging on obstacles

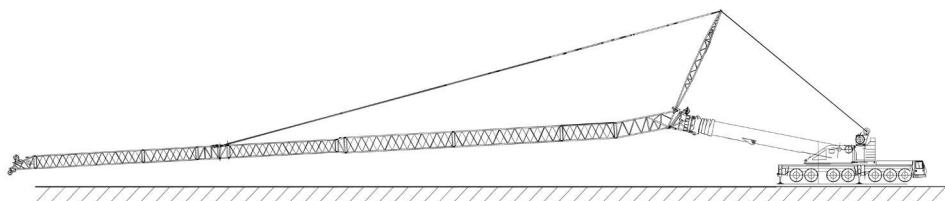


6

Dimensions

Aerial rigging of jib

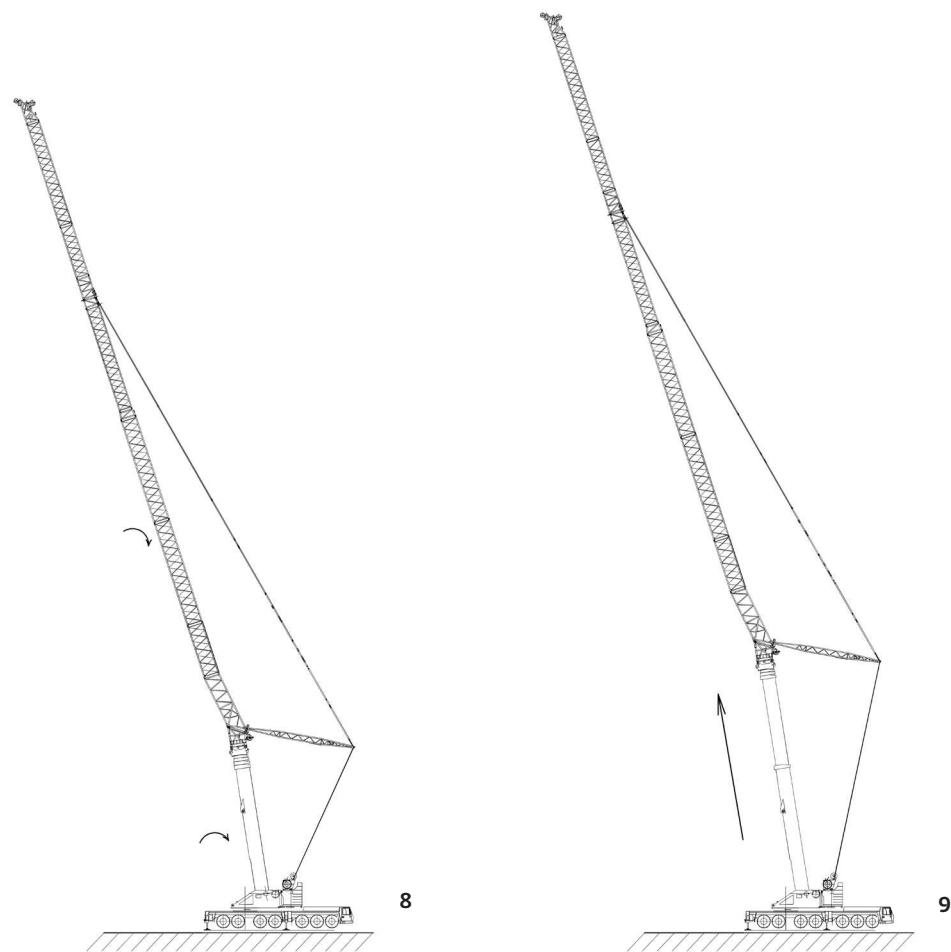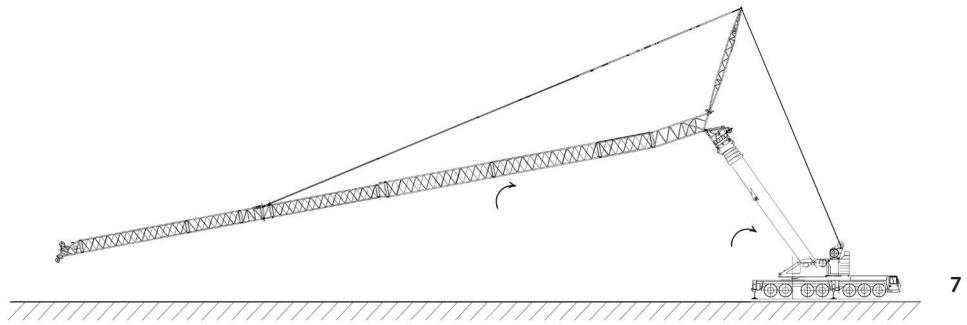


Counterweight

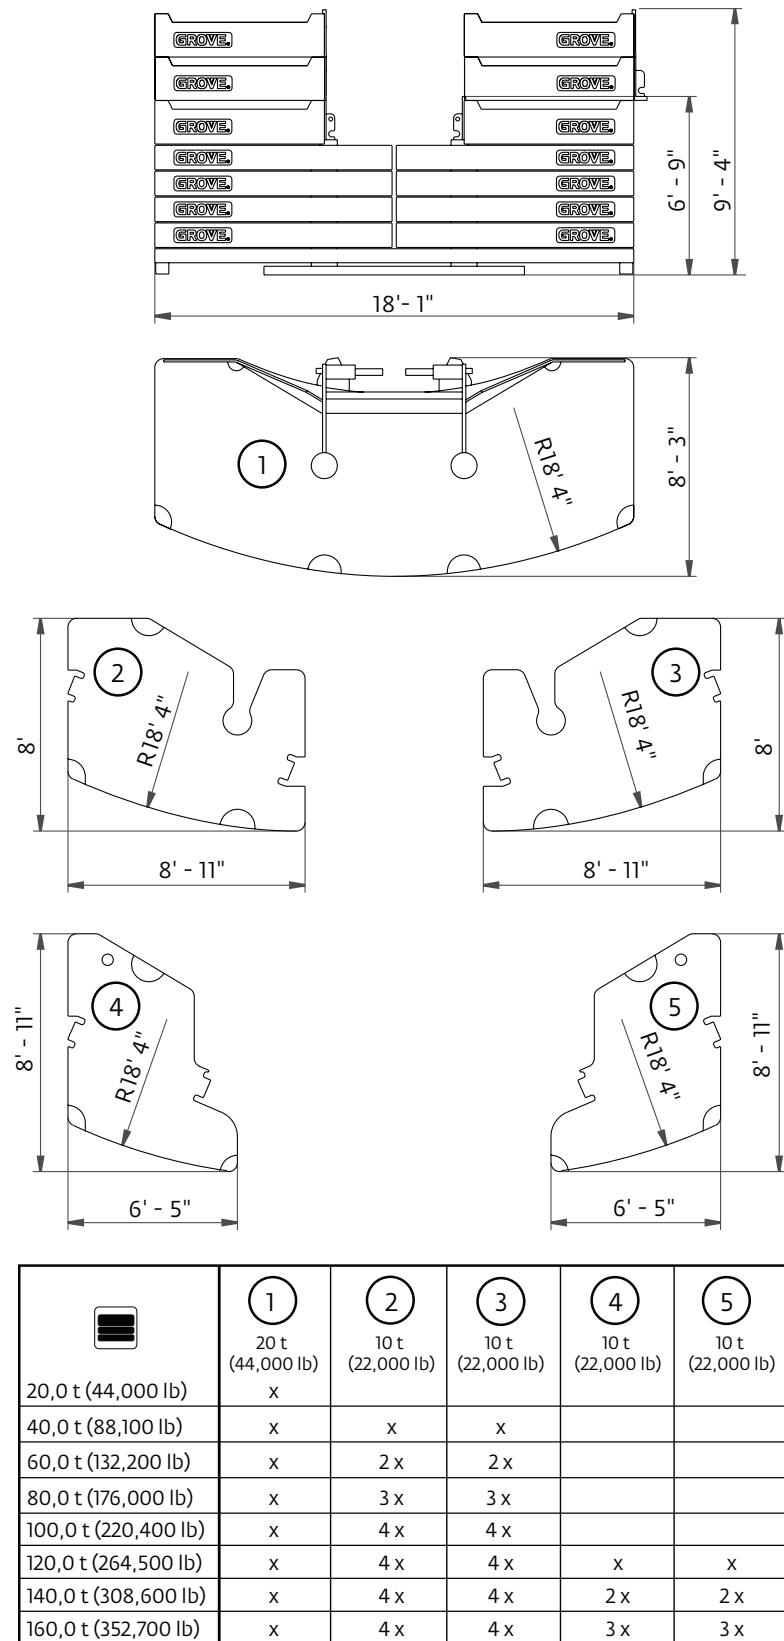

Travel proposals

Trailing boom dolly with 8th axle

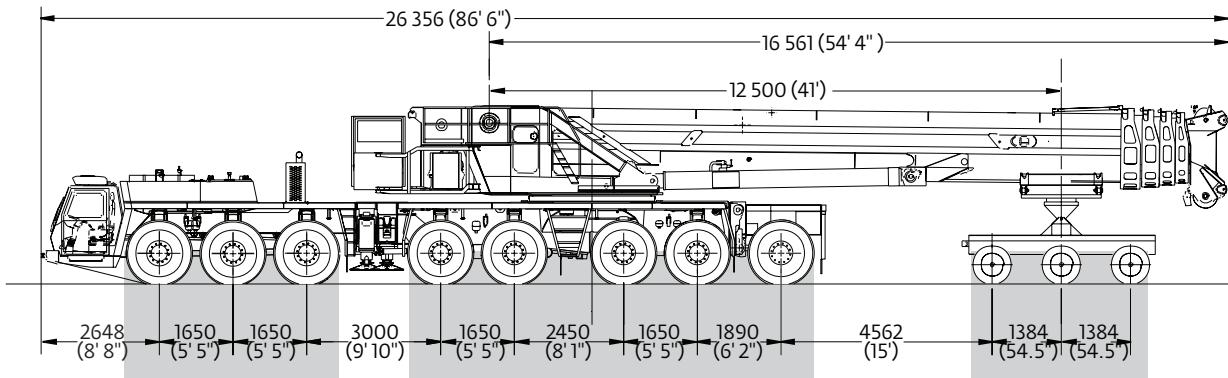


	Axes 1 - 3	Axes 4 - 8	Dolly	Total GVW
Boom in dolly over rear, rear outrigger box removed, 8th axle installed	26 254 kg (57,879 lb)	38 388 kg (84,631 lb)	26 822 kg (59,132 lb)	91 464 kg (201,642 lb)

Unit equipped with:

- 20.5 tires on aluminum rims - axles 1 through 8
- Operator, 75 kg (165 lb)
- Welded on MEGAWINGLIFT hardware
- Dolly weight: 3900 kg (8600 lb)

Allow 3% variation in weight due to manufacturing tolerances

Boom removed, superstructure over rear

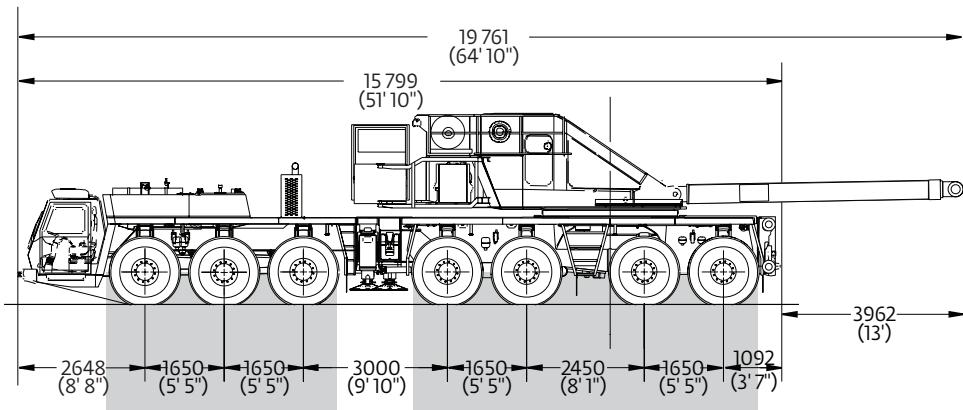

	Axes 1 - 3	Axes 4 - 7	Total GVW
Boom removed, superstructure over rear	16 717 kg (36,855 lb)	34 879 kg (76,895 lb)	51 597 kg (113,750 lb)


Unit equipped with:

- Rear outrigger box removed
- 20.5 tires on aluminum rims
- Operator, 75 kg (165 lb)

Allow 3% variation in weight due to manufacturing tolerances

Travel proposals

Boom over front

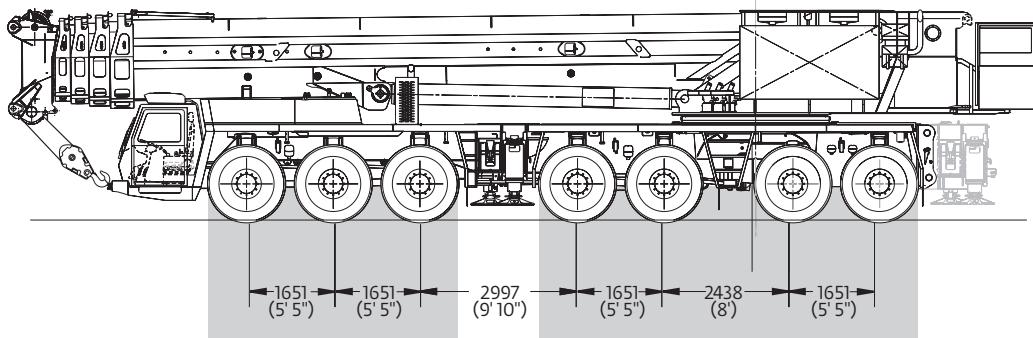


	Axes 1 - 3	Axes 4 - 7/8	Total GVW
Boom over front, rear outrigger box removed	37 724 kg (83,167 lb)	47 502 kg (104,722 lb)	85 226 kg (187,889 lb)
Boom over front, rear outrigger box installed	33 762 kg (74,431 lb)	58 193 kg (128,292 lb)	91 955 kg (202,723 lb)
Boom over front, 8th axle installed	43 562 kg (96,038 lb)	44 000 kg (97,003 lb)	87 563 kg (193,041 lb)

Unit equipped with:

- 20.5 tires on aluminum rims
- Operator, 75 kg (165 lb)
- Welded on MEGAWINGLIFT hardware

Allow 3% variation in weight due to manufacturing tolerances

Trailing boom (spread dolly) with axles 3 and 6 raised

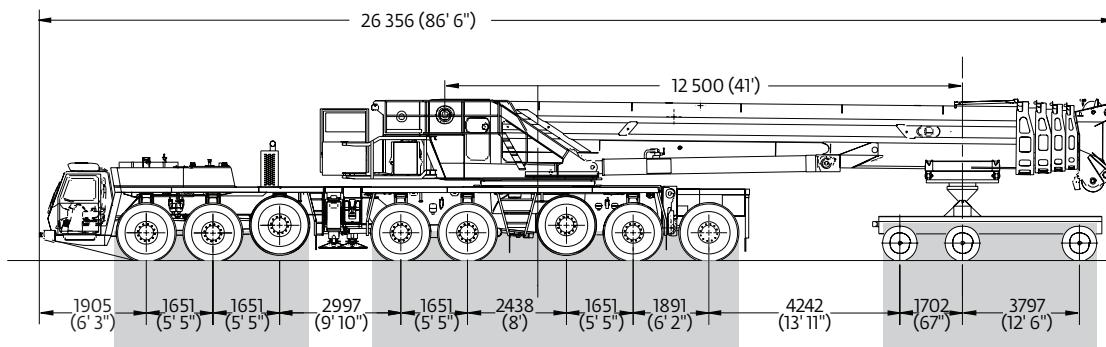

Axes 1 - 2 Axles 4, 5, 7, 8 Dolly Total GVW

	Axes 1 - 2	Axes 4, 5, 7, 8	Dolly	Total GVW
Boom in dolly over rear, rear outrigger box removed, 8th axle installed, axles 3 and 6 raised	23 899 kg (52,689 lb)	40 743 kg (89,821 lb)	27 485 kg (60,594 lb)	92 127 kg (203,104 lb)

Unit equipped with:


- 20.5 tires on aluminum rims - axles 1 through 8
- Operator, 75 kg (165 lb)
- Welded on MEGAWINGLIFT hardware
- 3 axle dolly (4563 kg (10,000 lb))

Allow 3% variation in weight due to manufacturing tolerances

Working range

Main boom

197 ft main boom

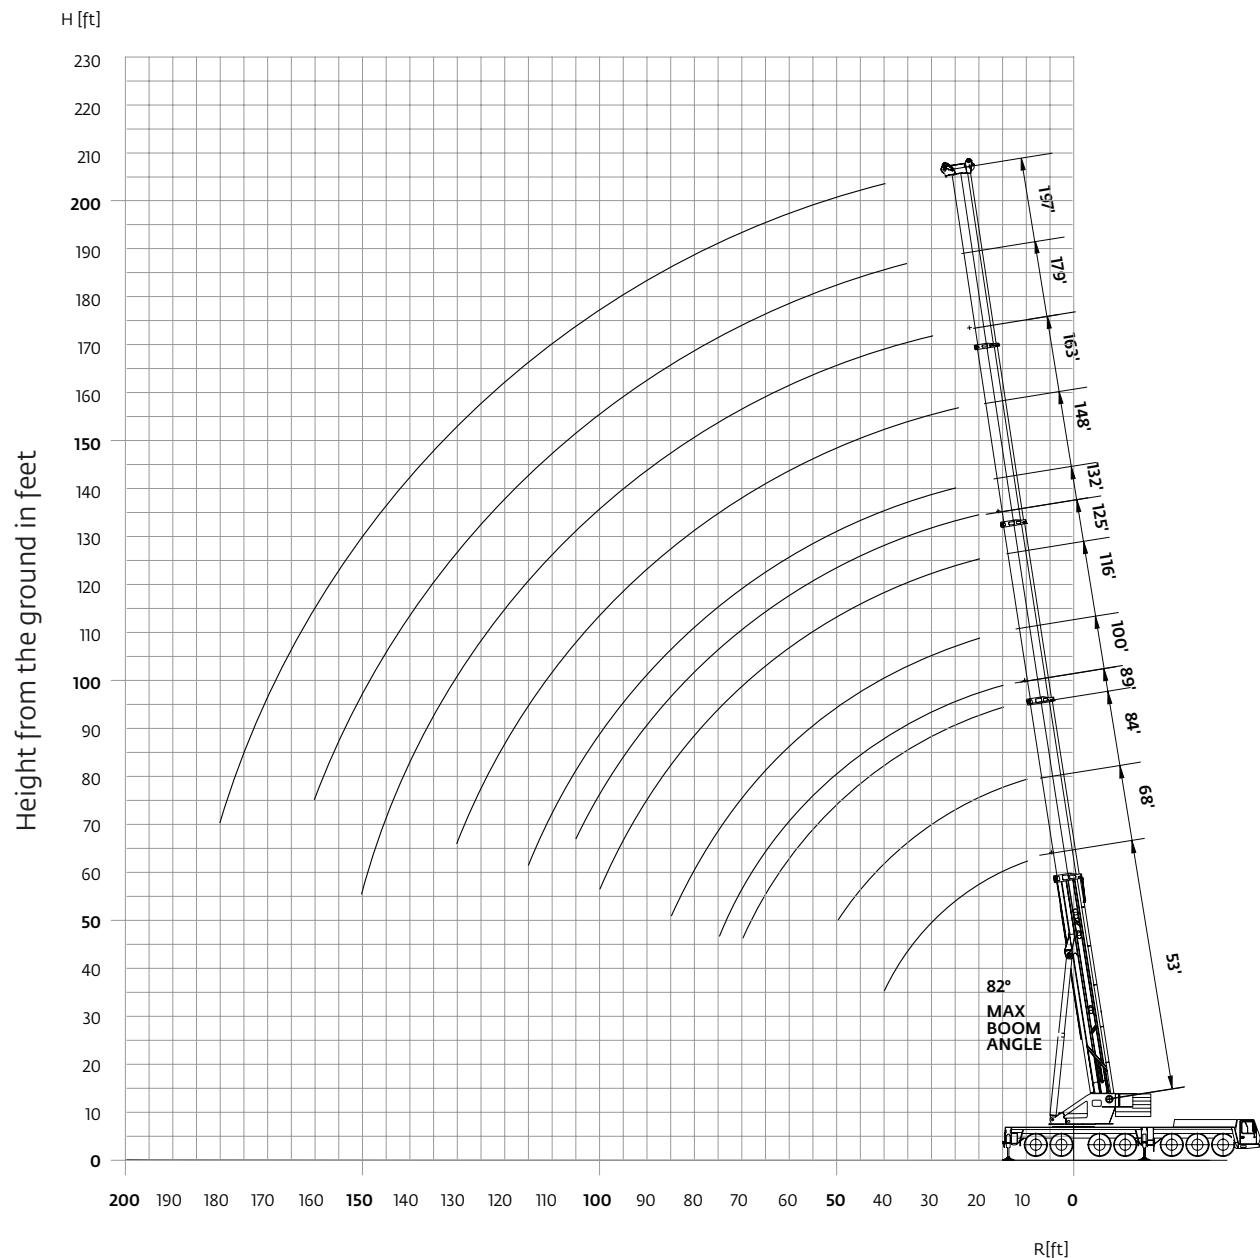

Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load charts

Main boom

16,0 m - 60 m
(53 ft - 197 ft)

120 000 kg
(264,500 lb)

29 ft 2 in spread
(100%)

360°

Feet	Pounds (thousands)											
	52.6	68.4	84.3	88.9	100.1	115.9	125.1	131.7	147.6	163.4	179.2	196.9
8	*1100.0											
10	678.0	624.0										
15	538.0	536.0	496.0	300.0	410.0	372.0	284.0					
20	438.0	442.0	438.0	300.0	368.0	346.0	256.0	254.0				
25	370.0	374.0	374.0	300.0	318.0	316.0	232.0	228.0	204.0	181.0		
30	318.0	320.0	320.0	298.0	318.0	316.0	232.0	228.0	206.0	186.0	168.0	146.0
35	276.0	280.0	280.0	270.0	278.0	282.0	206.0	207.0	186.0	168.0	155.0	141.0
40	242.0	244.0	246.0	238.0	244.0	246.0	187.0	186.0	168.0	155.0	142.0	123.0
45		215.0	216.0	209.0	219.0	217.0	170.0	170.0	154.0	142.0	131.0	119.0
50		194.0	196.0	185.0	195.0	193.0	154.0	155.0	141.0	131.0	122.0	112.0
55			176.0	165.0	175.0	174.0	143.0	145.0	129.0	121.0	114.0	105.0
60			159.0	147.0	159.0	157.0	132.0	136.0	120.0	111.0	106.0	98.0
65			144.0	136.0	144.0	142.0	121.0	128.0	111.0	104.0	98.0	92.0
70			131.0	122.0	130.0	127.0	111.0	119.0	102.0	97.0	92.0	86.0
75				109.0	117.0	114.0	104.0	113.0	96.0	90.0	87.0	80.0
80					106.0	104.0	95.0	107.0	90.0	83.0	81.0	76.0
85						97.0	94.0	86.0	98.0	84.0	79.0	75.0
90							87.0	78.0	90.0	79.0	75.0	71.0
95								84.0	70.0	82.0	75.0	70.0
100									79.0	64.0	76.0	72.0
105										59.0	70.0	69.0
110											65.0	66.0
115												61.0
120												57.0
125												54.0
130												50.0
135												46.0
140												43.4
145												41.2
150												39.6
155												40.6
160												37.6
165												38.2
170												33.6
175												31.4
180												29.4

Loads > 420,000 lb can only be lifted with additional equipment

* Over rear, 20 ft outrigger span, with special equipment

16,0 m - 60 m
(53 ft - 197 ft)

100 000 kg
(220,400 lb)

29 ft 2 in spread
(100%)

360°

Feet	Pounds (thousands)											
	52.6	68.4	84.3	88.9	100.1	115.9	125.1	131.7	147.6	163.4	179.2	196.9
8	*788.0											
10	664.0	624.0										
15	526.0	524.0	496.0	300.0	410.0	372.0	284.0					
20	428.0	432.0	432.0	300.0	362.0	346.0	256.0	254.0				
25	360.0	364.0	364.0	300.0	362.0	346.0	256.0	254.0				
30	308.0	312.0	312.0	298.0	310.0	314.0	232.0	228.0	204.0	181.0		
35	264.0	268.0	268.0	262.0	272.0	270.0	206.0	207.0	186.0	168.0	146.0	
40	228.0	232.0	236.0	226.0	236.0	234.0	187.0	186.0	168.0	155.0	141.0	123.0
45		206.0	208.0	196.0	207.0	205.0	170.0	170.0	154.0	142.0	131.0	119.0
50		180.0	183.0	172.0	183.0	180.0	154.0	155.0	141.0	131.0	122.0	112.0
55			159.0	150.0	158.0	155.0	143.0	145.0	129.0	121.0	114.0	105.0
60			139.0	130.0	139.0	136.0	127.0	136.0	120.0	111.0	106.0	98.0
65			123.0	115.0	123.0	120.0	111.0	124.0	111.0	104.0	98.0	92.0
70			110.0	108.0	109.0	109.0	98.0	111.0	102.0	97.0	92.0	86.0
75				96.0	98.0	102.0	87.0	99.0	94.0	90.0	87.0	80.0
80					89.0	93.0	80.0	90.0	88.0	83.0	81.0	76.0
85						81.0	84.0	75.0	82.0	83.0	78.0	75.0
90							77.0	70.0	74.0	76.0	71.0	67.0
95								71.0	65.0	68.0	69.0	67.0
100									65.0	60.0	64.0	63.0
105										55.0	61.0	59.0
110											50.0	54.0
115												49.0
120												46.0
125												44.0
130												41.2
135												36.4
140												34.0
145												31.6
150												29.4
155												27.2
160												25.2
165												23.4
170												21.6
175												20.0
180												18.4

Loads > 420,000 lb can only be lifted with additional equipment

* Over rear, 20 ft outrigger span, with special equipment

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane

Load charts

Main boom

16,0 m - 60 m
 (53 ft - 197 ft) 80 000 kg
 (176,300 lb) 29 ft 2 in spread
 (100%) 360°

Feet	Pounds (thousands)											
	52.6	68.4	84.3	88.9	100.1	115.9	125.1	131.7	147.6	163.4	179.2	196.9
8												
10	650.0	624.0										
15	512.0	514.0	496.0	300.0	410.0	372.0	284.0					
20	418.0	420.0	420.0	300.0	410.0	372.0	232.0	228.0	204.0	181.0		
25	352.0	354.0	354.0	300.0	352.0	346.0	256.0	254.0				
30	294.0	298.0	298.0	290.0	300.0	296.0	232.0	228.0	186.0	168.0	146.0	
35	250.0	252.0	258.0	246.0	256.0	242.0	206.0	207.0	186.0	168.0	141.0	123.0
40	203.0	213.0	216.0	206.0	215.0	203.0	187.0	186.0	168.0	155.0	141.0	
45	176.0	180.0	170.0	179.0	174.0	160.0	168.0	154.0	142.0	131.0	119.0	
50	149.0	153.0	143.0	152.0	149.0	138.0	150.0	139.0	131.0	122.0	112.0	
55		131.0	129.0	131.0	133.0	119.0	131.0	121.0	119.0	114.0	105.0	
60		115.0	112.0	114.0	118.0	107.0	115.0	112.0	105.0	105.0	98.0	
65		103.0	98.0	100.0	105.0	98.0	102.0	102.0	99.0	94.0	92.0	
70		91.0		94.0	93.0	76.0	90.0	92.0	89.0	85.0	83.0	
75			83.0	85.0	84.0	76.0	84.0	82.0	81.0	75.0		
80				76.0	75.0	70.0	77.0	74.0	73.0	70.0	68.0	
85					69.0	68.0	62.0	69.0	68.0	66.0	63.0	62.0
90						58.0	63.0	62.0	60.0	58.0	56.0	
95						58.0	55.0	58.0	56.0	54.0	53.0	52.0
100						53.0	53.0	51.0	50.0	48.0	47.0	
105						49.0	48.0	47.0	45.0	43.4	43.6	
110						46.0	45.0	43.2	41.4	39.4	39.6	
115						41.0	39.6	37.8	36.0	36.2		
120							36.4	34.6	32.8	33.0		
125							33.6	31.8	29.8	30.0		
130							31.0	29.2	27.2	27.4		
135								26.8	24.8	25.0		
140								24.6	22.6	22.6		
145								22.6	20.4	20.6		
150								20.8	18.6	18.6		
155									16.8	17.0		
160									15.2	15.2		
165										13.8		
170										12.4		
175										11.0		
180										9.8		

Loads > 420,000 lb can only be lifted with additional equipment

16,0 m - 60 m
 (53 ft - 197 ft) 60 000 kg
 (132,200 lb) 29 ft 2 in spread
 (100%) 360°

Feet	Pounds (thousands)											
	52.6	68.4	84.3	88.9	100.1	115.9	125.1	131.7	147.6	163.4	179.2	196.9
10	634.0	624.0										
15	500.0	500.0	496.0	300.0	408.0	372.0	284.0					
20	406.0	410.0	410.0	300.0	408.0	372.0	256.0	254.0				
25	336.0	340.0	340.0	300.0	338.0	314.0	226.0	228.0	204.0	181.0		
30	268.0	276.0	278.0	254.0	262.0	244.0	199.0	194.0	179.0	168.0	146.0	
35	205.0	215.0	219.0	208.0	212.0	182.0	151.0	161.0	150.0	143.0	141.0	123.0
40	162.0	171.0	175.0	172.0	174.0	170.0	151.0	161.0	150.0	143.0	141.0	
45	141.0	145.0	142.0	144.0	145.0	135.0	135.0	136.0	133.0	127.0	121.0	116.0
50	118.0	124.0	119.0	126.0	125.0	115.0	119.0	114.0	110.0	104.0	101.0	
55	106.0	107.0	109.0	108.0	108.0	100.0	106.0	101.0	96.0	91.0	88.0	
60	92.0	93.0	95.0	94.0	88.0	94.0	89.0	85.0	80.0	78.0		
65	81.0	82.0	83.0	84.0	81.0	83.0	79.0	75.0	71.0	69.0		
70	71.0	72.0	74.0	74.0	75.0	74.0	71.0	67.0	63.0	61.0		
75		64.0	66.0	66.0	67.0	66.0	64.0	60.0	56.0	55.0		
80		59.0	59.0	60.0	59.0	59.0	58.0	54.0	51.0	49.0		
85			53.0	53.0	54.0	53.0	52.0	49.0	46.0	44.0		
90				48.0	49.0	48.0	46.0	44.0	41.0	40.0		
95				43.6	44.0	43.2	41.8	40.0	37.0	36.2		
100				39.6	40.2	39.2	37.8	36.0	33.4	32.6		
105					36.6	35.6	34.2	32.4	30.2	29.4		
110					33.2	32.2	30.8	29.0	27.2	26.6		
115						29.2	27.8	26.0	24.4	24.0		
120							25.2	23.4	21.6			
125							22.8	21.0	19.2			
130								20.6	18.8	16.8		
135									16.8	14.8	15.0	
140									13.4	11.2	11.4	
145									11.8	9.8	9.8	
150										8.2	8.4	
155										7.0		
160											5.8	
165											4.6	
170											3.6	
175												

Loads > 420,000 lb can only be lifted with additional equipment


16,0 m - 45 m
 (53 ft - 148 ft) 0 kg
 (0 lb) 29 ft 2 in spread
 (100%) 360°

Feet	Pounds (thousands)										
	52.6	68.4	84.3	88.9	100.1	115.9	125.1	131.7	147.6		
10	586.0	584.0									
15	440.0	366.0	302.0	278.0							
20	199.0	180.0	163.0	159.0	146.0	130.0	124.0				
25	114.0	111.0	106.0	104.0	99.0	90.0	87.0	81.0	53.0		
30	72.0	75.0	74.0	73.0	71.0	66.0	64.0	60.0	40.2		
35	49.0	53.0	54.0	54.0	53.0	50.0	49.0	45.0	30.6		
40	34.0	38.6	40.6	41.0	40.4	38.2	37.6	34.8	23.4		
45	28.2	30.8	31.4	31.4	29.8	29.4	27.0	17.6			
50	20.6	23.4	24.0	24.4	23.0	23.0	23.0	20.8	13.0		
55	17.6	18.2	18.8	18.8	17.8	17.8	16.0	9.2			
60		13.0	13.6	14.2	13.6	13.6	11.8	6.0			
65		9.2	9.8	10.6	10.0	10.2	8.4				
70		6.0	6.8	7.6	7.0	7.2	5.6				
75				4.0	5.0	4.4	4.8				

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Working range

Main boom and MegaWingLift™

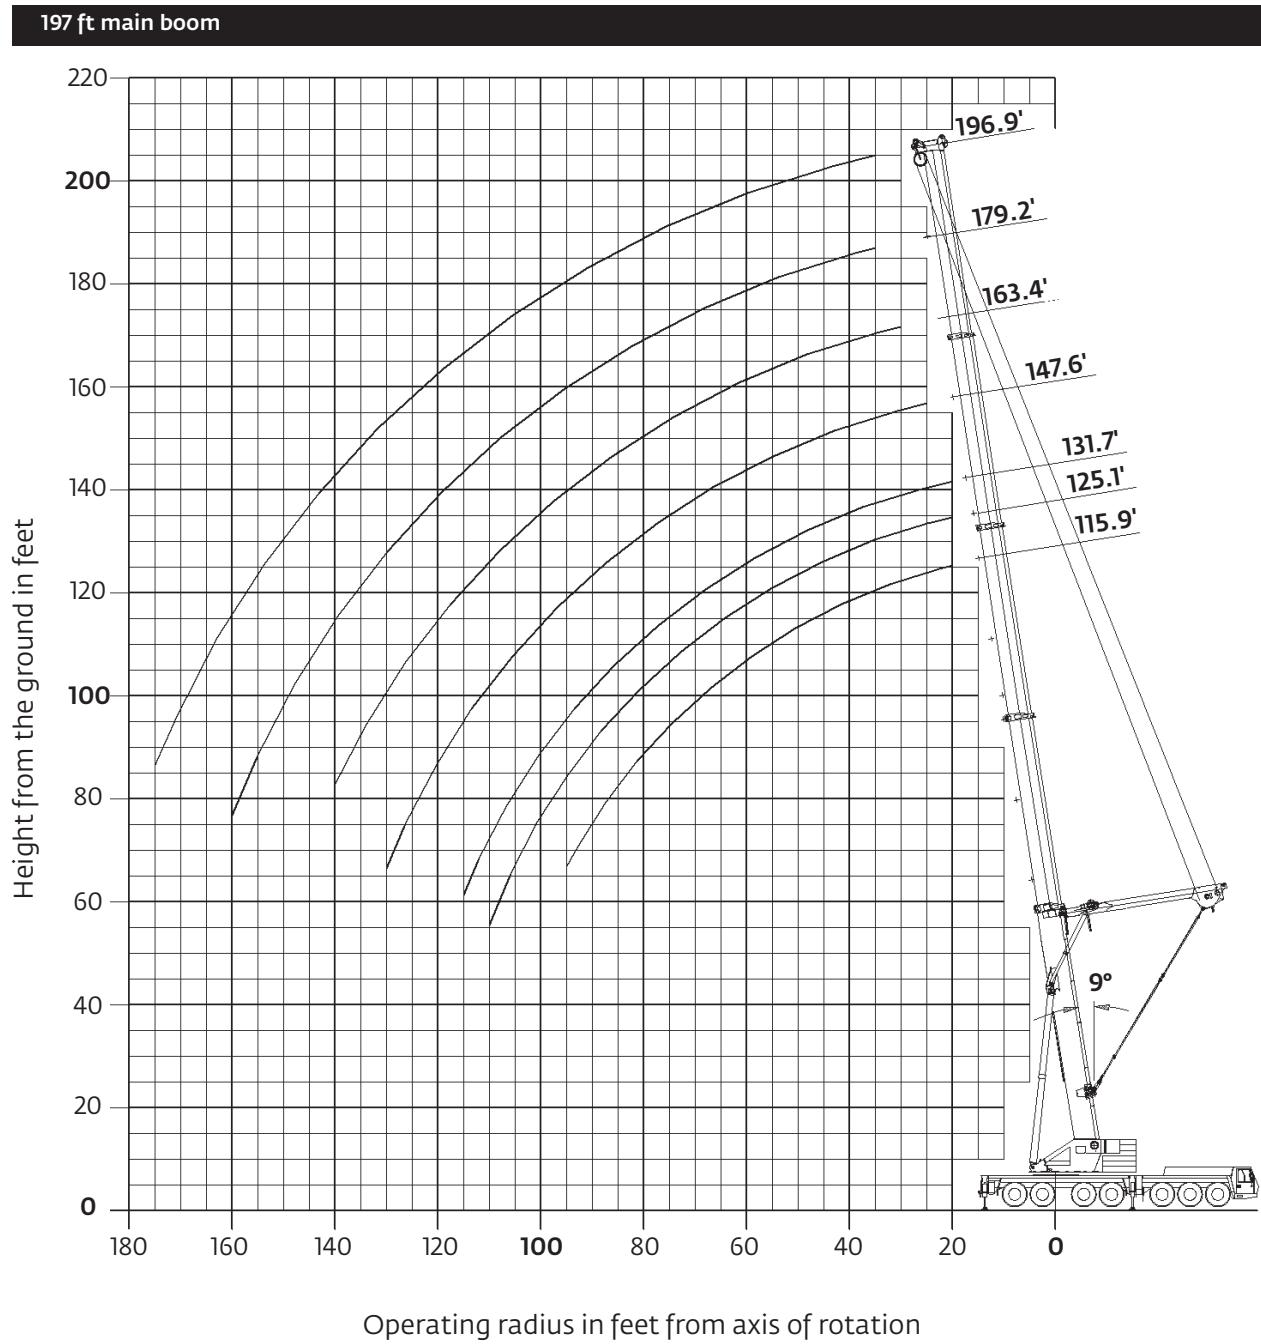

Load charts

Main boom and MegaWingLift™

 35,3 m - 60 m
 160 000 kg
 29 ft 2 in spread
 360°

	 Pounds (thousands)						
Feet	115.9	125.1	131.7	147.6	163.4	179.2	196.9
20	352.0	270.0	330.0				
25	324.0	254.0	310.0	298.0			
30	298.0	242.0	280.0	268.0	222.0	213.0	
35	274.0	230.0	258.0	244.0	211.0	200.0	167.0
40	242.0	219.0	240.0	226.0	200.0	186.0	158.0
45	222.0	209.0	219.0	212.0	190.0	175.0	149.0
50	200.0	195.0	197.0	193.0	181.0	164.0	142.0
55	182.0	180.0	181.0	175.0	172.0	154.0	134.0
60	166.0	167.0	166.0	163.0	161.0	146.0	127.0
65	153.0	153.0	152.0	147.0	138.0	121.0	
70	140.0	141.0	140.0	139.0	138.0	130.0	115.0
75	129.0	130.0	129.0	128.0	127.0	124.0	110.0
80	120.0	120.0	120.0	119.0	118.0	116.0	104.0
85	111.0	112.0	111.0	110.0	109.0	108.0	100.0
90	104.0	104.0	104.0	103.0	102.0	100.0	96.0
95	97.0	97.0	97.0	96.0	95.0	93.0	91.0
100	91.0	91.0	90.0	89.0	87.0	87.0	
105	86.0	85.0	84.0	83.0	82.0	82.0	
110	73.0	80.0	79.0	78.0	77.0	77.0	
115			71.0	75.0	73.0	72.0	72.0
120				70.0	69.0	68.0	68.0
125				67.0	65.0	63.0	64.0
130				58.0	61.0	60.0	60.0
135					58.0	56.0	56.0
140					54.0	53.0	53.0
145						49.0	50.0
150						46.0	47.0
155						43.6	44.0
160						38.4	41.4
165							39.0
170							36.8
175							33.8

 35,3 m - 60 m
 120 000 kg
 29 ft 2 in spread
 360°

	 Pounds (thousands)						
Feet	115.9	125.1	131.7	147.6	163.4	179.2	196.9
20	352.0	270.0	330.0				
25	324.0	254.0	310.0	298.0			
30	298.0	242.0	280.0	268.0	222.0	213.0	
35	260.0	230.0	258.0	244.0	211.0	200.0	167.0
40	236.0	219.0	232.0	226.0	200.0	186.0	158.0
45	208.0	204.0	206.0	202.0	190.0	175.0	149.0
50	185.0	186.0	186.0	185.0	180.0	164.0	142.0
55	167.0	167.0	167.0	166.0	165.0	154.0	134.0
60	151.0	152.0	151.0	150.0	149.0	146.0	127.0
65	137.0	138.0	138.0	137.0	136.0	134.0	121.0
70	125.0	126.0	125.0	124.0	123.0	122.0	115.0
75	115.0	115.0	115.0	114.0	112.0	111.0	110.0
80	104.0	105.0	104.0	103.0	102.0	100.0	
85	94.0	95.0	95.0	93.0	92.0	90.0	91.0
90	86.0	87.0	86.0	85.0	84.0	82.0	83.0
95	79.0	80.0	79.0	78.0	77.0	75.0	76.0
100	74.0	73.0	72.0	71.0	69.0	69.0	
105	68.0	67.0	66.0	65.0	63.0	64.0	
110	63.0	63.0	61.0	60.0	58.0	59.0	
115		58.0	57.0	56.0	54.0	54.0	
120			53.0	52.0	50.0	50.0	
125			49.0	48.0	46.0	46.0	
130			46.0	45.0	42.8	43.0	
135				41.4	39.6	40.0	
140				38.6	36.8	37.2	
145					34.2	34.4	
150					31.8	32.0	
155					29.6	29.8	
160					27.6	27.6	
165						25.8	
170						23.8	
175						22.2	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.


The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Luffing jib

82 ft - 240 ft luffing jib - 81° main boom

Height from the ground in feet

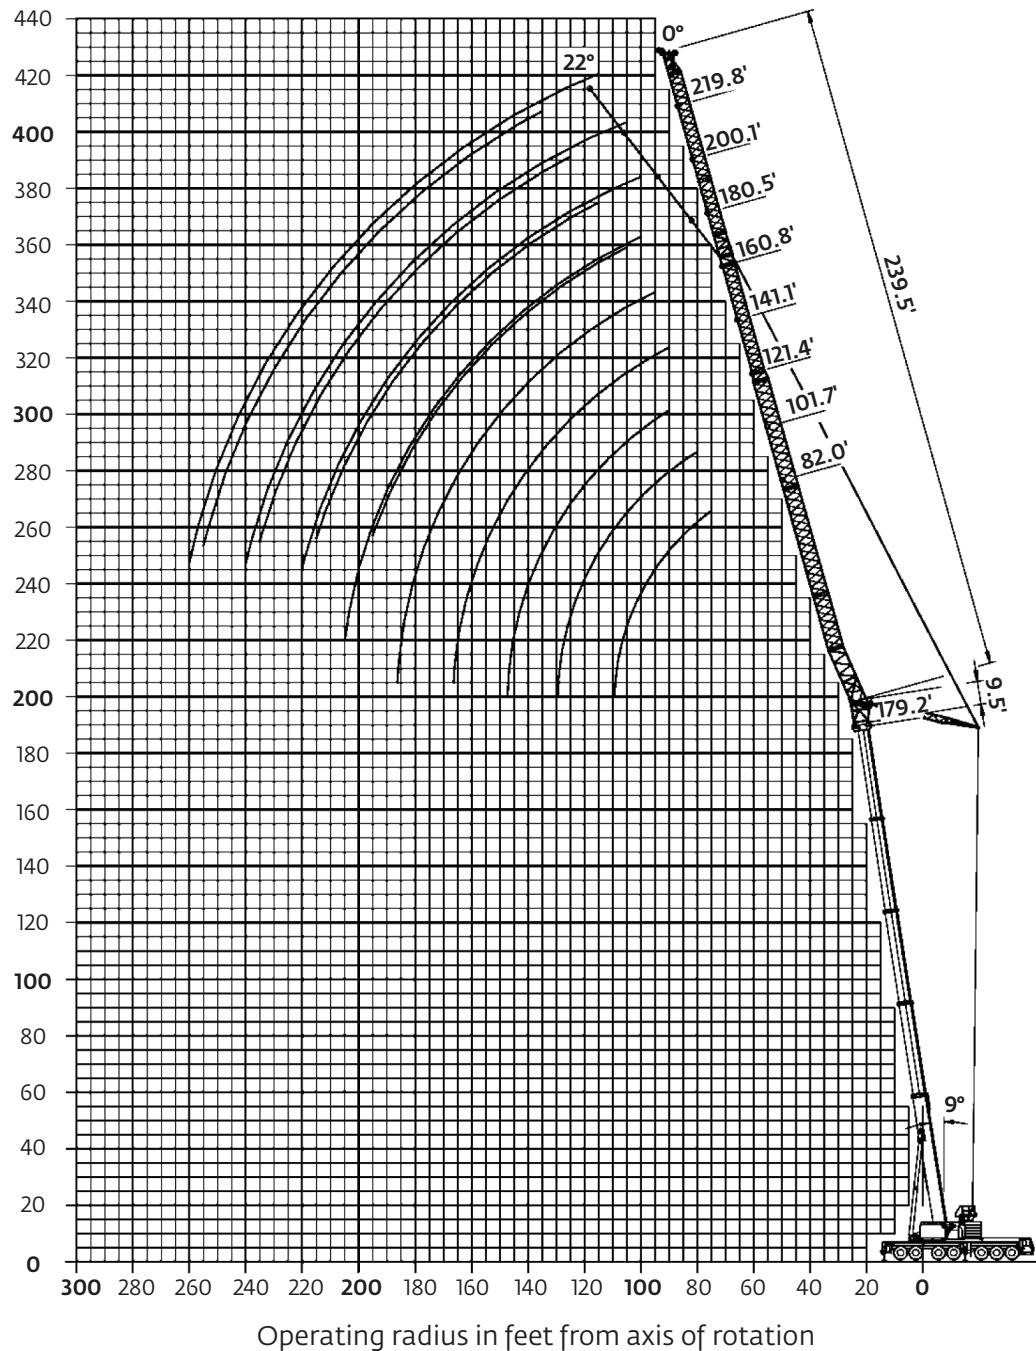

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load charts

Luffing jib

 81°
 16,0 m + 2,9 m
 (52.6 ft + 9.5 ft)

 25 m - 73 m
 (82 ft - 240 ft)

 120 000 kg
 (264,500 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
40	169.0	144.0							
45	160.0	140.0							
50	151.0	136.0	114.0	92.0					
55	142.0	132.0	111.0	91.0					
60	134.0	129.0	109.0	89.0	73.0				
65	128.0	125.0	106.0	88.0	72.0				
70	118.0	122.0	104.0	86.0	70.0	56.0	42.6		
75	102.0	118.0	102.0	84.0	69.0	54.0	41.4	32.6	
80	86.0	108.0	99.0	83.0	67.0	53.0	40.4	31.6	23.4
85	70.0	96.0	96.0	81.0	65.0	52.0	39.2	30.8	22.8
90		86.0	93.0	80.0	64.0	50.0	38.2	29.8	22.0
95		75.0	88.0	78.0	62.0	49.0	37.2	29.0	21.4
100		65.0	80.0	76.0	61.0	47.0	36.2	28.0	20.6
105			73.0	74.0	59.0	46.0	35.2	27.0	20.0
110			65.0	71.0	58.0	45.0	34.4	26.2	19.4
115			58.0	68.0	57.0	43.6	33.4	25.2	18.8
120			51.0	62.0	56.0	42.6	32.6	24.2	18.2
125				57.0	54.0	41.6	31.8	23.2	17.6
130				51.0	53.0	40.6	31.0	22.6	17.2
135				46.0	50.0	39.6	30.2	22.0	16.6
140					47.0	38.8	29.4	21.4	16.0
145					43.2	38.0	28.4	20.8	15.4
150					39.6	37.0	27.6	20.2	15.0
155					36.2	36.2	26.6	19.6	14.6
160						35.0	25.8	19.2	14.2
165						33.4	24.8	18.6	13.6
170						31.8	24.4	18.2	13.2
175						29.6	23.8	17.8	12.8
180							23.2	17.2	12.4
185							22.8	16.8	12.0
190							22.2	16.4	11.6
195							21.6	15.8	11.2
200								15.6	11.0
205								15.2	10.6
210								14.8	10.2
215								14.4	9.8
220									9.6
225									9.2
230									9.0
235									8.6

 81°
 25,7 m + 2,9 m
 (84.3 ft + 9.5 ft)

 25 m - 73 m
 (82 ft - 240 ft)

 120 000 kg
 (264,500 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
40									
45	154.0								
50	145.0	125.0							
55	137.0	123.0	100.0						
60	129.0	120.0	99.0	79.0					
65	122.0	118.0	98.0	79.0					
70	117.0	116.0	97.0	79.0	63.0				
75	112.0	113.0	95.0	78.0	62.0	49.0	38.4		
80	107.0	111.0	93.0	77.0	61.0	48.0	37.6	29.6	
85	100.0	109.0	92.0	76.0	60.0	47.0	36.8	28.6	
90	81.0	105.0	90.0	75.0	59.0	46.0	36.0	27.8	21.0
95		98.0	89.0	74.0	58.0	45.0	35.0	26.8	20.4
100		87.0	88.0	73.0	57.0	44.0	34.2	26.0	20.0
105		75.0	87.0	72.0	55.0	43.2	33.6	25.0	19.4
110		62.0	81.0	71.0	54.0	42.2	32.8	24.4	18.8
115			75.0	70.0	53.0	41.4	32.0	23.8	18.2
120			67.0	69.0	52.0	40.6	31.2	23.2	17.6
125				68.0	51.0	39.8	30.6	22.6	17.2
130				64.0	50.0	39.0	29.8	22.0	16.6
135				59.0	48.0	38.0	29.2	21.4	16.2
140				53.0	47.0	37.4	28.6	21.0	15.8
145					45.0	36.6	27.8	20.4	15.2
150					43.6	35.8	27.2	20.0	14.8
155					42.2	35.2	26.4	19.4	14.4
160					40.6	34.4	25.8	18.8	14.0
165						33.6	25.0	18.4	13.6
170						33.0	24.2	18.0	13.2
175						32.4	23.4	17.6	12.8
180						31.8	22.8	17.0	12.4
185							22.4	16.6	12.0
190							22.0	16.2	11.6
195							21.4	15.8	11.2
200							21.0	15.4	10.8
205								15.0	10.6
210								14.6	10.2
215								14.2	9.8
220								13.8	9.6
225									9.2
230									9.0
235									8.6

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load charts

Luffing jib

	81°		25 m - 73 m (82 ft - 240 ft)		120 000 kg (264,500 lb)		29 ft 2 in spread (100%)		360°
Pounds (thousands)									
Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
45									
50	116.0								
55	113.0	99.0							
60	107.0	99.0	80.0						
65	102.0	95.0	80.0						
70	97.0	92.0	80.0	65.0					
75	93.0	88.0	79.0	65.0	51.0				
80	89.0	84.0	77.0	64.0	51.0	40.4	32.0		
85	85.0	80.0	75.0	64.0	50.0	39.8	31.6		
90	82.0	77.0	72.0	63.0	49.0	39.2	31.2	23.8	
95	79.0	74.0	70.0	62.0	49.0	38.8	30.6	23.4	18.4
100	72.0	67.0	61.0	48.0	38.2	30.2	23.0	18.0	
105	69.0	65.0	60.0	47.0	37.6	29.6	22.6	17.4	
110	67.0	62.0	58.0	47.0	37.2	29.2	22.2	17.0	
115	64.0	60.0	56.0	46.0	36.6	28.6	21.6	16.6	
120		58.0	55.0	45.0	36.0	28.2	21.2	16.2	
125		57.0	53.0	45.0	35.6	27.6	20.8	15.8	
130		55.0	52.0	44.0	35.0	27.2	20.4	15.4	
135		50.0	43.6	34.4	26.6	20.0	15.0		
140		49.0	43.0	33.8	26.0	19.4	14.6		
145		48.0	42.4	33.4	25.2	19.0	14.2		
150		47.0	41.8	32.8	24.6	18.6	14.0		
155			41.2	32.4	24.0	18.2	13.6		
160			40.6	31.8	23.6	17.8	13.2		
165			40.2	31.2	23.0	17.4	12.8		
170			39.6	30.8	22.6	17.0	12.4		
175				30.2	22.2	16.6	12.2		
180				29.8	21.8	16.4	11.8		
185				29.2	21.4	16.0	11.4		
190					28.8	21.0	15.6	11.2	
195						20.6	15.2	10.8	
200						20.2	14.8	10.6	
205						19.8	14.4	10.2	
210							14.2	9.8	
215								13.8	9.6
220								13.6	9.2
225								13.2	9.0
230									8.8
235									8.4
240									8.2
Pounds (thousands)									
Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
45,0 m + 2,9 m (147.6 ft + 9.5 ft)									
55									
60	86.0								
65	83.0								
70	79.0	70.0							
75	75.0	67.0	57.0	45.0					
80	71.0	65.0	57.0	45.0	37.2				
85	68.0	62.0	57.0	45.0	37.2				
90	65.0	60.0	55.0	45.0	37.2	29.8	23.2		
95	62.0	58.0	54.0	45.0	37.0	29.8	23.2	18.0	
100	59.0	56.0	52.0	45.0	36.8	29.4	23.2	18.0	13.6
105		53.0	50.0	45.0	36.4	29.2	22.8	18.0	13.6
110		52.0	49.0	45.0	36.2	29.0	22.6	17.8	13.6
115		50.0	47.0	44.0	36.0	28.8	22.4	17.6	13.4
120		49.0	46.0	42.6	35.8	28.6	22.2	17.4	13.2
125		44.0	41.2	35.4	28.2	22.0	17.2	13.0	
130		43.0	40.0	35.2	28.0	21.6	16.8	12.8	
135		41.8	38.8	35.0	27.8	21.4	16.6	12.6	
140		40.4	37.6	34.6	27.6	21.2	16.4	12.2	
145		36.4	33.8	27.2	20.8	16.2	12.0		
150		35.4	33.2	27.0	20.6	15.8	11.8		
155		34.4	32.4	26.8	20.4	15.6	11.6		
160			31.8	26.4	20.0	15.4	11.4		
165			31.0	26.0	19.8	15.0	11.0		
170			30.2	25.6	19.6	14.8	10.8		
175			29.2	25.4	19.2	14.6	10.6		
180				25.0	19.0	14.4	10.4		
185				24.6	18.8	14.0	10.0		
190				24.4	18.4	13.8	9.8		
195				24.0	18.2	13.6	9.6		
200					18.0	13.2	9.4		
205						17.6	13.0	9.2	
210						17.4	12.8	9.0	
215						17.2	12.6	8.6	
220							12.2	8.4	
225							12.0	8.2	
230							11.8	8.0	
235							11.6	7.8	
240								7.6	
245									7.4

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Courtesy of Crane.Market

Load charts

Luffing jib

 81°
 49,8 m + 2,9 m
 (163.4 ft + 9.5 ft)

 25 m - 73 m
 (82 ft - 240 ft)

 120 000 kg
 (264,500 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
65									
70	67.0								
75	64.0	57.0							
80	62.0	57.0	45.0	37.0					
85	59.0	55.0	45.0	37.0					
90	57.0	53.0	45.0	37.0	29.2				
95	55.0	51.0	45.0	37.0	29.2	23.8	19.2		
100	53.0	50.0	45.0	37.0	29.2	23.8	19.2	14.6	
105		48.0	44.0	37.0	29.2	23.6	19.0	14.6	10.8
110		46.0	43.2	37.0	29.2	23.6	19.0	14.6	10.8
115		45.0	41.8	37.0	29.2	23.4	18.8	14.4	10.8
120		43.4	40.6	36.6	29.2	23.2	18.6	14.4	10.8
125			39.2	35.8	29.2	23.2	18.6	14.2	10.6
130			38.0	34.8	29.2	23.0	18.4	14.0	10.4
135			36.8	34.0	29.2	22.8	18.2	13.8	10.2
140			35.8	33.0	28.8	22.6	18.0	13.6	10.2
145				32.0	28.6	22.6	17.8	13.6	10.0
150				31.0	28.2	22.4	17.6	13.4	9.8
155				30.0	27.8	22.2	17.6	13.2	9.6
160				29.2	27.4	22.0	17.4	13.0	9.4
165					27.0	21.8	17.2	12.8	9.4
170					26.2	21.8	17.0	12.6	9.2
175					25.4	21.6	16.8	12.6	9.0
180					24.8	21.4	16.6	12.4	8.8
185						21.2	16.4	12.2	8.6
190						21.0	16.2	12.0	8.4
195						20.6	16.0	11.8	8.4
200						20.4	16.0	11.6	8.2
205							15.8	11.4	8.0
210							15.6	11.4	7.8
215							15.4	11.2	7.6
220							15.2	11.0	7.4
225								10.8	7.2
230								10.6	7.0
235								10.4	7.0
240								10.2	6.8
245									6.6
250									6.4
255									6.2

 81°
 54,6 m + 2,9 m
 (179.2 ft + 9.5 ft)

 25 m - 73 m
 (82 ft - 240 ft)

 120 000 kg
 (264,500 lb)

 29 ft 2 in spread
 (100%)


 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
70									
75	55.0								
80	55.0	45.0							
85	55.0	45.0							
90	53.0	45.0	36.6	29.8					
95	51.0	45.0	36.6	29.8	23.8				
100	49.0	45.0	36.6	29.8	23.8	19.6	15.2		
105	47.0	43.2	36.6	29.8	23.8	19.6	15.2	11.6	
110	45.0	41.8	36.6	29.8	23.8	19.4	15.2	11.6	
115		40.4	36.6	29.8	23.8	19.4	15.2	11.6	8.4
120		39.0	36.2	29.8	23.8	19.4	15.0	11.6	8.4
125		37.8	35.2	29.8	23.8	19.2	15.0	11.6	8.4
130		36.4	34.0	29.8	23.8	19.2	15.0	11.4	8.2
135			33.0	29.8	23.8	19.0	14.8	11.4	8.2
140			32.0	29.2	23.8	19.0	14.8	11.2	8.0
145			31.0	28.4	23.8	18.8	14.6	11.2	8.0
150			30.0	27.4	23.8	18.8	14.6	11.0	7.8
155				26.6	23.6	18.6	14.4	11.0	7.8
160				25.8	23.4	18.6	14.4	10.8	7.6
165				25.2	23.2	18.4	14.2	10.8	7.6
170				24.4	23.0	18.4	14.2	10.6	7.4
175					22.4	18.2	14.0	10.4	7.4
180					21.8	18.2	13.8	10.4	7.2
185					21.2	18.0	13.8	10.2	7.2
190					20.4	18.0	13.6	10.2	7.0
195					17.6	13.6	10.0	6.8	
200					17.2	13.4	10.0	6.8	
205					16.8	13.4	9.8	6.6	
210						13.2	9.6	6.6	
215						13.0	9.6	6.4	
220						13.0	9.4	6.2	
225							9.2	6.2	
230							9.2	6.0	
235							9.0	5.8	
240							8.8	5.8	
245								5.6	
250								5.6	
255								5.4	
260								5.2	

Working range

Luffing jib

82 ft - 240 ft luffing jib - 70° main boom

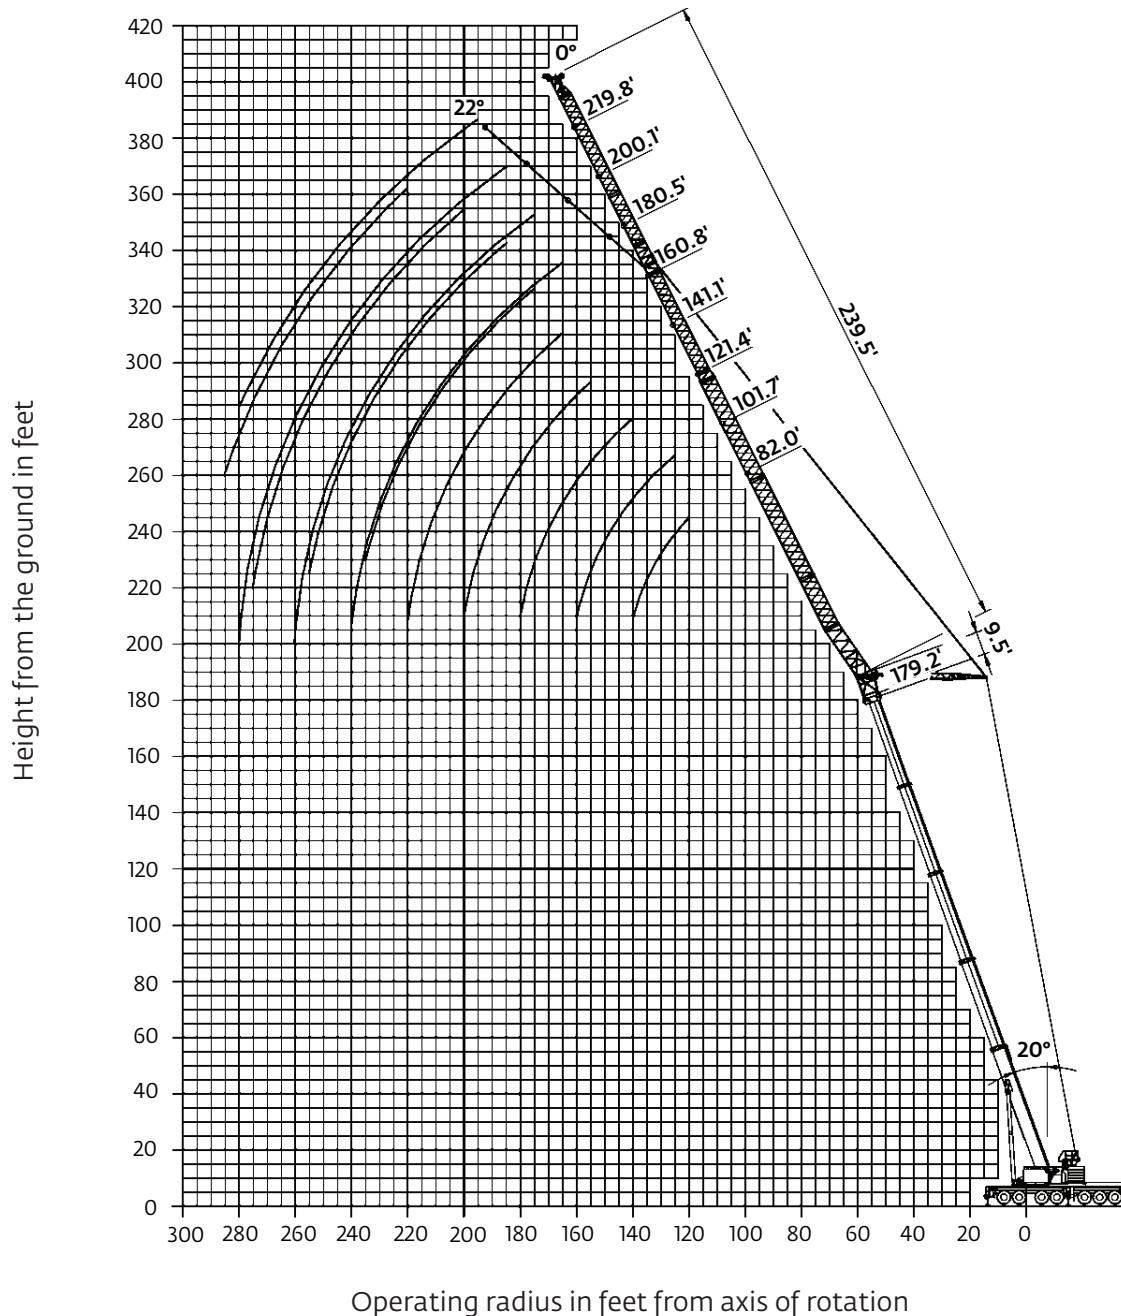

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load charts

Luffing jib

 70°
 25 m - 73 m
 120 000 kg (264,500 lb)
 29 ft 2 in spread (100%)
 360°
 16,0 m + 2,9 m
 (52.6 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
60	152.0								
65	142.0								
70	134.0								
75	128.0	125.0							
80	120.0	119.0							
85	112.0	112.0							
90	104.0	105.0	100.0						
95	98.0	97.0	81.0						
100	92.0	91.0	80.0	64.0					
105	86.0	85.0	79.0	62.0					
110	78.0	80.0	77.0	61.0					
115		76.0	75.0	59.0	46.0				
120		72.0	71.0	58.0	45.0	34.4			
125		68.0	67.0	57.0	43.6	33.4	25.4		
130		61.0	64.0	56.0	42.6	32.6	24.4		
135			61.0	54.0	41.6	31.8	23.4	17.6	
140			58.0	53.0	40.6	31.0	22.6	17.2	
145			55.0	51.0	39.6	30.2	22.0	16.6	
150			49.0	50.0	38.8	29.4	21.4	16.0	
155				48.0	38.0	28.8	20.8	15.6	
160				45.0	37.0	28.0	20.2	15.0	
165				43.2	36.2	27.2	19.8	14.6	
170				40.0	35.4	26.4	19.2	14.2	
175					34.6	25.6	18.8	13.6	
180					34.0	24.8	18.2	13.2	
185					33.0	24.0	17.8	12.8	
190					31.4	23.2	17.2	12.4	
195						22.6	16.8	12.0	
200						22.2	16.4	11.6	
205						21.6	16.0	11.2	
210							15.6	10.8	
215							15.0	10.6	
220							14.6	10.2	
225							14.4	9.8	
230								9.6	
235								9.2	
240								9.0	
245									8.6

 70°
 25 m - 73 m
 120 000 kg (264,500 lb)
 29 ft 2 in spread (100%)
 360°
 75,7 m + 2,9 m
 (84.3 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
70									
75	116.0								
80	110.0								
85	104.0								
90	97.0	96.0							
95	90.0	89.0	89.0						
100	85.0	84.0	83.0						
105		78.0	78.0	75.0					
110		74.0	73.0	72.0					
115		70.0	69.0	68.0	57.0				
120		66.0	65.0	64.0	56.0				
125		62.0	61.0	55.0	42.4				
130		59.0	58.0	54.0	41.6				
135		56.0	55.0	53.0	40.8	31.4			
140		53.0	52.0	52.0	39.8	30.8	22.8		
145		50.0	49.0	39.0	39.0	30.0	22.2	16.8	
150		48.0	47.0	38.2	29.4	21.6	16.2		
155		46.0	45.0	37.6	28.6	21.0	15.8		
160		43.6	43.2	36.8	28.0	20.4	15.4		
165		41.4	36.0	27.2	27.2	20.0	14.8		
170		39.6	35.2	26.4	19.4	14.4			
175		38.0	34.6	25.6	19.0	14.0			
180			36.4	33.8	24.8	18.6	13.6		
185				33.2	24.0	18.0	13.2		
190				32.6	23.6	17.6	12.8		
195				31.8	23.0	17.2	12.4		
200					30.4	22.4	16.6	12.0	
205						22.0	16.2	11.6	
210						21.6	15.8	11.2	
215						21.0	15.4	11.0	
220						20.6	15.0	10.6	
225							14.6	10.2	
230							14.4	10.0	
235							14.0	9.6	
240								9.4	
245								9.0	
250								8.8	
255								8.4	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load charts

Luffing jib

70°
 35,3 m + 2,9 m
 (115.9 ft + 9.5 ft)

25 m - 73 m
 (82 ft - 240 ft)

120 000 kg
 (264,500 lb)

29 ft 2 in spread
 (100%)

360°



Pounds (thousands)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
85									
90	72.0								
95	69.0								
100	66.0	63.0							
105	64.0	61.0	58.0						
110	61.0	58.0	55.0						
115	59.0	56.0	53.0						
120	54.0	52.0	49.0						
125	52.0	50.0	48.0						
130	51.0	48.0	46.0						
135	50.0	47.0	44.0	43.0					
140	46.0	43.0	41.6	36.8					
145	44.0	41.6	40.4	36.8	27.8				
150	42.8	40.4	39.0	35.8	27.4				
155	41.6	39.2	37.8	34.8	26.8	20.2			
160		38.0	36.8	34.0	26.2	19.6	14.8		
165		37.0	35.6	33.0	25.6	19.2	14.4		
170		36.0	34.6	32.0	25.0	18.8	14.0		
175		35.0	33.6	31.2	24.2	18.4	13.8		
180			32.8	30.2	23.6	18.0	13.4		
185			31.6	29.4	23.2	17.6	13.0		
190			30.4	28.6	22.8	17.2	12.6		
195			29.2	27.8	22.4	16.8	12.2		
200				27.0	22.0	16.4	12.0		
205				26.0	21.6	16.0	11.6		
210				25.0	21.0	15.8	11.2		
215				24.0	20.6	15.4	11.0		
220					20.2	15.0	10.6		
225					19.8	14.6	10.4		
230					19.6	14.2	10.0		
235					19.2	14.0	9.8		
240						13.6	9.4		
245						13.4	9.2		
250							8.8		
255							8.6		
260							8.4		
265							8.0		

70°
 45,0 m + 2,9 m
 (147.6 ft + 9.5 ft)

25 m - 73 m
 (82 ft - 240 ft)

120 000 kg
 (264,500 lb)

29 ft 2 in spread
 (100%)

360°



Pounds (thousands)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
95									
100	51.0								
105	51.0								
110	49.0								
115	46.0	42.0							
120	44.0	40.4							
125	42.0	39.0	36.8						
130	40.2	37.6	35.6						
135		36.4	34.4	32.0					
140		35.2	33.2	30.8					
145		34.0	32.0	29.8	28.8				
150		33.0	31.0	28.8	27.8				
155			30.0	27.8	26.8	24.6			
160			29.0	27.0	25.8	24.2	21.4		
165			28.2	26.0	25.0	23.4	21.2	16.4	
170			27.4	25.4	24.4	22.6	20.8	16.2	
175				24.8	23.8	21.8	20.2	16.0	11.8
180				24.0	23.0	21.0	19.6	15.8	11.8
185				23.4	22.4	20.4	19.0	15.6	11.4
190				22.8	21.6	19.6	18.4	15.2	11.2
195				21.0	19.0	17.8	17.8	15.0	11.0
200				20.4	18.4	17.2	17.2	14.8	10.8
205				19.8	17.8	16.6	16.6	14.6	10.6
210					17.2	16.0	14.2	10.2	
215					16.8	15.6	14.0	10.0	
220					16.2	15.0	13.6	9.8	
225					15.8	14.6	13.4	9.6	
230						14.0	13.0	9.4	
235						13.6	12.6	9.0	
240						13.2	12.2	8.8	
245						12.8	11.8	8.6	
250							11.4	8.4	
255							11.2	8.2	
260							10.8	8.0	
265								7.8	
270								7.6	
275								7.2	
280								7.0	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load charts

Luffing jib

 70°
 25 m - 73 m
 120 000 kg (264,500 lb)
 29 ft 2 in spread (100%)
 360°
 49,8 m + 2,9 m
 (163.4 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
110									
115	39.0								
120	37.6	35.2							
125	36.2	33.8							
130	35.0	32.6							
135	33.8	31.6	29.6						
140		30.4	28.6						
145		29.4	27.6	25.4					
150		28.4	26.6	24.6					
155		27.6	25.8	24.0					
160			25.0	23.2	23.0	19.4			
165			24.4	22.4	22.2	19.4	17.2		
170			23.6	21.6	21.4	18.6	17.2		
175			23.0	21.0	20.6	18.0	16.8	13.6	
180				20.2	20.0	17.4	16.2	13.4	
185				19.6	19.2	16.6	15.6	13.2	9.6
190				19.0	18.6	16.0	15.0	13.2	9.6
195				18.4	18.0	15.6	14.6	12.8	9.4
200					17.4	15.0	14.0	12.4	9.2
205					16.8	14.4	13.4	12.0	9.0
210					16.2	14.0	13.0	11.6	9.0
215					15.8	13.4	12.6	11.2	8.8
220					15.2	13.0	12.2	10.8	8.6
225					12.6	11.6	10.4	8.4	
230					12.0	11.2	10.0	8.2	
235					11.6	10.8	9.6	8.0	
240						10.4	9.4	7.8	
245						10.0	9.0	7.6	
250						9.8	8.6	7.2	
255						9.4	8.2	7.0	
260							8.0	6.8	
265							7.6	6.6	
270							7.4	6.2	
275							7.0	6.0	
280								5.8	
285									5.4

 70°
 25 m - 73 m
 120 000 kg (264,500 lb)
 29 ft 2 in spread (100%)
 360°
 54,6 m + 2,9 m
 (179.2 ft + 9.5 ft)


Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
115									
120	35.0								
125	33.6	29.8							
130	32.4	28.8							
135	31.2	27.6							
140	30.2	26.8	25.0						
145		25.8	24.4						
150		25.2	23.4						
155		24.4	22.6	20.6					
160		23.6	21.8	19.8					
165		21.2	19.2	18.2	15.4				
170		20.4	18.4	17.4	15.4				
175		19.8	17.8	16.8	14.8	12.8			
180		19.2	17.2	16.2	14.2	12.8			
185		16.6	15.6	13.8	12.4				
190		16.0	15.0	13.2	12.0	10.6			
195		15.6	14.6	12.6	11.4	10.2	7.6		
200		15.0	14.0	12.2	11.0	9.8			
205			13.6	11.6	10.6	9.4	7.4		
210			13.0	11.2	10.0	9.0	7.4		
215			12.6	10.8	9.6	8.6	7.2		
220			12.2	10.4	9.2	8.4	7.0		
225				10.0	9.0	8.0	6.6		
230				9.6	8.6	7.6	6.4		
235				9.2	8.2	7.2	6.0		
240				8.8	7.8	7.0	5.8		
245					7.4	6.6	5.4		
250					7.2	6.2	5.2		
255					6.8	6.0	4.8		
260					6.6	5.6	4.6		
265					5.4	4.4			
270					5.2	4.0			
275					4.8	3.8			
280					4.6	3.6			

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Working range

Luffing jib

82 ft - 240 ft luffing jib - 60° main boom

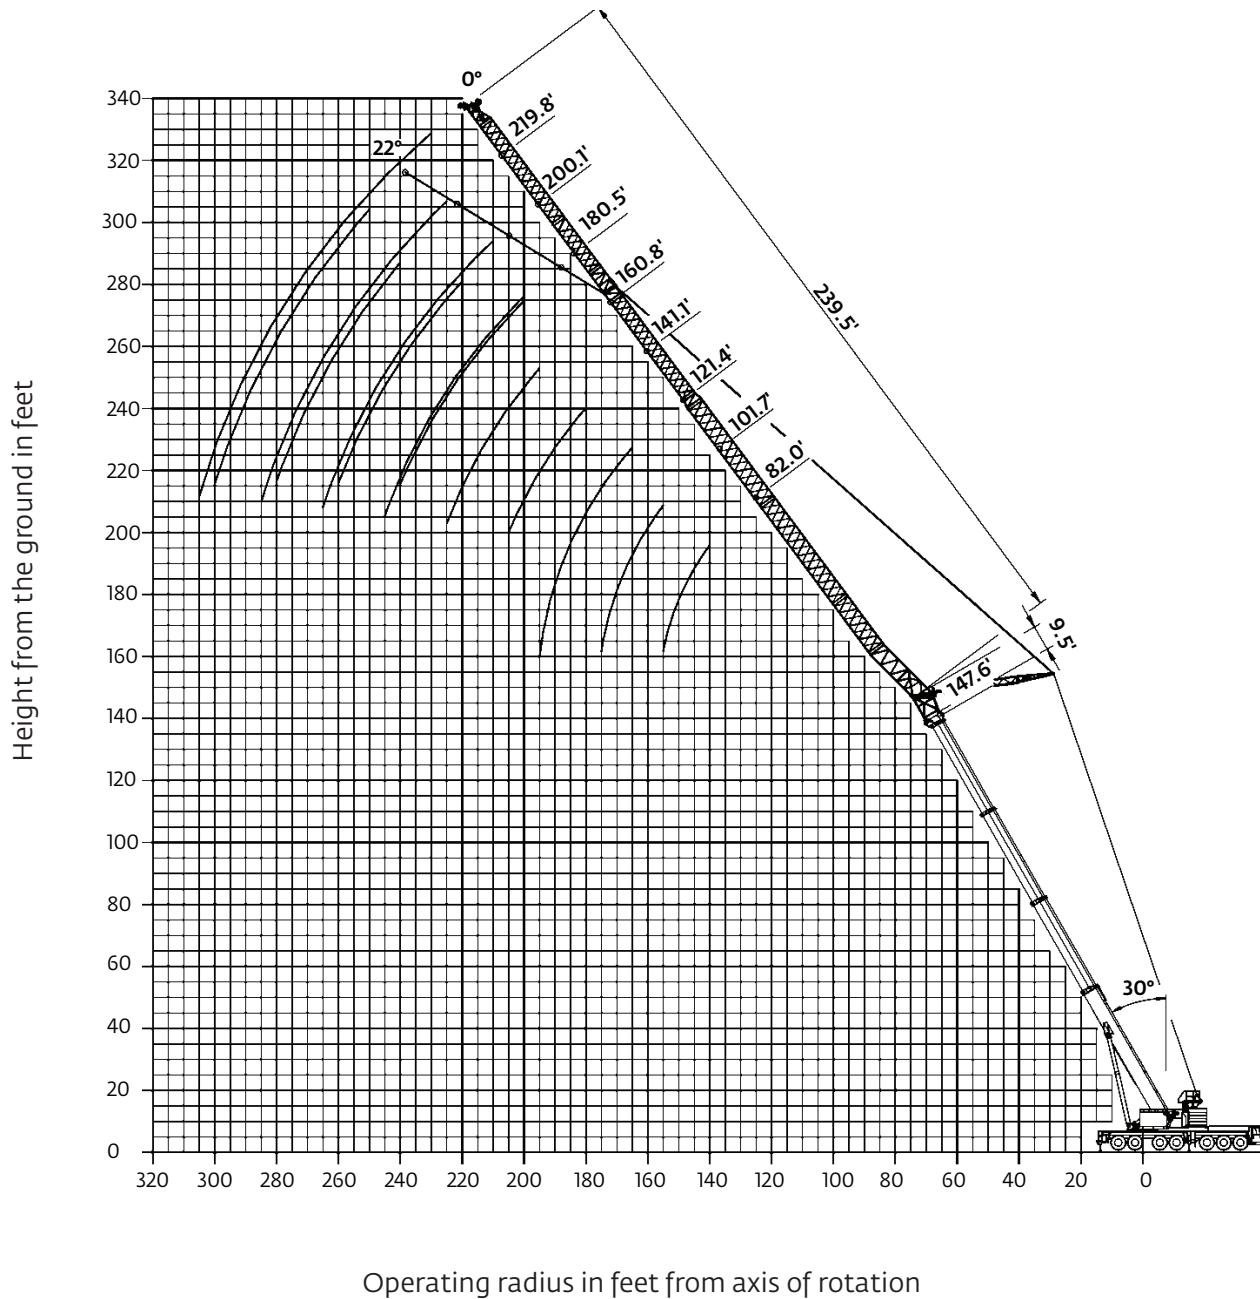

Operating radius in feet from axis of rotation


Hook heights shown in the working diagram do not consider loaded boom deflection.

Load charts

Luffing jib

 60°
 16,0 m + 2,9 m
 25 m - 73 m (82 ft - 240 ft)
 120 000 kg (264,500 lb)
 29 ft 2 in spread (100%)
 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
90	100.0								
95	94.0	93.0							
100	88.0	87.0							
105	82.0	81.0							
110	77.0	76.0							
115	73.0	72.0							
120	69.0	68.0	67.0						
125		64.0	63.0						
130		61.0	60.0						
135		58.0	57.0	57.0					
140		56.0	55.0	54.0					
145		52.0	52.0	41.6					
150		50.0	49.0	40.6					
155		48.0	47.0	39.6	30.2				
160		46.0	45.0	38.8	29.4				
165		43.2	37.8	28.6	20.8				
170		41.4	37.0	28.0	20.2				
175		39.8	36.2	27.2	19.6				
180		35.4	26.4	19.2	14.0				
185		34.6	25.4	18.6	13.6				
190		33.8	24.4	18.2	13.2				
195		33.2	23.8	17.6	12.8				
200			23.2	17.2	12.4				
205			22.6	16.8	12.0				
210			22.0	16.4	11.6				
215			21.6	15.8	11.2				
220				15.4	10.8				
225				15.0	10.6				
230				14.8	10.2				
235				14.4	9.8				
240					9.6				
245					9.2				
250					9.0				
255					8.6				

 60°
 25,7 m + 2,9 m (84.3 ft + 9.5 ft)
 25 m - 73 m (82 ft - 240 ft)
 120 000 kg (264,500 lb)
 29 ft 2 in spread (100%)
 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
95									
100	77.0								
105	72.0								
110	68.0								
115	64.0	63.0							
120		60.0							
125	57.0	56.0							
130	54.0	53.0							
135	51.0	50.0							
140		48.0	47.0						
145		46.0	44.0						
150		43.4	42.4						
155		41.6	40.4	39.6					
160			38.6	37.8	37.0				
165			37.0	36.2	35.4				
170			35.4	34.6	33.8				
175			34.0	33.2	32.4	28.0			
180				31.8	31.0	27.4			
185				30.6	29.8	26.8	19.4		
190				29.4	28.6	26.0	19.0		
195				28.2	27.4	25.4	18.4		
200				26.2	24.8	18.0	13.2		
205				25.2	23.8	17.6	12.8		
210				24.2	23.0	17.2	12.4		
215				23.4	22.4	16.6	12.0		
220					21.8	16.2	11.6		
225					21.0	15.8	11.2		
230					20.2	15.4	11.0		
235					19.4	15.0	10.6		
240						14.6	10.2		
245						14.4	10.0		
250						14.0	9.6		
255						13.6	9.2		
260							9.0		
265							8.8		
270							8.4		
275							8.2		

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Load charts

Luffing jib

 60°
 35,3 m + 2,9 m
 (115.9 ft + 9.5 ft)

 25 m - 73 m
 (82 ft - 240 ft)

 120 000 kg
 (264,500 lb)

 29 ft 2 in spread
 (100%)

 360°

	Pounds (thousands)								
Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
115									
120	51.0								
125	49.0								
130	47.0								
135	46.0	43.6							
140		42.2							
145		40.6	38.6						
150			38.8	37.4					
155				36.2					
160				34.4	33.2				
165					31.8				
170					31.6	30.4			
175					30.2	29.0	28.2		
180						27.8	27.0		
185						26.6	25.8	25.0	
190						25.6	24.8	23.8	
195						24.4	23.8	22.8	22.0
200							22.8	21.8	21.2
205							21.8	20.2	17.6
210							21.0	20.2	17.2
215							20.0	19.2	16.8
220								18.4	16.4
225								17.8	16.0
230								17.0	15.8
235								16.2	15.2
240									15.0
245									14.4
250									13.2
255									12.8
260									11.6
265									11.0
270									10.6
275									10.4
280									9.8
285									9.2

 60°
 45,0 m + 2,9 m
 (147.6 ft + 9.5 ft)

 25 m - 73 m
 (82 ft - 240 ft)

 120 000 kg
 (264,500 lb)

 29 ft 2 in spread
 (100%)

 360°

	Pounds (thousands)								
Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5
135									
140	33.4								
145	31.6								
150	30.0								
155	28.6	26.0							
160		25.2							
165		24.6	23.0						
170		23.8	22.2						
175		23.0	21.4						
180			20.8	18.8					
185			20.2	18.2					
190			19.6	17.6					
195			18.8	17.0	16.0				
200				16.4	15.4	13.6			
205					16.0	15.0	13.2		
210						14.4	12.6	15.2	
215						14.0	12.2	12.6	
220						13.4	11.6	10.6	
225						13.0	11.2	10.2	9.2
230							10.8	9.8	8.8
235							10.4	9.4	8.4
240							10.0	9.0	8.2
245							9.6	8.6	7.8
250								8.2	7.4
255								7.8	7.0
260								7.6	6.8
265								7.2	6.6
270									6.2
275									6.4
280									5.8
285									5.6
290									5.2
295									4.8
300									4.4
305									4.0

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load charts

Luffing jib

 60°
 49,8 m + 2,9 m
 (163.4 ft + 9.5 ft)

 25 m - 61 m
 (82 ft - 200 ft)

 120 000 kg
 264,500 lb

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1
140							
145	25.4						
150	24.8						
155	24.0						
160	23.2	21.2					
165		20.6					
170		19.8					
175		19.2	17.6				
180		18.6	17.0				
185			16.4	14.4			
190			15.8	14.0			
195			15.4	13.4			
200			14.8	13.0			
205				12.4	11.4		
210				12.0	11.0	9.2	
215				11.6	10.6	8.8	
220				11.2	10.2	8.4	7.6
225					9.8	8.0	7.2
230					9.4	7.6	6.8
235					9.0	7.2	6.4
240					8.6	6.8	6.0
245						6.6	5.8
250						6.2	5.4
255						6.0	5.2
260						5.6	4.8
265							4.6
270							4.2
275							4.0
280							3.8

 60°
 54,6 m + 2,9 m
 (179.2 ft + 9.5 ft)

 31 m - 49 m
 (102 ft - 161 ft)

 120 000 kg
 264,500 lb

 29 ft 2 in spread
 (100%)


 360°

Feet	101.7	121.4	141.1	160.8
170				
175		16.0		
180		15.4		
185		14.8	13.2	
190		14.4	12.8	
195		13.8	12.4	
200			11.8	10.0
205			11.4	9.6
210				9.2
215				8.8
220				8.4
225				8.0
230				7.4
235				7.0
240				6.6
245				6.4
				6.0
				5.8

Working range

Luffing jib with MegaWingLift™

82 ft - 259 ft luffing jib - 81° main boom with MegaWingLift

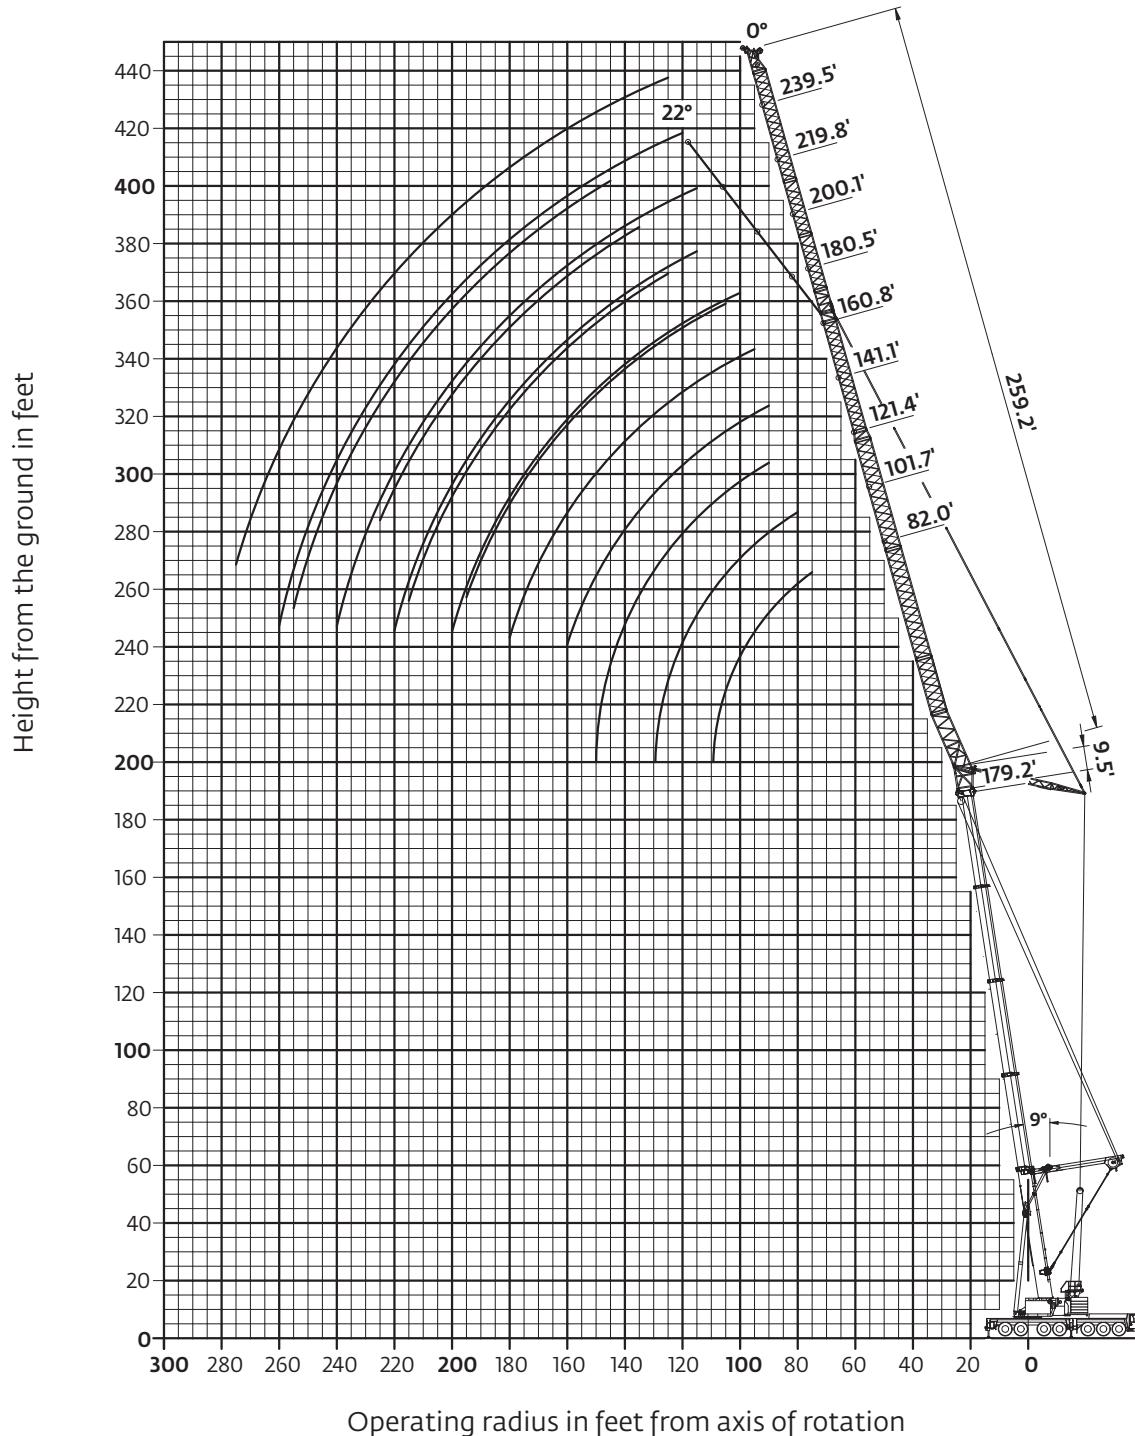

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load charts

Luffing jib with MegaWingLift™

 81°
 25 m - 79 m
 160 000 kg (352,700 lb)
 29 ft 2 in spread (100%)
 360°
 35,3 m + 2,9 m (115,9 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
50	141.0									
55	136.0	107.0								
60	129.0	107.0	85.0							
65	122.0	107.0	85.0							
70	115.0	107.0	85.0	69.0						
75	109.0	107.0	85.0	69.0	58.0					
80	105.0	107.0	85.0	69.0	58.0	48.0				
85	100.0	107.0	85.0	69.0	58.0	48.0				
90	97.0	105.0	85.0	69.0	58.0	48.0	39.6			
95		102.0	85.0	69.0	58.0	48.0	39.6	33.0		
100		98.0	85.0	69.0	58.0	48.0	39.6	33.0	26.2	
105		93.0	85.0	69.0	58.0	48.0	39.6	33.0	26.2	20.6
110		81.0	85.0	69.0	58.0	48.0	39.6	33.0	26.2	20.6
115			84.0	69.0	58.0	48.0	39.6	33.0	26.2	20.6
120			80.0	69.0	58.0	48.0	39.6	33.0	26.2	20.6
125			72.0	69.0	58.0	48.0	39.6	33.0	26.2	20.6
130			63.0	69.0	58.0	48.0	39.6	33.0	26.2	20.6
135			68.0	58.0	48.0	39.6	33.0	26.2	20.6	
140			63.0	58.0	47.0	39.6	33.0	25.8	20.6	
145			57.0	58.0	47.0	39.6	33.0	25.4	20.4	
150			50.0	57.0	46.0	39.6	33.0	24.8	20.0	
155				55.0	46.0	39.6	32.8	24.4	19.4	
160				51.0	46.0	39.6	32.2	23.8	19.0	
165				46.0	45.0	39.6	31.6	23.2	18.6	
170				40.8	45.0	39.6	30.6	22.8	18.2	
175				44.0	39.6	29.8	22.2	17.8		
180				41.4	39.6	29.0	21.8	17.2		
185				37.6	39.6	28.0	21.4	16.8		
190				33.2	39.6	27.2	20.8	16.4		
195					37.0	26.8	20.4	16.0		
200					34.0	26.2	19.8	15.6		
205					30.8	25.8	19.4	15.4		
210						25.4	19.0	15.0		
215						24.8	18.6	14.6		
220						24.6	18.4	14.2		
225							18.0	13.8		
230								17.6	13.6	
235								17.2	13.2	
240								17.0	13.0	
245									12.8	
250									12.4	
255									12.2	
260									12.0	

 81°
 25 m - 79 m
 160 000 kg (352,700 lb)
 29 ft 2 in spread (100%)
 360°
 45,0 m + 2,9 m (147,6 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
60	119.0									
65	113.0									
70	109.0	101.0								
75	106.0	98.0	81.0							
80	103.0	94.0	81.0	63.0						
85	102.0	91.0	81.0	63.0						
90	100.0	89.0	81.0	63.0	54.0					
95	98.0	87.0	79.0	63.0	54.0	44.0				
100	93.0	85.0	78.0	63.0	54.0	44.0	36.6	30.6		
105		84.0	76.0	63.0	54.0	44.0	36.6	30.6	24.4	
110		82.0	74.0	63.0	54.0	44.0	36.6	30.6	24.4	
115		78.0	72.0	63.0	54.0	44.0	36.6	30.6	24.4	19.0
120			71.0	63.0	54.0	44.0	36.6	30.6	24.4	19.0
125			70.0	63.0	54.0	44.0	36.6	30.6	24.4	19.0
130			68.0	62.0	54.0	44.0	36.6	30.6	24.4	19.0
135			64.0	61.0	54.0	44.0	36.6	30.6	24.4	19.0
140				60.0	54.0	44.0	36.6	30.6	24.4	19.0
145				58.0	54.0	44.0	36.6	30.6	24.4	19.0
150				55.0	54.0	44.0	36.6	30.6	24.4	19.0
155				52.0	54.0	44.0	36.6	30.6	24.2	19.0
160				52.0	43.8	36.6	30.6	23.8	19.0	
165				50.0	43.6	36.6	30.6	23.4	18.8	
170				48.0	43.2	36.6	30.6	23.0	18.4	
175				45.0	42.6	36.6	30.4	22.6	18.0	
180					42.2	36.6	29.6	22.0	17.6	
185					41.6	36.6	28.8	21.6	17.2	
190					41.0	36.6	28.0	21.2	16.8	
195					37.0	36.6	27.4	20.8	16.4	
200						36.6	26.6	20.4	16.0	
205							36.4	26.2	19.8	15.6
210							33.6	25.8	19.4	15.4
215							30.2	25.4	19.0	15.0
220								25.0	18.6	14.6
225								24.6	18.4	14.4
230									18.0	14.0
235									17.8	13.8
240									17.4	13.4
245									17.2	13.2
250									12.8	
255									12.6	
260									12.4	
265									12.2	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load charts

Luffing jib with MegaWingLift™

 81°
 49,8 m + 2,9 m
 (163.4 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
70	98.0									
75	95.0	85.0								
80	93.0	83.0	74.0							
85	91.0	81.0	73.0							
90	89.0	79.0	72.0	60.0						
95	86.0	78.0	70.0	60.0	50.0	41.2				
100	81.0	76.0	68.0	60.0	50.0	41.2				
105		74.0	67.0	60.0	50.0	41.2	34.2	28.6		
110		71.0	66.0	59.0	50.0	41.2	34.2	28.6		
115		68.0	64.0	58.0	50.0	41.2	34.2	28.6	22.6	
120		65.0	63.0	57.0	50.0	41.2	34.2	28.6	22.6	17.2
125			60.0	55.0	50.0	41.2	34.2	28.6	22.6	17.2
130			58.0	54.0	50.0	41.2	34.2	28.6	22.6	17.2
135			55.0	52.0	50.0	41.2	34.2	28.6	22.6	17.2
140			53.0	50.0	50.0	41.2	34.2	28.6	22.6	17.2
145				48.0	48.0	41.2	34.2	28.6	22.6	17.2
150				47.0	47.0	41.2	34.2	28.6	22.6	17.2
155					45.0	46.0	41.2	34.2	28.6	22.6
160					43.0	44.0	40.6	34.2	28.6	22.6
165						43.0	39.8	34.2	28.6	22.6
170						41.6	39.2	34.2	28.6	22.6
175						40.2	38.4	34.2	28.6	22.4
180						38.8	37.2	34.2	28.6	22.0
185							36.2	34.2	28.4	21.6
190							35.0	33.8	28.0	21.2
195							34.0	32.8	27.4	20.8
200								32.0	26.8	20.4
205								31.0	25.2	20.0
210								29.8	25.8	19.6
215									28.4	19.2
220									27.0	19.2
225										18.4
230										14.0
235										13.8
240										13.4
245										13.2
250										13.0
255										12.6
260										12.4
265										12.2

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
75	85.0									
80	80.0	75.0								
85	76.0	71.0								
90	73.0	68.0	64.0	55.0						
95	69.0	65.0	61.0	54.0	47.0					
100	66.0	62.0	59.0	53.0	47.0	38.0				
105	63.0	60.0	56.0	51.0	47.0	38.0				
110	60.0	57.0	53.0	50.0	47.0	38.0				
115	54.0	51.0	48.0	46.0	38.0	31.6	25.2			
120	51.0	49.0	47.0	45.0	38.0	31.6	25.2	20.8		
125	49.0	47.0	45.0	45.0	38.0	31.6	25.2	20.8	15.8	
130	46.0	45.0	43.0	43.4	38.0	31.6	25.2	20.8	15.8	
135		43.2	41.4	42.0	38.0	31.6	25.2	20.8	15.8	
140		41.4	39.8	40.6	37.4	31.6	25.2	20.8	15.8	
145		39.6	38.2	39.2	36.4	31.6	25.2	20.8	15.8	
150		37.8	36.6	38.0	35.4	31.6	25.2	20.8	15.8	
155			35.2	36.8	34.6	31.6	25.2	20.8	15.8	
160			33.8	35.4	33.4	31.2	25.2	20.8	15.8	
165				34.2	31.8	30.6	25.2	20.8	15.8	
170				33.0	30.4	30.0	25.2	20.8	15.8	
175				31.8	29.0	28.8	25.2	20.8	15.8	
180				30.6	27.4	27.6	25.0	20.8	15.8	
185					26.6	26.4	24.4	20.8	15.8	
190					25.6	25.2	23.8	20.8	15.8	
195					24.6	24.0	23.0	20.6	15.8	
200					23.8	23.2	22.4	20.2	15.8	
205						22.4	21.8	19.8	15.8	
210						21.6	21.0	19.4	15.4	
215						20.8	20.4	19.0	15.2	
220						20.0	19.8	18.6	14.8	
225							19.0	18.2	14.6	
230							18.4	17.6	14.2	
235							17.8	17.0	14.0	
240							17.0	16.6	13.6	
245								16.0	13.4	
250								15.4	13.2	
255								14.8	12.8	
260								14.2	12.6	
265								12.4		
270								12.0		
275								11.8		

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.


The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Courtesy of Crane.Market

Working range

Luffing jib with MegaWingLift™

82 ft - 259 ft luffing jib - 70° main boom with MegaWingLift

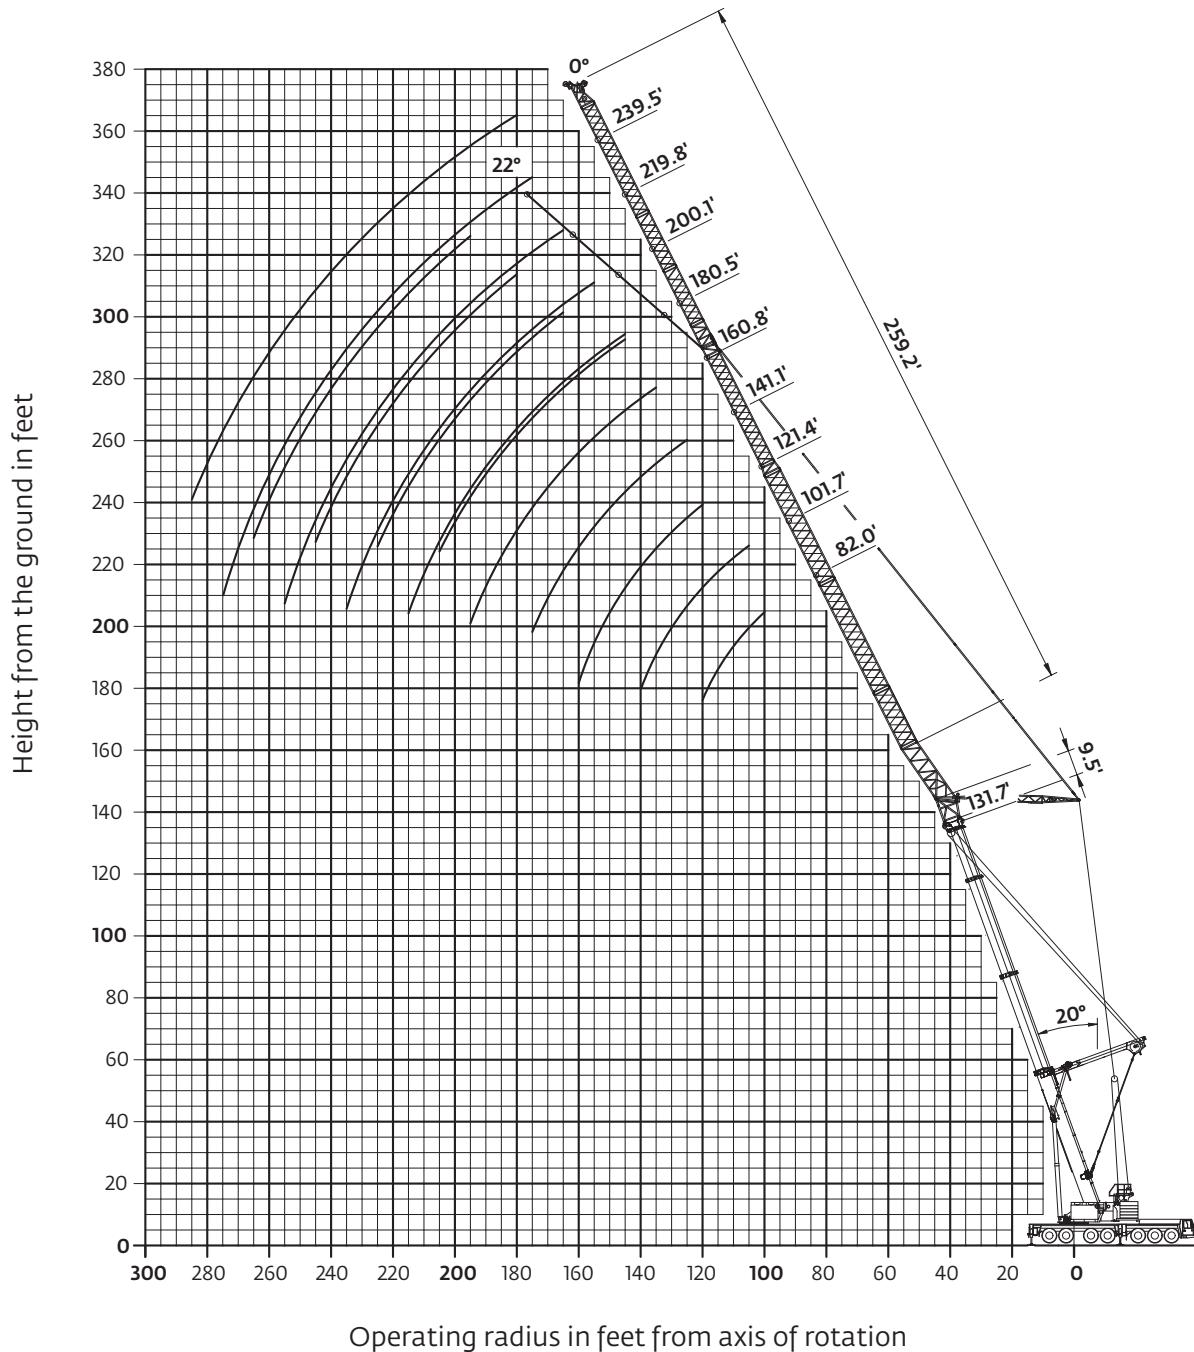

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load charts

Luffing jib with MegaWingLift™

 70°
 34,3 m + 2,9 m
 (115.9 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
95	98.0									
100	93.0	91.0								
105	88.0	87.0								
110	84.0	83.0								
115	80.0	79.0	78.0							
120		75.0	74.0	71.0						
125		72.0	71.0	70.0	60.0					
130		68.0	68.0	67.0	60.0					
135		66.0	65.0	64.0	59.0					
140			62.0	61.0	59.0	48.0				
145			60.0	59.0	58.0	47.0	40.4			
150			58.0	57.0	56.0	47.0	40.4			
155			55.0	54.0	54.0	47.0	40.4			
160			52.0	52.0	47.0	40.4	33.4			
165			50.0	50.0	46.0	40.4	33.2	25.2		
170			49.0	48.0	46.0	40.4	32.8	24.8		
175			46.0	45.0	40.4	32.4	24.4	18.8		
180			45.0	43.6	40.4	32.0	23.8	18.8		
185			43.2	42.2	40.4	31.6	23.4	18.8		
190			41.6	40.8	39.8	31.2	23.0	18.4		
195				39.2	38.4	30.8	22.4	18.0		
200				37.8	37.0	29.8	22.0	17.6		
205				36.6	35.8	29.0	21.4	17.2		
210					34.6	28.0	21.0	16.6		
215					33.4	27.2	20.6	16.2		
220					32.2	26.6	20.2	15.8		
225					31.2	26.0	19.8	15.4		
230						25.6	19.2	15.2		
235						25.2	18.8	14.8		
240						24.8	18.4	14.4		
245						24.4	18.0	14.0		
250							17.8	13.8		
255							17.4	13.4		
260							17.2	13.2		
265							16.8	12.8		
270								12.6		
275								12.4		
280								12.2		

 70°
 45,0 m + 2,9 m
 (147.6 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
105	83.0									
110	79.0									
115	75.0	71.0								
120	72.0	69.0								
125	68.0	68.0	62.0							
130	65.0	65.0	61.0							
135	62.0	59.0	54.0							
140	59.0	58.0	53.0	51.0						
145	57.0	56.0	53.0	50.0						
150	55.0	54.0	53.0	49.0						
155	52.0	51.0	48.0	39.6						
160	50.0	49.0	47.0	39.6	37.0					
165	48.0	47.0	46.0	39.6	37.0					
170	46.0	45.0	44.0	39.6	37.0					
175	43.8	42.8	39.6	37.0	31.2					
180	42.2	41.2	39.6	36.6	31.2	24.0				
185		39.8	38.4	36.2	31.0	23.6				
190		38.4	37.0	35.6	34.8	30.6	23.0	17.4		
195		37.0	35.6	34.8	33.4	30.4	22.6	17.4		
200		35.6	34.4	33.4	32.2	30.0	22.2	17.4		
205		34.4	33.0	32.2	30.0	29.8	21.8	17.4		
210		32.0	31.2	29.8	28.0	27.4	20.6	16.2		
215		30.8	30.0	29.0	28.2	28.0	21.0	16.6		
220			29.8	29.0	28.2	27.4	20.6	16.2		
225				28.0	27.4	26.4	20.2	15.8		
230				27.0	26.4	25.4	19.8	15.4		
235				26.0	25.4	24.6	19.4	15.2		
240				25.2	24.2	23.8	19.0	14.8		
245				24.2	24.2	23.8	19.0	14.8		
250					23.0	22.2	18.6	14.6		
255					22.2	22.2	18.2	14.2		
260						21.4	18.0	14.0		
265							17.6	13.6		
270							17.4	13.4		
275							17.0	13.2		
280							16.8	12.8		
285								12.6		
290								12.4		
295								12.0		

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Courtesy of Crane.Market

Load charts

Luffing jib with MegaWingLift™

 70°
 49,8 m + 2,9 m
 (163.4 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

	Pounds (thousands)									
FEET	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
115	72.0									
120	70.0	62.0								
125	67.0	60.0								
130	64.0	59.0								
135	61.0	58.0	52.0							
140	56.0	51.0	46.0							
145	55.0	50.0	46.0							
150	52.0	49.0	45.0							
155	50.0	48.0	44.0	42.2						
160	47.0	43.2	41.6	35.2						
165	45.0	42.2	40.8	35.2						
170	43.6	41.2	40.8	35.2						
175	42.0	39.8	39.6	35.2	32.0					
180		38.4	39.0	35.0	31.6	28.4				
185			37.2	38.0	34.6	31.2	28.2			
190			35.8	36.6	34.0	30.6	27.8			
195				35.4	33.6	30.4	27.4	22.4		
200				34.0	32.8	30.0	27.0	22.2		
205				32.8	31.6	29.6	26.6	22.0	16.8	
210				31.6	30.4	29.2	26.4	21.6	16.8	
215				30.6	29.4	28.4	26.0	21.4	16.8	
220					28.4	27.4	25.6	21.0	16.8	
225					27.4	26.4	25.0	20.8	16.4	
230						25.4	24.4	20.4	16.0	
235						24.6	23.8	20.0	15.8	
240						23.8	23.2	19.6	15.4	
245						22.8	22.4	19.2	15.0	
250						22.0	21.6	19.0	14.8	
255						21.2	20.8	18.6	14.4	
260							20.0	18.2	14.2	
265							19.4	18.0	13.8	
270								17.6	13.6	
275								17.4	13.4	
280								17.0	13.0	
285								16.4	12.8	
290									12.6	
295									12.2	
300									12.0	

 70°
 54,6 m + 2,9 m
 (179.2 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

	Pounds (thousands)									
FEET	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
120	57.0									
125	53.0	49.0								
130	51.0	47.0								
135	49.0	46.0								
140	47.0	43.8	41.4							
145		42.2	39.8	37.2						
150		40.6	38.4	36.0						
155		39.0	37.0	34.6						
160		37.4	35.6	33.4	34.6					
165			34.4	32.2	33.6					
170			33.0	31.0	32.6					
175			31.8	29.6	31.4	28.0				
180			30.6	28.0	29.6	26.6	25.2			
185				26.2	27.8	25.8	24.4	23.0		
190				25.0	26.6	25.0	23.8	22.4		
195				24.0	25.8	24.2	23.0	21.8		
200					25.0	23.4	22.4	21.2	19.6	
205					24.2	22.8	21.6	20.6	19.2	
210					23.4	22.0	21.0	20.0	18.6	15.2
215					22.6	21.4	20.4	19.4	18.2	15.2
220					21.8	20.6	19.8	18.8	17.6	15.2
225						20.0	19.2	18.2	17.2	15.2
230						19.2	18.6	17.6	16.6	15.0
235						18.6	18.0	17.2	16.2	14.6
240							17.4	16.6	15.6	14.2
245							16.8	16.2	15.2	13.6
250							16.2	15.6	14.6	13.2
255							15.6	15.2	14.2	12.8
260							15.0	14.6	13.8	12.4
265								14.2	13.2	12.0
270								13.6	12.8	11.6
275								13.2	12.4	11.2
280								12.0	10.8	
285								11.6	10.6	
290								11.2	10.2	
295								10.8	9.8	
300									9.4	
305									9.0	
310									8.6	


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Luffing jib with MegaWingLift™

82 ft - 259 ft luffing jib - 60° main boom with MegaWingLift

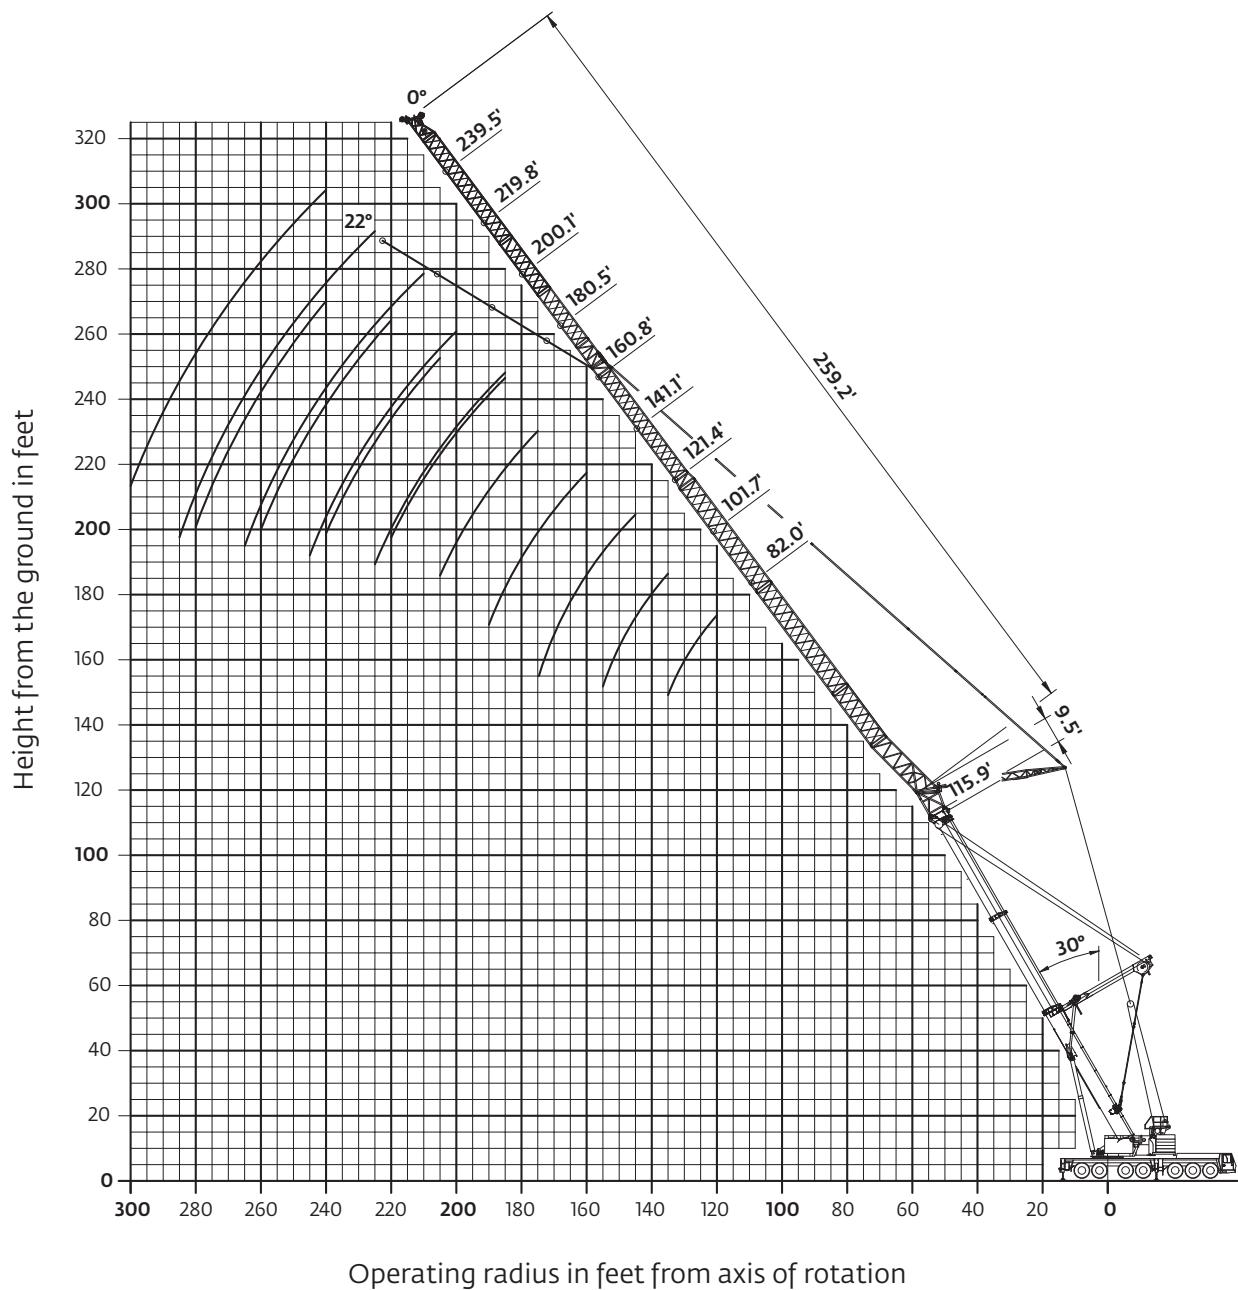

Load charts

Luffing jib with MegaWingLift™

 60°
 35.3 m + 2.9 m
 (115.9 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
120	68.0									
125	65.0									
130	62.0									
135	60.0	58.0								
140	56.0									
145	54.0	53.0								
150	52.0	51.0								
155	50.0	49.0								
160	47.0	45.0								
165	45.0	43.6								
170	43.4	42.0								
175	41.6	40.4	39.4							
180		38.8	37.8							
185		37.4	36.4	35.0						
190		36.0	35.0	33.6						
195			33.8	32.4						
200			32.6	31.2	30.2					
205			31.4	30.0	29.0					
210				29.0	28.0	27.2				
215				27.8	27.0	26.2				
220				26.8	26.0	25.4				
225				26.0	25.0	24.4	21.4			
230					24.2	23.6	20.8			
235					23.4	22.6	20.4			
240					22.4	21.8	20.0	15.4		
245					21.6	21.0	19.6	15.4		
250						20.4	19.2	15.0		
255						19.6	18.8	14.6		
260						19.0	18.4	14.2		
265						18.2	17.8	14.0		
270							17.2	13.6		
275							16.6	13.4		
280							16.0	13.0		
285							15.4	12.8		
290								12.6		
295								12.4		
300								12.0		

 60°
 45.0 m + 2.9 m
 (147.6 ft + 9.5 ft)

 25 m - 79 m
 (82 ft - 259 ft)

 160 000 kg
 (352,700 lb)

 29 ft 2 in spread
 (100%)

 360°

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
140	52.0									
145	50.0									
150	48.0									
155	46.0	44.0								
160		42.6								
165	40.8	39.6								
170	39.2	38.2								
175	37.6	36.6	35.0							
180		35.2	33.6							
185		34.0	32.4							
190		32.6	31.2							
195		31.4	30.0	29.0						
200			28.8	27.8						
205			27.8	26.8	25.6					
210				25.8	24.8					
215				24.8	23.8					
220				24.0	22.8	22.0				
225				23.0	22.0	21.0				
230					21.2	20.2	19.6			
235					20.4	19.6	18.8			
240					19.6	18.8	18.2	17.2		
245					18.8	18.0	17.4	16.6		
250						17.4	16.8	15.8	14.4	
255						16.6	16.2	15.2	14.2	
260						16.0	15.4	14.6	13.6	
265						15.4	14.8	14.0	13.0	
270						14.2	13.4	12.4		
275						13.8	12.8	11.8		
280						13.2	12.4	11.4		
285						12.6	11.8	10.8		
290							11.4	10.4		
295							10.8	9.8		
300							10.4	9.4		
305								9.0		
310								8.6		
315								8.0		
320								7.6		

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Load charts

Luffing jib with MegaWingLift™

 60°
 25 m - 79 m
 160 000 kg
 29 ft 2 in spread
 360°
 49,8 m + 2,9 m
 (82 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
145	47.0									
150	45.0									
155	43.6									
160	41.8	40.4								
165		38.8								
170		37.2								
175		35.6	34.6							
180		34.2	33.2							
185			32.0	30.2						
190			30.8	29.2						
195			29.6	28.0						
200			28.4	27.0	26.4					
205				26.0	25.4					
210				25.0	24.4	22.8				
215				24.0	23.6	22.0				
220				23.0	22.6	21.2				
225					21.8	20.2	19.2			
230					21.0	19.6	18.6			
235					20.2	18.8	17.8			
240					19.4	18.0	17.0	16.2		
245						17.4	16.4	15.6		
250						16.6	15.8	15.0	13.8	
255						16.0	15.2	14.4	13.2	
260						14.6	13.8	12.6		
265						14.0	13.2	12.2	10.6	
270							13.4	12.6	11.6	10.6
275							12.8	12.2	11.0	10.0
280							12.2	11.6	10.6	9.6
285								11.0	10.2	9.0
290								10.6	9.6	8.6
295									10.2	8.2
300										8.8
305										8.2
310										7.8
315										6.8
320										6.4
325										6.2
330										5.8
335										5.4

 60°
 25 m - 79 m
 160 000 kg
 29 ft 2 in spread
 360°
 54,6 m + 2,9 m
 (179.2 ft + 9.5 ft)

Feet	82.0	101.7	121.4	141.1	160.8	180.5	200.1	219.8	239.5	259.2
160	39.6									
165	38.0									
170	36.4									
175	34.8	33.4								
180		32.2								
185		31.0	29.0							
190		29.8	27.8							
195			25.8	23.2						
200			24.6	22.4						
205			23.6	21.6						
210				21.0	22.6					
215				20.2	21.8					
220				19.4	20.8					
225				18.8	20.0	18.6				
230					19.4	17.8				
235					18.6	17.0				
240					17.8	16.4	15.4			
245					17.2	15.8	14.6			
250					15.0	14.0	13.2			
255					14.4	13.4	12.6			
260					13.8	12.8	12.0	10.8		
265					13.2	12.4	11.6	10.2		
270						11.8	11.0	9.8	7.8	
275						11.2	10.6	9.2	7.8	
280						10.8	10.0	8.8	7.6	
285						10.2	9.6	8.4	7.2	
290							9.2	8.0	6.8	
295								8.6	7.6	6.4
300								8.2	7.0	6.0
305								7.8	6.6	5.6
310									6.2	5.2
315									6.0	4.8
320									5.6	4.6
325										4.2
330										3.8
335										3.6
340										3.2


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Lattice extension

39 ft - 230 ft boom extension

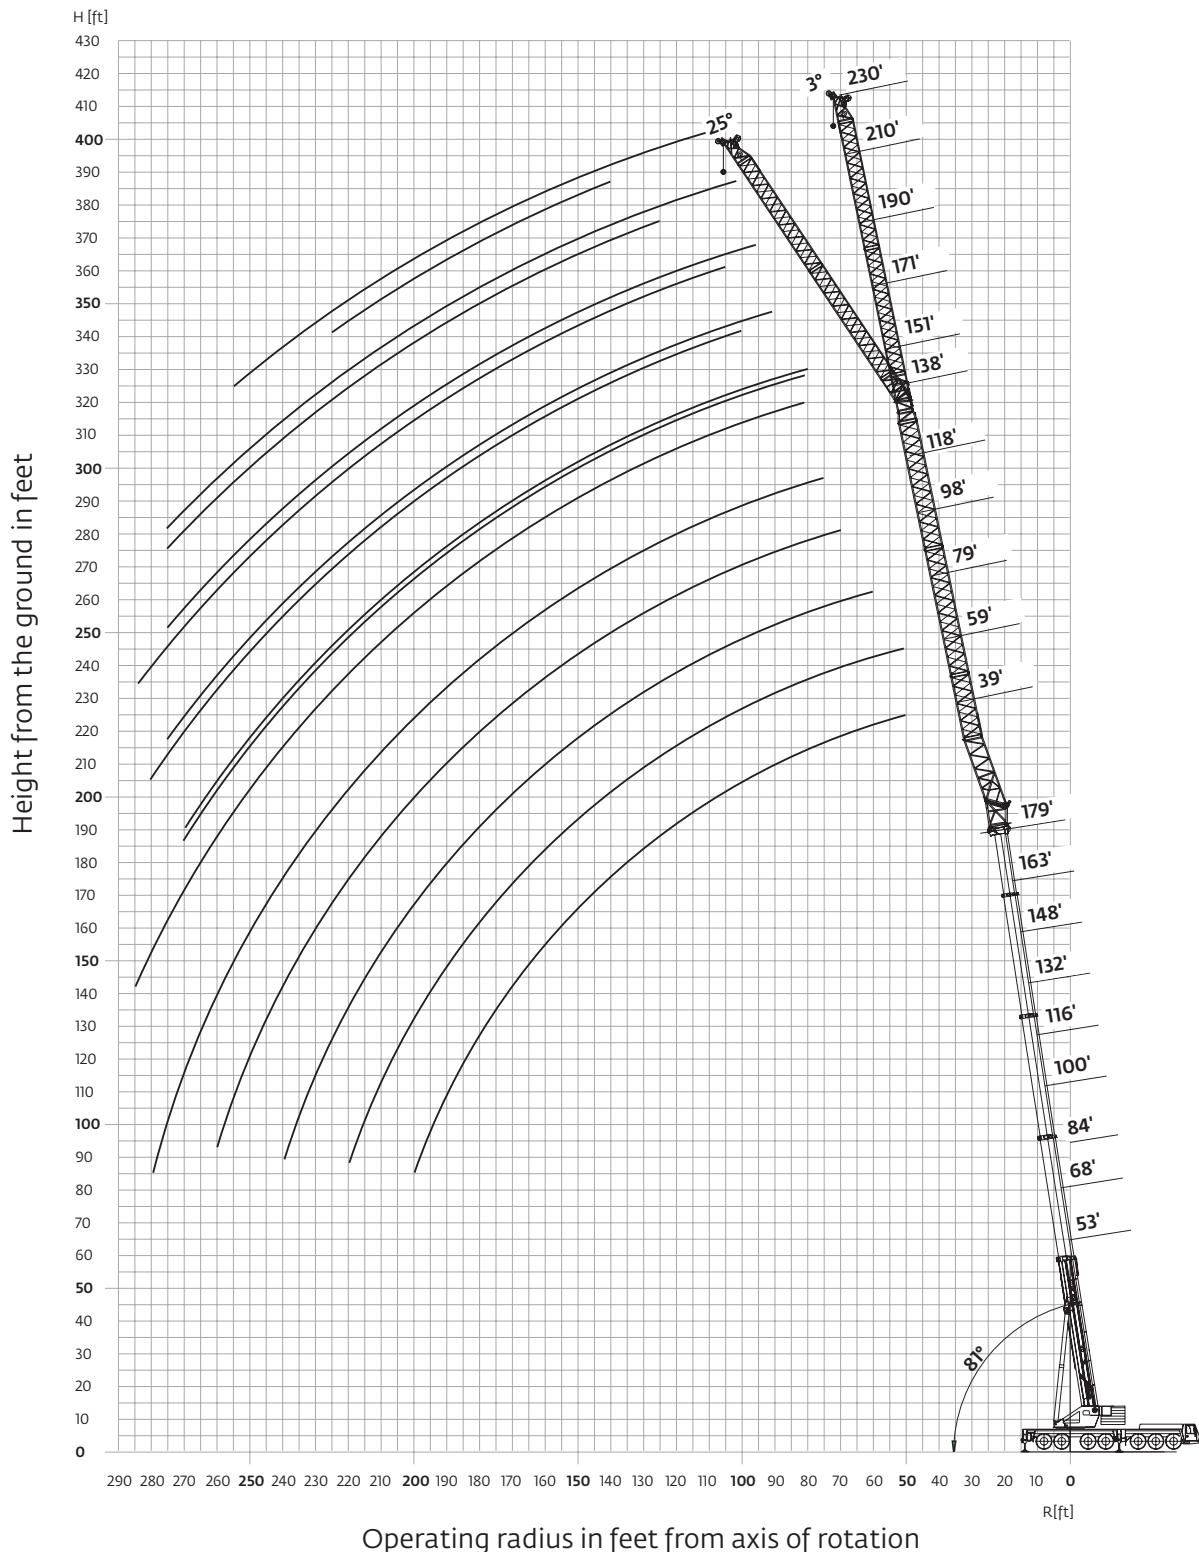

Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Lattice extension



49.8 m
(163.4 ft)



12 m - 70 m
(39 ft - 230 ft)



120 000 kg
(264,500 lb)



29 ft 2 in spread
(100%)



360°



Pounds (thousands)

Feet	163.4											
Feet	39.4	59.1	78.7	98.4	118.1	137.8	150.9	170.6	190.3	210.0	229.7	
	3°	3°	3°	3°	3°	3°	3° 25°	3° 25°	3° 25°	3° 25°	3° 25°	
45	105.0											
50	100.0	87.0										
55	96.0	83.0	66.0									
60	90.0	80.0	63.0	51.0								
65	85.0	77.0	61.0	49.0								
70	79.0	72.0	58.0	47.0	41.6							
75	74.0	68.0	56.0	45.0	40.0	33.8	28.2					
80	70.0	64.0	53.0	43.6	38.6	32.6	27.0	25.6	23.4			
85	66.0	61.0	51.0	42.0	37.2	31.4	26.0	24.4	22.6			
90	62.0	57.0	50.0	40.4	35.8	29.8	24.8	23.6	21.6	19.0		
95	58.0	54.0	48.0	39.0	34.4	28.4	23.8	22.6	20.8	18.6	18.2	
100	54.0	51.0	46.0	37.8	33.4	26.8	23.0	21.8	19.8	17.8	17.4	
105	52.0	49.0	45.0	36.6	32.2	25.8	22.0	21.0	19.2	17.2	16.8	
110	49.0	46.0	43.0	35.2	31.2	25.0	21.2	20.2	18.4	16.4	16.0	
115	46.0	44.0	41.4	34.0	30.0	24.2	20.4	19.4	17.6	15.8	15.4	
120	43.6	41.8	39.6	32.8	28.8	23.4	19.6	18.8	17.0	15.2	14.8	
125	41.0	39.8	37.8	31.6	27.6	22.4	18.8	18.0	16.2	14.6	14.2	
130	38.6	38.0	36.0	30.4	26.4	21.8	18.2	17.4	15.6	14.2	13.6	
135	36.6	36.0	34.2	29.2	25.2	21.2	17.6	16.8	15.0	13.6	13.2	
140	34.6	34.2	32.6	28.0	24.2	20.4	17.0	16.2	14.4	13.2	12.8	
145	32.6	32.4	30.8	26.8	23.6	19.8	16.4	15.6	14.0	12.6	12.0	
150	30.6	30.6	29.0	25.8	23.0	19.2	15.8	15.2	13.4	12.2	11.6	
155	28.6	29.0	27.4	25.0	22.4	18.6	15.2	14.6	13.0	11.8	11.0	
160	26.6	27.4	25.6	24.0	21.6	18.2	14.8	14.0	12.4	11.4	10.6	
165	25.0	26.0	24.4	23.2	21.0	17.6	14.2	13.6	12.0	11.0	10.2	
170	23.0	24.4	23.4	22.2	20.4	17.2	13.8	13.2	11.6	10.6	9.8	
175	21.2	22.8	22.4	21.2	19.8	16.6	13.4	12.8	11.2	10.2	9.4	
180	19.4	21.2	21.4	20.4	19.2	16.2	12.8	12.4	10.8	9.8	9.0	
185	17.8	19.6	20.2	19.6	18.4	15.8	12.4	12.0	10.4	9.6	8.6	
190	16.4	18.0	19.2	18.6	17.8	15.4	12.0	11.6	10.0	9.2	8.4	
195	16.4	18.2	17.8	17.2	15.0	11.6	11.2	9.6	8.8	8.0	7.8	
200	15.0	16.8	17.0	16.6	14.6	11.4	11.0	9.2	8.6	7.8	6.8	
205		13.8	15.4	16.0	15.8	14.2	11.0	10.6	9.0	8.2	7.4	
210		14.2	15.2	15.0	13.8	10.6	10.2	8.6	8.0	7.2	6.2	
215		12.8	13.8	14.4	13.4	10.2	10.0	8.4	7.8	6.8	6.0	
220		11.8	12.6	13.6	12.8	10.0	9.6	8.0	7.4	6.6	5.8	
225		10.6	11.6	12.4	12.2	9.6	9.2	7.8	7.2	6.2	5.6	
230		10.4	11.4	11.6	9.0	8.8	7.4	7.0	6.0	5.4	4.6	
235		9.4	10.4	10.6	8.6	8.4	7.2	6.8	5.8	5.2	4.2	
240		8.4	9.4	9.6	7.6	8.0	6.8	6.4	5.6	5.0	4.0	
245		8.4	8.6	8.6	6.8	7.2	6.6	6.2	5.4	4.8	3.8	
250		7.4	7.8	5.8	6.2	6.2	6.0	5.2	4.6	3.6	3.0	
255		6.6	7.0	5.0	5.2	5.6	5.8	4.8	4.4	3.4	2.8	
260		5.8	6.0	4.0	4.4	4.8	5.4	4.6	4.2	3.4	2.6	
265		5.2	3.2	3.6	4.0	4.8	4.4	3.8	3.2	2.6		
270		4.4	2.6	2.8	3.2	4.0	3.8	3.6	3.0			
275		3.8			2.4	3.2	3.0	3.4	2.8			
280		3.0				2.4	2.2	3.2	2.4			
285								2.6				

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

Lattice extension




54,6 m
(179.2 ft)



12 m - 70 m
(39 ft - 230 ft)



120 000 kg
(264,500 lb)



29 ft 2 in spread
(100%)



360°



Pounds (thousands)

Feet	179.2											
Feet	39.4	59.1	78.7	98.4	118.1	137.8	150.9	170.6	190.3	210.0	229.7	
	3°	3°	3°	3°	3°	3°	3° 25°	3° 25°	3° 25°	3° 25°	3° 25°	
45												
50	87.0	78.0										
55	83.0	75.0										
60	80.0	72.0	60.0									
65	76.0	68.0	58.0									
70	72.0	65.0	56.0	47.0								
75	68.0	61.0	54.0	46.0	38.6							
80	65.0	58.0	52.0	44.0	37.4	31.4	25.8	24.6				
85	61.0	55.0	49.0	43.0	36.2	29.8	25.0	23.8				
90	57.0	52.0	47.0	41.6	35.0	28.2	24.2	22.8	20.8			
95	54.0	50.0	45.0	40.2	34.0	27.0	23.2	22.0	20.0	17.2		
100	51.0	47.0	43.4	38.8	32.8	26.2	22.4	21.2	19.4	17.4	16.6	
105	49.0	45.0	41.6	37.4	31.4	25.4	21.6	20.6	18.6	16.8	16.0	
110	46.0	43.0	39.8	35.8	30.2	24.6	20.8	19.8	18.0	16.2	15.6	
115	44.0	41.0	38.0	34.6	28.8	24.0	20.2	19.2	17.2	15.6	15.0	
120	41.8	39.2	36.4	33.2	27.6	23.2	19.4	18.6	16.6	15.0	14.4	
125	39.8	37.2	35.0	31.8	26.6	22.6	18.8	18.0	16.0	14.6	14.0	
130	37.8	35.4	33.6	30.6	25.8	21.8	18.2	17.4	15.4	14.0	13.4	
135	35.8	33.6	32.2	29.2	25.0	21.2	17.6	16.8	15.0	13.6	13.0	
140	34.0	31.8	30.6	27.8	24.2	20.6	17.0	16.2	14.4	13.0	12.4	
145	32.0	30.0	29.2	26.6	23.4	20.0	16.4	15.6	14.0	12.6	12.0	
150	30.4	28.2	28.0	25.2	22.6	19.4	16.0	15.2	13.4	12.2	11.4	
155	28.8	26.4	26.6	23.8	21.8	18.8	15.4	14.8	13.0	11.8	11.0	
160	27.2	25.0	25.2	22.6	21.0	18.2	14.8	14.2	12.4	11.4	10.6	
165	25.6	24.0	23.8	21.6	20.2	17.6	14.4	13.8	12.0	11.0	10.2	
170	24.0	22.8	22.4	20.8	19.4	17.2	13.8	13.4	11.6	10.6	9.8	
175	22.2	21.8	21.2	20.0	18.6	16.6	13.4	13.0	11.2	10.2	9.6	
180	21.0	20.8	20.4	19.2	17.8	16.0	13.0	12.6	10.8	10.0	9.2	
185	19.2	19.6	19.4	18.4	17.2	15.4	12.6	12.2	10.4	9.6	8.8	
190	17.6	18.6	18.6	17.4	16.6	14.8	12.0	11.8	10.2	9.4	8.4	
195	16.2	17.2	17.6	16.6	15.8	14.4	11.6	11.4	9.8	9.0	8.2	
200	14.8	15.8	16.8	16.0	15.2	13.8	11.2	11.0	9.4	8.8	7.8	
205	14.4	15.8	15.2	14.6	13.2	10.6	10.6	9.2	8.4	7.6	6.6	
210	13.2	14.6	14.6	13.8	12.8	10.2	10.2	8.8	8.2	7.4	6.4	
215	12.0	13.4	13.8	13.2	12.2	9.8	9.8	8.4	7.8	7.0	6.2	
220	10.8	12.2	13.0	12.8	11.6	9.2	9.2	8.2	7.6	6.8	6.0	
225	11.2	12.0	12.2	11.2	8.8	8.8	7.8	7.4	6.6	5.8	5.0	
230	10.0	10.8	11.6	10.6	8.4	8.4	7.4	7.0	6.2	5.4	4.8	
235	9.0	9.8	10.6	10.2	7.8	8.0	7.0	6.8	6.0	5.2	4.6	
240	8.2	8.8	9.6	9.6	7.4	7.6	6.6	6.4	5.6	5.0	4.2	
245	7.8	8.6	8.8	8.8	6.8	7.2	6.2	6.2	5.4	4.8	4.0	
250	7.0	7.8	7.8	5.8	6.2	5.8	5.8	5.0	4.6	3.8	3.2	
255	6.0	6.8	7.0	5.0	5.4	5.4	5.6	4.8	4.6	3.6	3.0	
260	5.2	6.0	6.2	4.2	4.4	4.8	5.2	4.4	4.4	3.2	2.8	
265	5.2	5.4	3.4	3.6	4.0	4.8	4.0	4.2	3.0	2.6		
270	4.4	4.6	2.6	2.8	3.2	4.0	3.6	3.8	2.8	2.6		
275	3.8	3.8			2.4	3.2	2.8	3.6	3.2	2.6		
280	3.0	3.2				2.4		3.2		2.6		
285					2.4				2.6			


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Lattice extension

53 ft - 131 ft boom extension

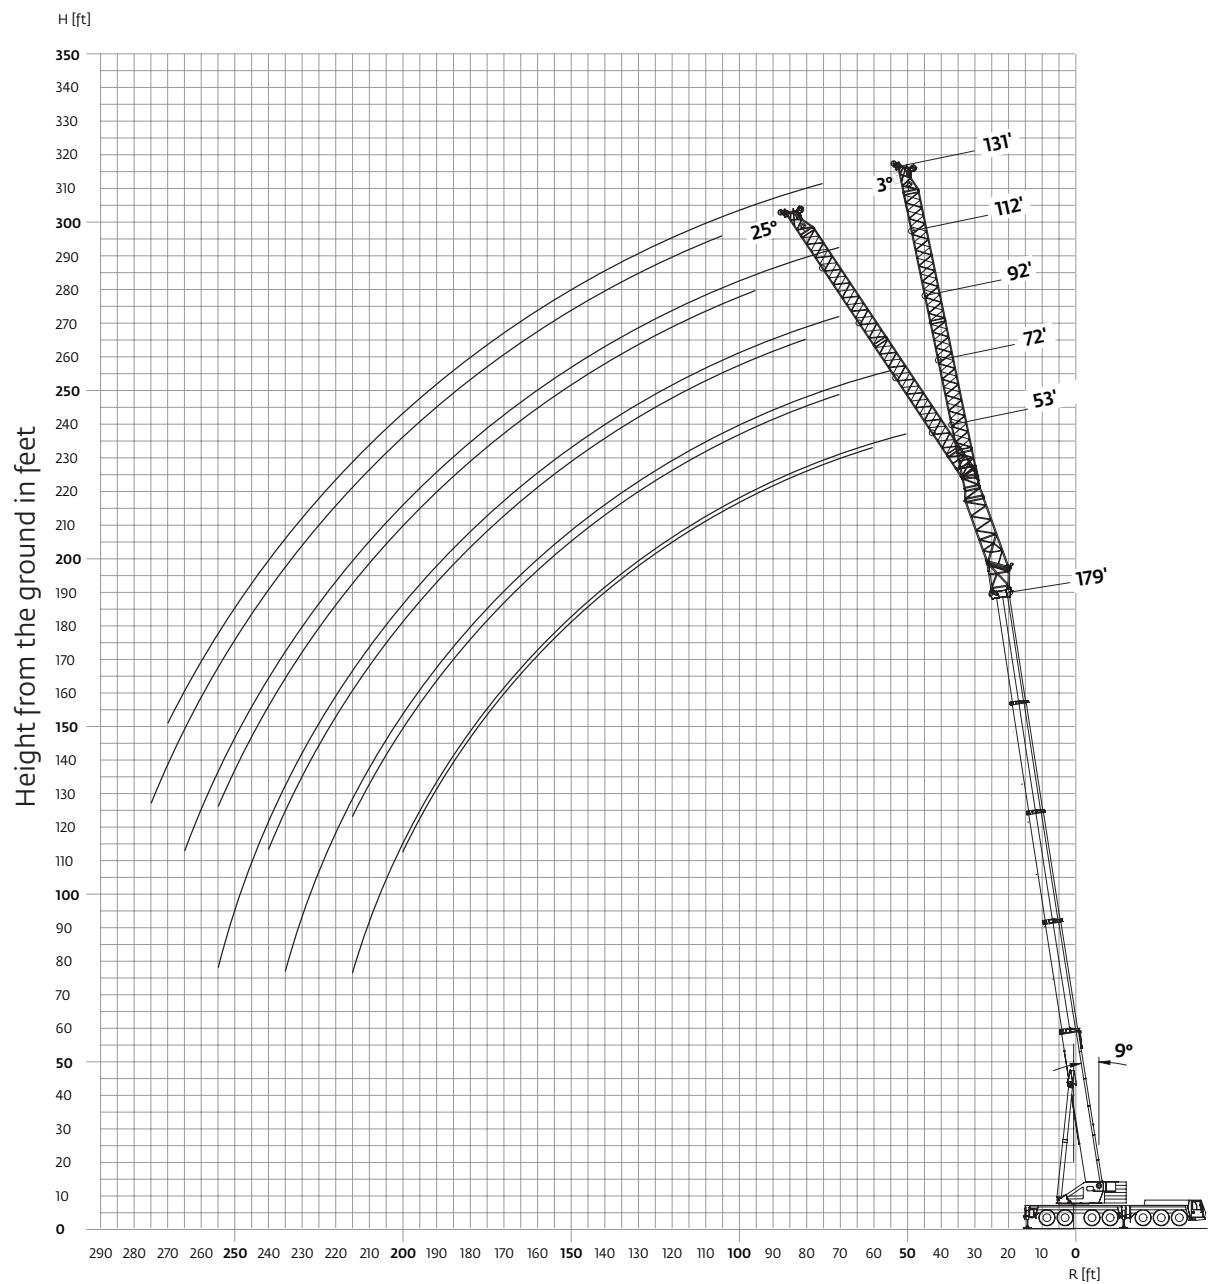

Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Lattice extension

49,8 m
(163.4 ft)

16 m - 60 m
(53 ft - 131 ft)

120 000 kg
(264,500 lb)

29 ft 2 in spread
(100%)

360°

Pounds (thousands)

Feet	163.4											
	52.5		72.2		91.9		111.6		131.2			
Feet	3°	25°	3°	25°	3°	25°	3°	25°	3°	25°	3°	25°
45	97.0											
50	94.0		74.0									
55	88.0	79.0	71.0									
60	82.0	77.0	69.0		54.0			43.2				
65	78.0	74.0	66.0		52.0			41.6				
70	73.0	71.0	63.0	51.0	50.0			40.0			34.6	
75	69.0	67.0	61.0	49.0	48.0			38.4			33.2	
80	65.0	64.0	58.0	48.0	47.0	36.4		37.0			32.0	
85	61.0	60.0	55.0	46.0	45.0	35.4		35.6			30.6	
90	57.0	57.0	53.0	45.0	43.4	34.4		34.4	25.0		29.0	
95	54.0	53.0	50.0	43.8	42.0	33.4		33.2	24.4		27.4	
100	51.0	51.0	48.0	42.8	40.6	32.6		32.2	23.8		26.0	19.8
105	48.0	48.0	45.0	41.6	39.2	31.6		31.0	23.2		25.2	19.2
110	46.0	46.0	43.4	40.4	38.0	30.6		29.8	22.6		24.4	18.8
115	43.2	43.4	41.4	39.0	36.6	29.4		28.6	22.0		23.6	18.2
120	41.2	41.2	39.4	37.8	35.4	28.2		27.4	21.4		22.8	17.8
125	39.0	39.2	37.4	36.4	34.2	27.0		26.2	21.0		22.2	17.4
130	37.0	37.2	35.4	35.2	33.0	26.6		25.2	20.4		21.4	17.0
135	35.0	35.2	33.4	33.6	31.8	26.0		24.4	20.0		20.8	16.6
140	32.8	33.4	31.6	31.8	30.6	25.4		23.8	19.6		20.2	16.2
145	31.2	31.4	29.6	30.0	29.2	24.8		23.0	19.2		19.6	15.8
150	29.4	29.8	27.8	28.2	27.6	24.2		22.4	18.8		19.0	15.4
155	27.8	28.0	26.0	26.4	26.2	23.6		21.8	18.4		18.6	15.0
160	26.0	26.4	24.4	25.0	24.8	23.0		21.2	18.0		18.0	14.8
165	24.4	24.8	23.4	23.8	23.2	22.4		20.6	17.6		17.6	14.4
170	22.6	23.2	22.2	22.8	21.8	21.8		20.6	17.4		17.0	14.2
175	20.6	21.2	21.2	21.6	20.8	21.2		19.8	17.0		16.6	13.8
180	18.8	19.4	20.0	20.4	19.8	20.4		19.2	16.8		16.2	13.6
185	17.2	17.6	19.0	19.4	19.0	19.6		18.6	16.4		15.8	13.4
190	15.6	16.0	17.4	18.2	18.0	18.6		17.2	16.2		15.4	13.2
195	14.0		15.8	17.0	17.0	17.6		16.4	15.6		15.0	13.0
200	12.6		14.4	15.4	16.0	16.8		15.8	15.2		14.6	12.6
205			13.0		14.6	15.8		14.8			14.2	12.4
210			11.8		13.2	15.0		15.0			13.8	12.2
215			10.6		12.0	13.6		14.2			13.2	12.0
220			9.4		10.8	12.2		13.2			12.4	11.6
225					9.8			12.0			12.8	11.4
230					8.8			11.0			11.6	11.2
235					7.8			9.8			9.8	11.0
240					6.8			8.8			8.8	10.6
245								7.8			7.8	10.2
250								6.8			6.8	9.0
255								6.0			6.0	7.8
260								5.0			5.2	6.8
265								4.2			4.4	
270											3.6	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Load chart

Lattice extension

54,6 m
(179,2 ft)

16 m - 40 m
(53 ft - 131 ft)

120 000 kg
(264,500 lb)

29 ft 2 in spread
(100%)

360°




Pounds (thousands)

Feet	179.2											
	52.5		72.2		91.9		111.6		131.2			
	3°	25°	3°	25°	3°	25°	3°	25°	3°	25°	3°	25°
45												
50	81.0											
55	77.0		67.0									
60	73.0	71.0	65.0									
65	70.0	67.0	61.0									
70	66.0	64.0	58.0	50.0	49.0			40.4				
75	63.0	61.0	55.0	48.0	47.0			39.0				
80	59.0	57.0	53.0	47.0	46.0	36.0		37.8				
85	56.0	54.0	50.0	46.0	44.0	35.0		36.6				
90	53.0	52.0	48.0	44.0	42.6	34.2		35.6				
95	50.0	49.0	46.0	43.0	41.2	33.2		34.4	25.6	26.6		
100	47.0	47.0	43.6	41.6	39.6	32.4		33.4	25.0	25.8		
105	45.0	45.0	41.6	40.0	38.0	31.6		32.4	24.4	25.0	19.2	
110	43.0	42.6	39.6	38.4	36.4	30.8		31.6	23.8	24.2	18.6	
115	40.8	40.6	38.0	36.8	34.8	30.0		30.6	23.2	23.4	18.2	
120	38.8	38.6	36.4	35.2	33.2	29.0		29.4	22.8	22.8	17.8	
125	36.6	36.8	34.8	33.4	31.8	28.0		28.2	22.2	22.0	17.4	
130	34.6	34.8	33.0	31.6	30.2	27.0		26.8	21.8	21.4	17.0	
135	32.8	32.8	31.4	29.8	28.6	26.0		25.6	21.4	20.8	16.6	
140	30.8	31.0	29.8	28.2	27.2	25.2		25.2	20.8	20.4	16.2	
145	28.8	29.0	28.4	27.0	25.6	24.4		24.2	20.4	19.8	15.8	
150	27.0	27.2	26.8	25.8	24.4	23.6		22.4	20.0	19.2	15.6	
155	25.2	25.4	25.4	24.8	23.4	23.0		19.8	18.6	18.6	15.2	
160	24.0	24.2	23.8	23.6	22.4	22.2		19.4	18.2	18.2	14.8	
165	22.8	23.2	22.4	22.6	21.4	21.4		19.0	17.6	17.6	14.6	
170	21.8	22.0	21.2	21.6	20.6	20.6		18.6	17.0	17.0	14.4	
175	20.6	20.8	20.2	20.6	19.6	19.8		19.0	18.0	16.6	14.0	
180	19.4	19.6	19.2	19.6	18.6	18.8		18.4	17.4	16.0	13.8	
185	18.0	18.4	18.2	18.6	17.8	18.0		16.8	15.6	15.6	13.6	
190	16.4	17.0	17.4	17.8	17.0	17.4		16.2	15.0	15.0	13.2	
195	15.0	15.4	16.4	16.8	16.2	16.6		15.4	15.6	14.4	13.0	
200	13.6	14.0	15.0	15.8	15.4	15.8		15.0	13.8	13.8	12.8	
205	12.2		13.8	15.0	14.6	15.0		14.6	14.4	13.2	12.6	
210	11.0		12.4	13.6	13.8	14.4		14.0	13.8	12.6	12.4	
215	9.8		11.2	12.2	12.8	13.6		13.2	13.2	12.0	12.2	
220		10.0		11.6	12.8	12.6		12.6	11.4	11.8		
225		9.0		10.4	11.8	11.2		12.0	12.0	10.8	11.4	
230		7.8		9.4	10.6	10.0		11.4	10.4	11.0		
235		6.8		8.4	9.4	9.0		10.8	9.8	10.4		
240			7.4	8.2	8.0	9.0		9.8	8.8	10.0		
245				6.4		7.2		8.6	7.8	9.4		
250					5.4	6.2		7.6	7.0	9.0		
255					4.6	5.4		6.6	6.0	8.4		
260						4.6			5.2	7.4		
265							3.8		4.4	6.4		
270									3.6	5.4		
275										4.4		

Working range

Lattice extension with MegaWingLift™

39 ft - 79 ft lattice extension with MegaWingLift

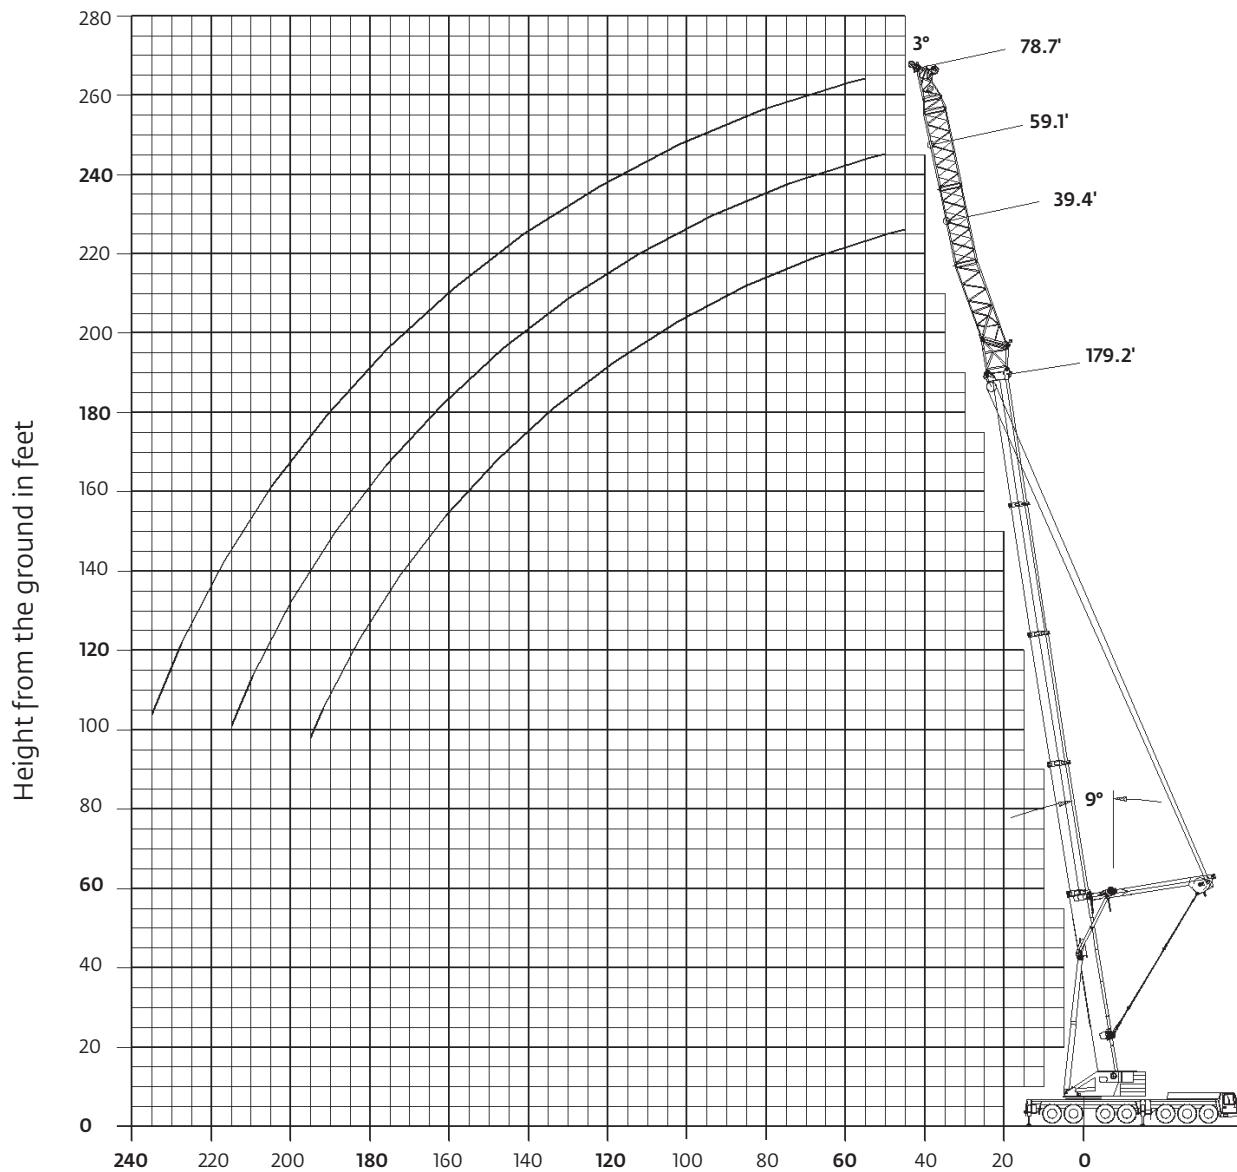

Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Lattice extension with MegaWingLift™

 49,8 m - 54,6 m
(163,4 ft - 179,2 ft)

 12 m - 24 m
(39 ft - 79 ft)

 160 000 kg
(352,700 lb)

 29 ft 2 in spread
(100%)

 360°

	 Pounds (thousands)					
Feet	39.4	59.1	78.7	39.4	59.1	78.7
Feet	3°	3°	3°	3°	3°	3°
40	114.0					
45	107.0	86.0		100.0		
50	100.0	81.0	66.0	94.0	78.0	
55	95.0	77.0	63.0	88.0	74.0	62.0
60	90.0	73.0	61.0	83.0	69.0	59.0
65	85.0	69.0	58.0	79.0	65.0	56.0
70	81.0	65.0	55.0	74.0	62.0	52.0
75	77.0	62.0	52.0	71.0	58.0	50.0
80	73.0	59.0	49.0	68.0	55.0	48.0
85	69.0	56.0	47.0	65.0	52.0	45.0
90	67.0	53.0	45.0	62.0	50.0	43.2
95	64.0	51.0	43.2	59.0	48.0	41.4
100	62.0	49.0	41.4	56.0	46.0	39.8
105	59.0	47.0	39.4	54.0	43.8	38.2
110	57.0	45.0	38.0	52.0	42.2	36.6
115	55.0	43.4	36.8	49.0	40.8	35.0
120	53.0	41.8	35.4	47.0	39.4	33.6
125	51.0	40.2	34.2	46.0	37.8	32.2
130	49.0	39.0	32.8	44.0	36.4	30.8
135	47.0	37.8	31.4	43.0	35.0	29.4
140	46.0	36.6	30.4	41.6	33.8	28.0
145	45.0	35.4	29.2	40.2	32.4	26.6
150	43.4	34.2	28.0	38.8	31.2	25.8
155	40.8	33.2	27.0	37.8	29.8	25.0
160	38.2	32.4	25.8	36.8	28.6	24.2
165	35.6	31.4	24.6	35.8	27.4	23.6
170	33.4	30.6	23.8	34.4	26.6	22.8
175	31.2	29.8	23.2	32.2	26.0	22.0
180	29.2	28.8	22.6	30.2	25.2	21.4
185		28.0	22.0	28.2	24.6	20.8
190		27.0	21.4	26.4	23.8	20.2
195		25.4	20.8	24.6	23.2	19.6
200		23.6	20.2		22.8	19.2
205			19.8		22.2	18.6
210			19.4		21.2	18.0
215			19.0		19.8	17.6
220			18.4			17.2
225						16.8
230						16.4
235						16.0


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Heavy duty jib

13 ft heavy duty jib

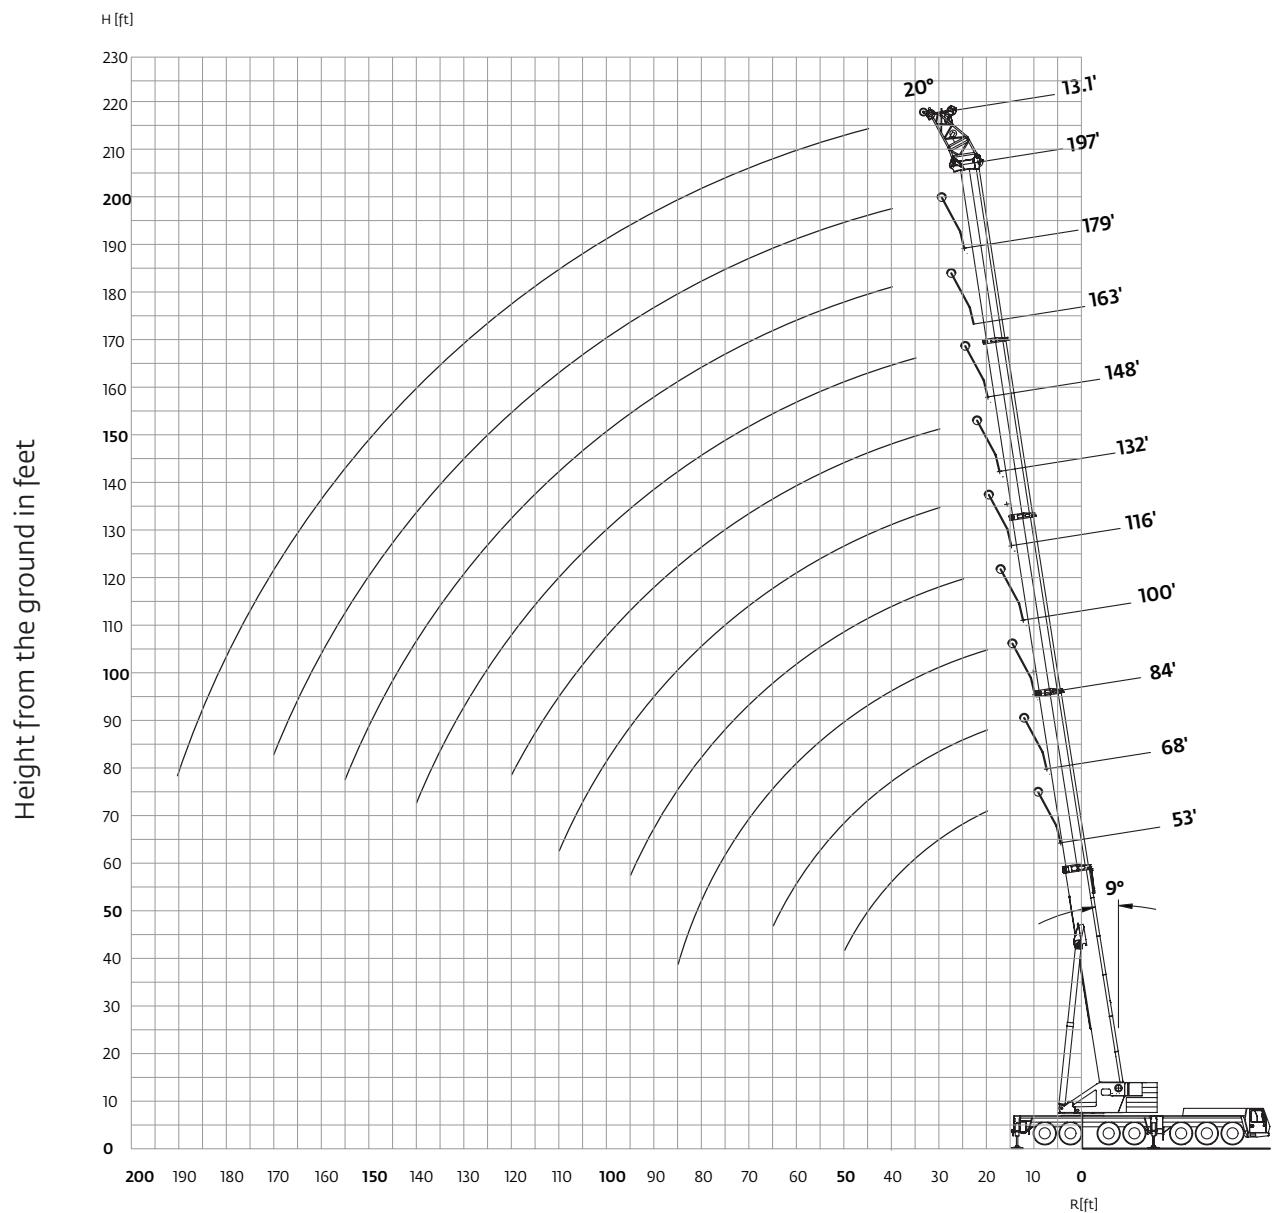


Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Heavy duty jib

	16,0 m - 60 m (53 ft - 197 ft)		4 m (13.1 ft)		120 000 kg (264,500 lb)		29 ft 2 in spread (100%)		360°	
									Pounds (thousands)	
Feet	52.6	68.4	84.3	100.1	115.9	131.7	147.6	163.4	179.2	196.9
20	190.0	190.0	190.0							
25	190.0	190.0	190.0	190.0						
30	190.0	190.0	190.0	190.0	190.0	190.0				
35	190.0	190.0	190.0	190.0	190.0	182.0	166.0			
40	190.0	190.0	190.0	190.0	181.0	167.0	153.0	138.0	120.0	
45	190.0	190.0	190.0	185.0	164.0	151.0	140.0	129.0	116.0	104.0
50	190.0	190.0	187.0	170.0	151.0	140.0	130.0	121.0	109.0	99.0
55		171.0	169.0	156.0	138.0	129.0	120.0	113.0	102.0	94.0
60		154.0	151.0	143.0	128.0	118.0	110.0	105.0	96.0	89.0
65		138.0	135.0	132.0	119.0	109.0	102.0	98.0	91.0	84.0
70		120.0	121.0	110.0	102.0	95.0	91.0	85.0	79.0	
75		107.0	108.0	103.0	95.0	88.0	85.0	80.0	74.0	
80		96.0	97.0	97.0	88.0	82.0	79.0	75.0	71.0	
85		86.0	88.0	88.0	83.0	77.0	74.0	71.0	67.0	
90		79.0	80.0	78.0	73.0	70.0	67.0	63.0		
95		72.0	73.0	74.0	68.0	66.0	63.0	60.0		
100			66.0	68.0	64.0	62.0	60.0	56.0		
105			60.0	62.0	61.0	58.0	57.0	53.0		
110			55.0	57.0	58.0	55.0	54.0	49.0		
115				52.0	54.0	52.0	51.0	47.0		
120				48.0	50.0	49.0	48.0	45.0		
125					46.0	47.0	45.0	42.6		
130						42.2	45.0	43.4	40.4	
135						39.0	41.2	41.4	38.2	
140						36.0	38.2	39.4	36.2	
145							35.4	37.4	34.4	
150							32.8	34.8	32.8	
155							30.4	32.4	31.0	
160								30.2	29.2	
165								28.0	27.4	
170								26.2	25.6	
175									24.4	
180									22.6	
185									21.0	
190									19.4	

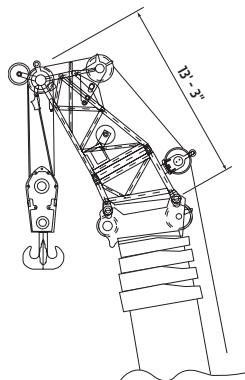


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Heavy duty jib

25 ft heavy duty jib

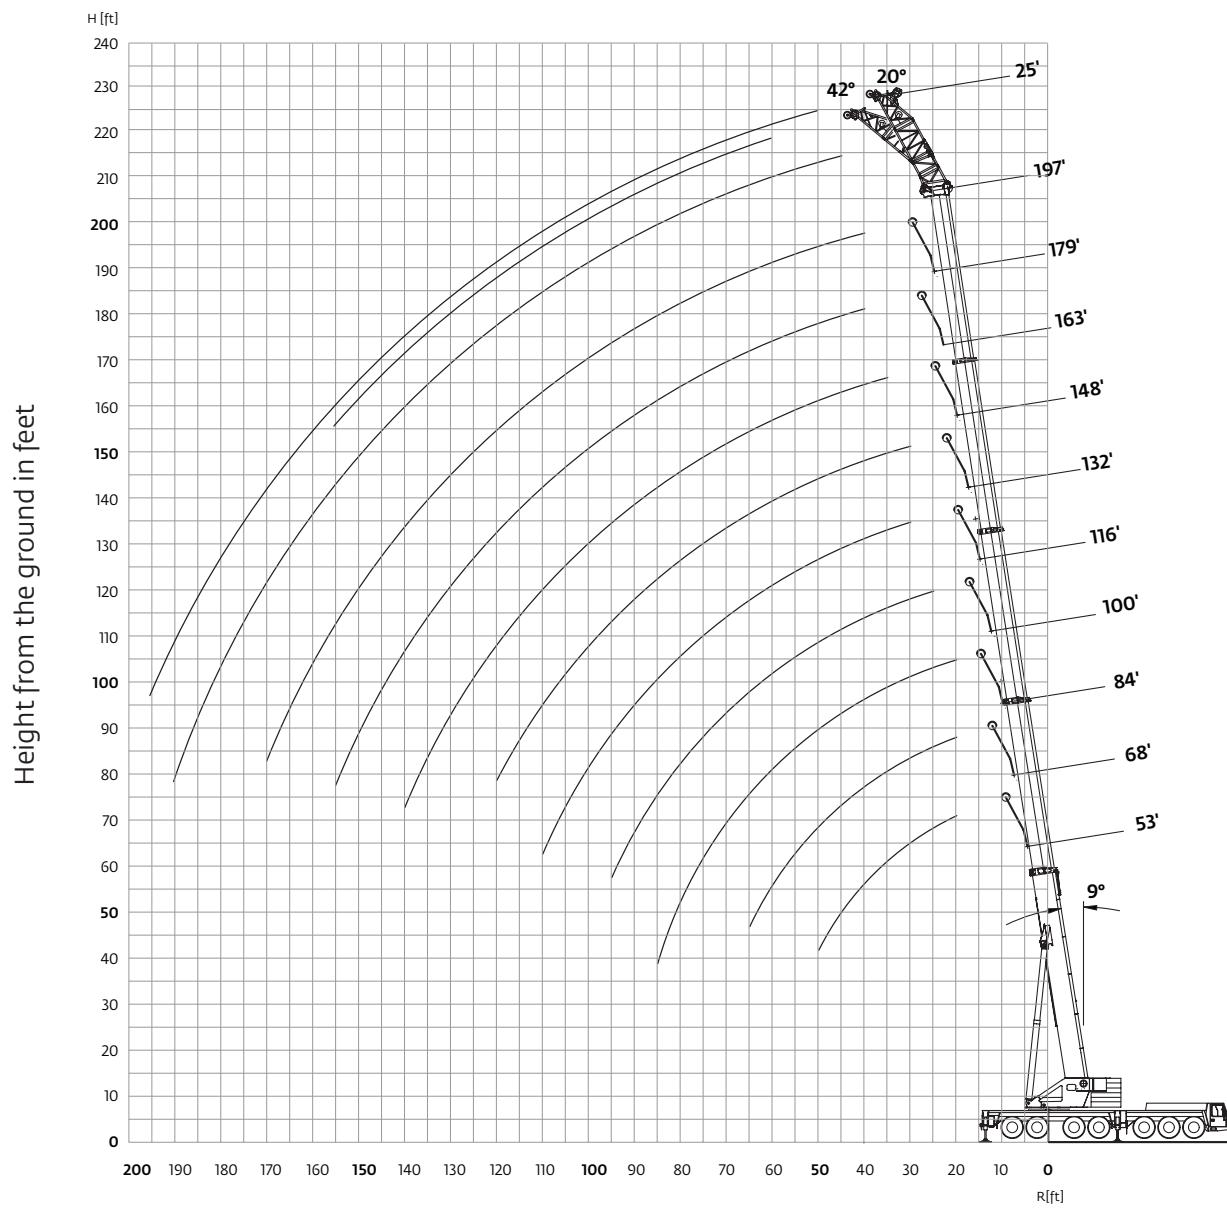


Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Heavy duty jib

	16,0 m - 60 m (53 ft - 197 ft)		7,5 m (24.6 ft)		120 000 kg (264,500 lb)		29 ft 2 in spread (100%)		360°												
Feet	52.6		68.4		84.3		100.1		115.9		131.7		147.6		163.4		179.2		196.9		
	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	
20	118.0		122.0																		
25	107.0	94.0	113.0	97.0	117.0																
30	100.0	89.0	106.0	93.0	110.0	95.0	114.0	96.0	115.0												
35	93.0	85.0	100.0	89.0	104.0	91.0	108.0	93.0	110.0	94.0	111.0										
40	88.0	81.0	94.0	85.0	99.0	88.0	103.0	90.0	105.0	91.0	107.0	92.0	106.0	92.0	104.0						
45	84.0	79.0	89.0	83.0	95.0	85.0	99.0	88.0	101.0	89.0	103.0	90.0	103.0	90.0	101.0		97.0				
50	79.0	77.0	85.0	80.0	91.0	83.0	95.0	85.0	98.0	87.0	100.0	88.0	100.0	87.0	99.0	87.0	95.0	84.0	88.0		
55	76.0		82.0	78.0	87.0	81.0	91.0	83.0	94.0	85.0	96.0	86.0	97.0	86.0	95.0	85.0	91.0	83.0	84.0		
60	75.0		79.0	77.0	83.0	79.0	88.0	81.0	91.0	83.0	93.0	84.0	94.0	84.0	91.0	83.0	87.0	82.0	80.0	78.0	
65	74.0		76.0	76.0	81.0	78.0	85.0	80.0	88.0	81.0	91.0	82.0	92.0	83.0	87.0	82.0	83.0	80.0	76.0	75.0	
70			75.0		79.0	77.0	82.0	78.0	86.0	80.0	88.0	81.0	87.0	80.0	83.0	80.0	78.0	76.0	72.0	72.0	
75			75.0		76.0	76.0	80.0	78.0	83.0	79.0	85.0	80.0	82.0	78.0	79.0	78.0	73.0	72.0	68.0	68.0	
80					74.0		78.0	77.0	80.0	77.0	81.0	77.0	78.0	75.0	75.0	74.0	69.0	69.0	65.0	65.0	
85					74.0		76.0	76.0	78.0	75.0	77.0	74.0	73.0	73.0	70.0	70.0	66.0	65.0	61.0	61.0	
90					74.0		76.0	76.0	75.0	73.0	73.0	72.0	69.0	69.0	66.0	66.0	62.0	62.0	58.0	58.0	
95							73.0		72.0	71.0	69.0	69.0	65.0	65.0	62.0	63.0	58.0	59.0	54.0	55.0	
100							68.0		68.0		65.0	66.0	61.0	61.0	59.0	60.0	55.0	55.0	52.0	52.0	
105							62.0		62.0		62.0	62.0	57.0	57.0	56.0	56.0	53.0	53.0	49.0	49.0	
110							56.0		57.0		58.0	59.0	53.0	54.0	52.0	53.0	50.0	50.0	47.0	47.0	
115							52.0		54.0		51.0	51.0	49.0	50.0	48.0	48.0	44.0	44.0	45.0	45.0	
120							48.0		49.0		49.0		48.0	49.0	47.0	47.0	45.0	45.0	42.0	42.4	
125									45.0		46.0		44.0	45.0	42.8	43.0	40.0	40.4	36.6		
130									41.4		42.8		42.2	42.4	40.4	40.8	38.2	38.6			
135									38.0		39.4		40.2	40.2	38.4	39.0	36.2	36.6			
140											36.4		38.0		36.4	37.2	34.4	34.8			
145											33.4		35.4		34.4		32.6	32.8			
150											30.6		32.8		32.4		30.8	31.0			
155													30.2		30.4		29.2	29.4			
160													27.8		28.4		27.6				
165															27.0		26.2				
170																25.2		24.6			
175																	23.4		23.0		
180																	21.6		21.4		
185																		19.8			
190																		18.2			
195																		16.8			

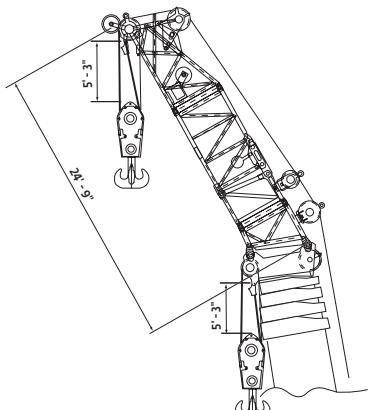


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Working range

Heavy duty jib with MegaWingLift™

13 ft heavy duty jib with MegaWingLift

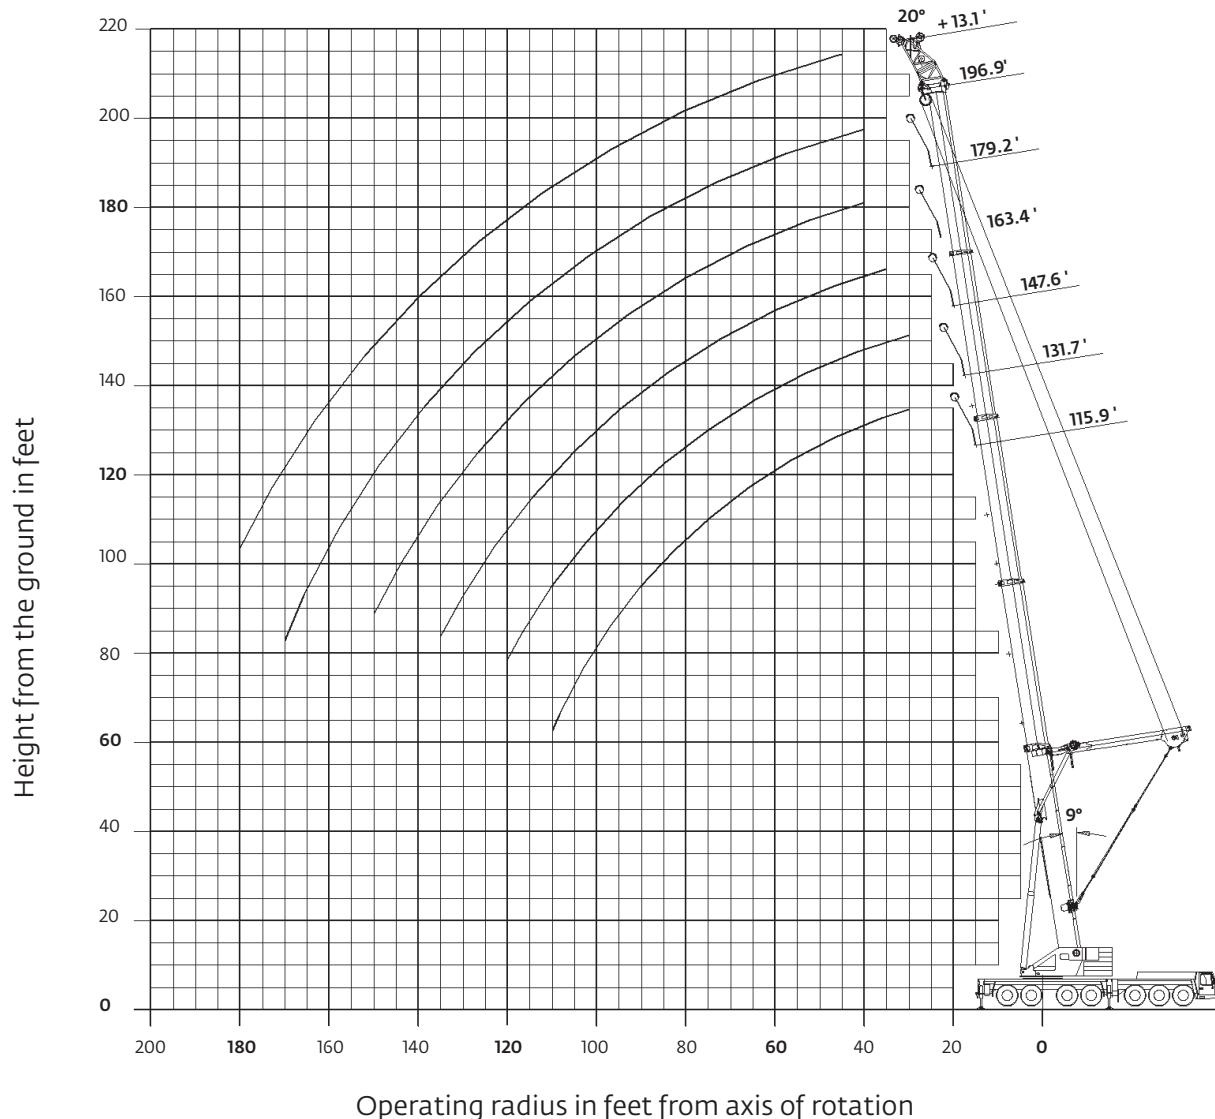

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Heavy duty jib with MegaWingLift™

 35,3 m - 60 m
(116 ft - 197 ft)

 4 m
(13.1 ft)

 160 000 kg
(352,700 lb)

 29 ft 2 in spread
(100%)

 360°



Pounds (thousands)

Feet	115.9	131.7	147.6	163.4	179.2	196.9
30	190.0	190.0				
35	190.0	190.0	190.0			
40	190.0	190.0	190.0	171.0	148.0	
45	190.0	190.0	190.0	162.0	139.0	128.0
50	187.0	186.0	188.0	154.0	132.0	121.0
55	173.0	175.0	175.0	146.0	125.0	115.0
60	157.0	159.0	165.0	140.0	119.0	109.0
65	143.0	145.0	155.0	134.0	113.0	104.0
70	131.0	133.0	145.0	128.0	108.0	99.0
75	120.0	123.0	134.0	122.0	103.0	95.0
80	110.0	113.0	123.0	115.0	99.0	91.0
85	102.0	104.0	113.0	106.0	95.0	88.0
90	94.0	97.0	104.0	99.0	91.0	84.0
95	88.0	90.0	97.0	92.0	87.0	81.0
100	81.0	84.0	90.0	86.0	84.0	78.0
105	76.0	78.0	84.0	80.0	81.0	76.0
110	69.0	73.0	78.0	75.0	76.0	73.0
115		68.0	73.0	70.0	72.0	70.0
120		63.0	68.0	66.0	67.0	68.0
125			59.0	61.0	63.0	63.0
130			55.0	57.0	59.0	59.0
135			51.0	54.0	55.0	56.0
140				50.0	52.0	52.0
145				47.0	49.0	49.0
150				44.0	46.0	46.0
155					43.0	43.2
160					40.6	40.6
165					38.2	38.2
170					35.2	36.0
175						33.8
180						31.8

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.


The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Courtesy of Crane.Market

Working range

Heavy duty jib with MegaWingLift™

25 ft heavy duty jib with MegaWingLift

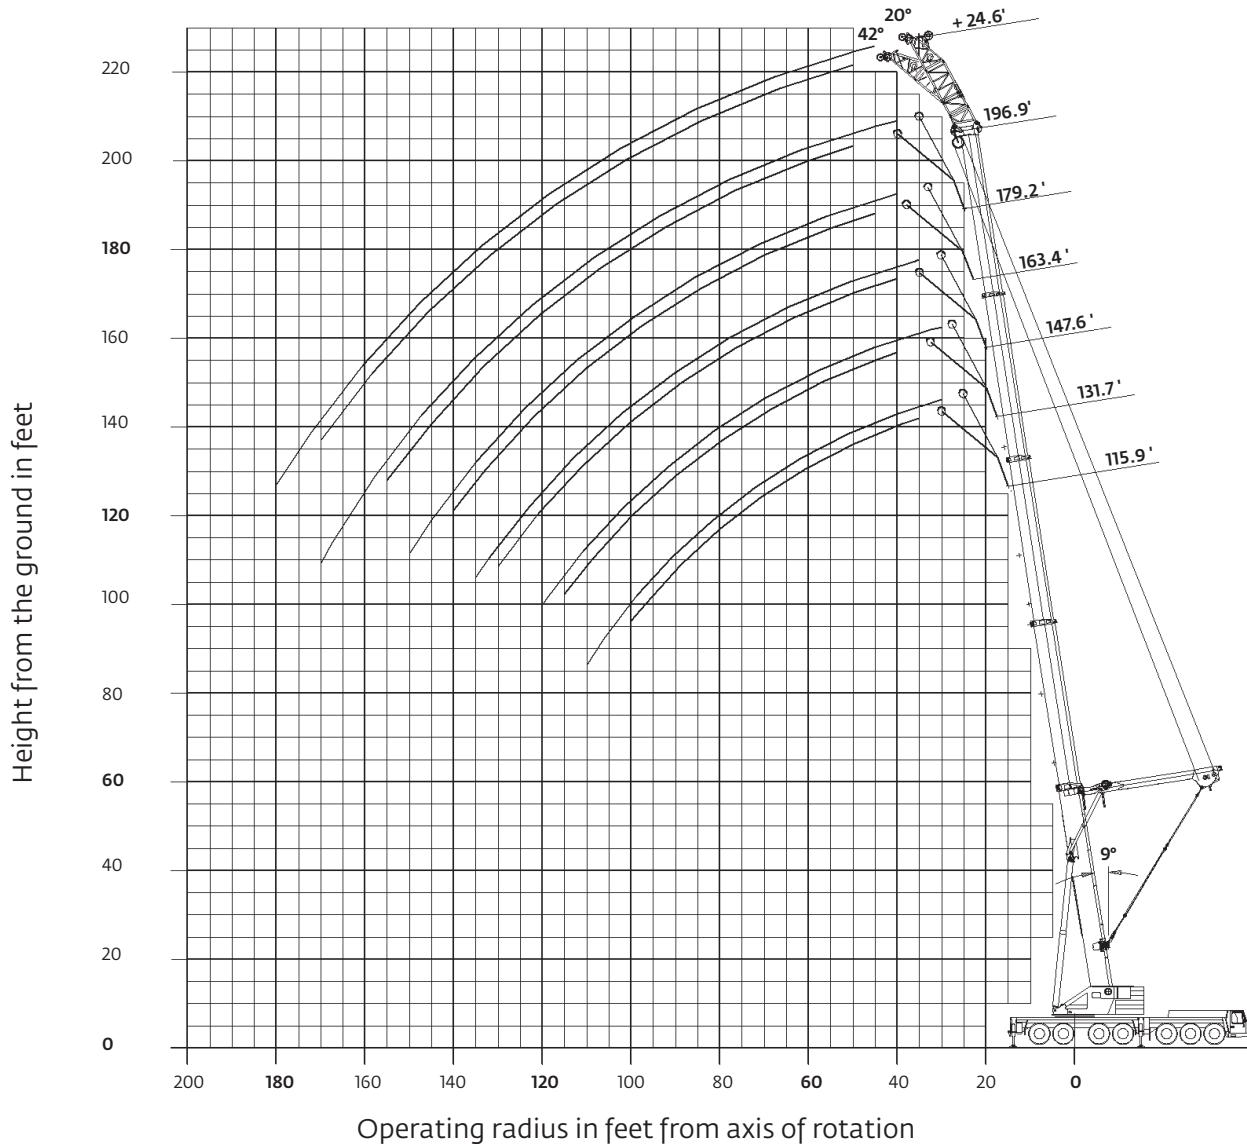

Hook heights shown in the working diagram do not consider loaded boom deflection.

Load chart

Heavy duty jib with MegaWingLift™

 35,3 m - 60,0 m
(116 ft - 197 ft)

 7,5 m
(24.6 ft)

 160 000 kg
(352,700 lb)

 29 ft 2 in spread
(100%)

 360°

Feet	Pounds (thousands)											
	115.9		131.7		147.6		163.4		179.2		196.9	
	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°	20°	42°
30	148.0		147.0									
35	140.0	114.0	140.0		138.0							
40	133.0	110.0	132.0	109.0	131.0	107.0	123.0		113.0			
45	126.0	106.0	126.0	105.0	125.0	104.0	117.0	100.0	108.0			
50	120.0	102.0	120.0	101.0	119.0	100.0	111.0	96.0	102.0	90.0	95.0	84.0
55	115.0	99.0	115.0	98.0	114.0	97.0	106.0	93.0	97.0	87.0	91.0	81.0
60	110.0	96.0	110.0	95.0	110.0	94.0	101.0	89.0	93.0	83.0	86.0	78.0
65	106.0	93.0	106.0	93.0	105.0	91.0	97.0	86.0	89.0	80.0	83.0	75.0
70	102.0	91.0	102.0	90.0	101.0	89.0	94.0	84.0	85.0	77.0	79.0	72.0
75	98.0	88.0	98.0	88.0	97.0	86.0	90.0	81.0	81.0	74.0	75.0	69.0
80	95.0	86.0	95.0	86.0	94.0	84.0	86.0	78.0	78.0	72.0	72.0	67.0
85	92.0	84.0	92.0	84.0	91.0	82.0	84.0	76.0	75.0	69.0	70.0	65.0
90	89.0	83.0	89.0	82.0	88.0	80.0	81.0	74.0	72.0	67.0	67.0	63.0
95	86.0	81.0	86.0	80.0	86.0	78.0	78.0	72.0	69.0	65.0	65.0	61.0
100	82.0	80.0	84.0	78.0	83.0	76.0	75.0	70.0	67.0	63.0	62.0	59.0
105	77.0		79.0	77.0	79.0	75.0	73.0	68.0	65.0	62.0	60.0	57.0
110	71.0		74.0	74.0	74.0	74.0	71.0	67.0	62.0	60.0	58.0	55.0
115	66.0		68.0	69.0	69.0	70.0	69.0	66.0	60.0	58.0	56.0	54.0
120	61.0		64.0		64.0	65.0	66.0	64.0	58.0	56.0	54.0	52.0
125			59.0		59.0	60.0	61.0	62.0	57.0	55.0	52.0	50.0
130			55.0		55.0	56.0	57.0	58.0	55.0	53.0	51.0	49.0
135			51.0		52.0		53.0	54.0	53.0	52.0	49.0	48.0
140					48.0		50.0	51.0	51.0	50.0	48.0	47.0
145					45.0		47.0		48.0	49.0	47.0	46.0
150					41.8		43.6		45.0	46.0	45.0	45.0
155							40.8		42.4	43.0	42.6	43.0
160							38.0		39.8		40.0	40.4
165									37.2		37.4	37.8
170									35.0		35.0	35.4
175									32.8		32.8	
180											30.8	
185											28.8	
190											27.0	
195											25.2	

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Courtesy of Crane.Market

Symbols glossary

	Axles		Counterweight		Grade		Gear
	Boom		Drive		Heavy duty jib		Radius
	Boom elevation		Electrical system		Hoist		Rotation
	Boom extension		Engine		Hookblock		Speed
	Boom length		Extension		Hydraulic system		Steering
	Boom nose		Frame		Lights		Suspension
	Brakes		Fuel tank capacity		Oil		Swing
	Cab		Outriggers		Outrigger controls		Tires
					Transmission		

Notes

Notes

Manitowoc Cranes

Regional headquarters

Americas

Manitowoc, Wisconsin, USA
Tel: +1 920 684 6621
Fax: +1 920 683 6277

Shady Grove, Pennsylvania, USA

Tel: +1 717 597 8121
Fax: +1 717 597 4062

Europe, Middle East, Africa

Ecully, France
Tel: +33 (0)4 72 18 20 20
Fax: +33 (0)4 72 18 20 00

China

Shanghai, China
Tel: +86 21 6457 0066
Fax: +86 21 6457 4955

Greater Asia-Pacific

Singapore
Tel: +65 6264 1188
Fax: +65 6862 4040

Regional offices

Americas

Brazil
Alphaville
Mexico
Monterrey
Chile
Santiago

Europe, Middle East, Africa

Czech Republic

Netvorice

France

Baudemont
Cergy

Decines

Germany

Langenfeld

Hungary

Budapest

Italy

Lainate

Netherlands

Breda

Poland

Warsaw

Portugal

Baltar

Russia

Moscow

South Africa

Johannesburg

U.A.E.

Dubai

U.K.

Buckingham

China

Beijing
Chengdu
Guangzhou
Xian

Greater Asia-Pacific

Australia

Brisbane
Melbourne

Sydney

India
Chennai
Delhi
Hyderabad
Pune

Korea

Seoul

Philippines

Makati City

Singapore

Factories

Brazil

Passo Fundo

China

TaiAn

Zhangjiagang

France

Charlieu

Moulins

Germany

Wilhelmshaven

India

Pune

Italy

Niella Tanaro

Portugal

Baltar

Fânzeres

Slovakia

Saris

USA

Manitowoc

Port Washington

Shady Grove

This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.