


# GROVE TT865 BE – OPIS TECHNICZNY

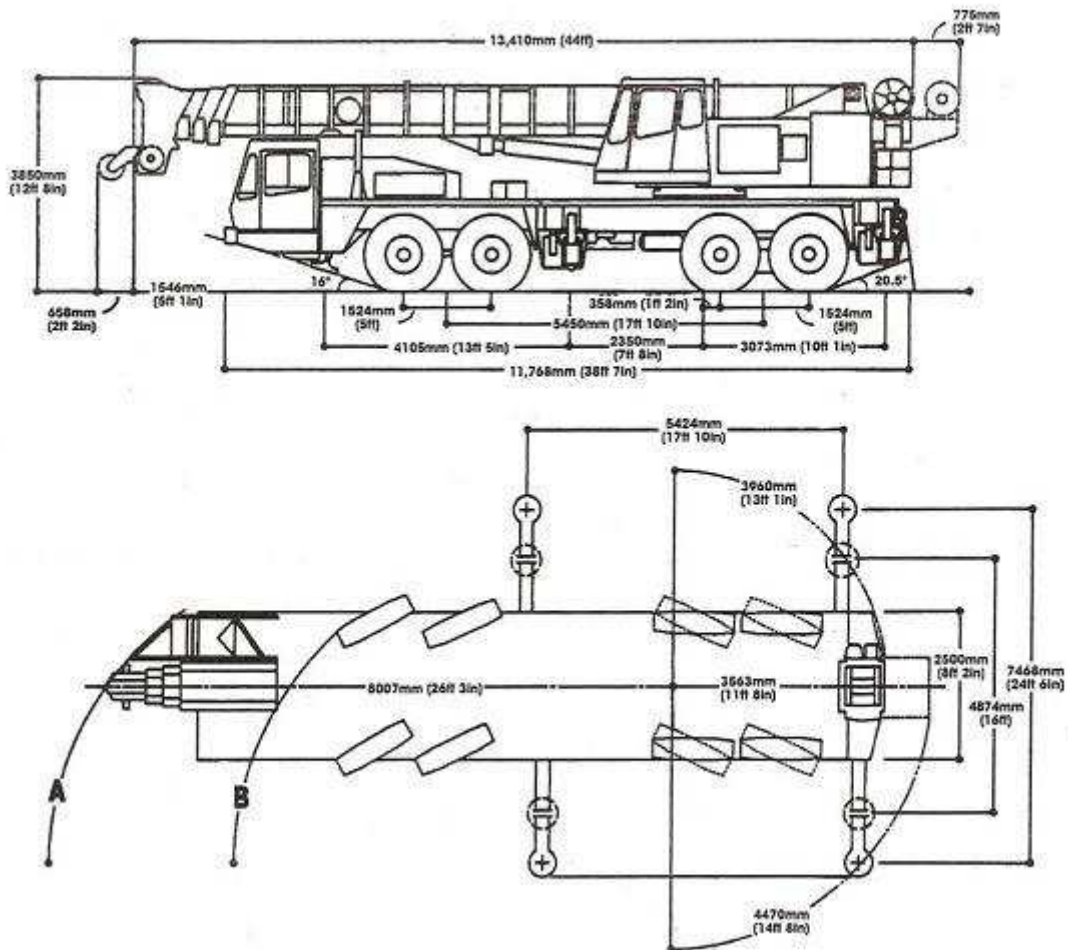


# GROVE TT865 BE

udźwig maksymalny: 70 T

wysięgnik podstawowy: 12,10 – 38,00 m (teleskopowy)

wysięgnik pomocniczy: 10,60 – 18,50 m (kratowy)

TABELA UDŹWIGU

	 <b>DIN/ISO</b>									
	12,10	13,70	16,80	19,80	22,90	25,90	29,00	32,00	35,10	38,00
(m)	(T)	(T)	(T)	(T)	(T)	(T)	(T)	(T)	(T)	(T)
2,80	70,00*									
3,00	60,00	60,00	50,80	38,40						
3,50	55,00	55,00	46,80	37,80	25,15					
4,00	50,20	50,20	43,40	34,85	25,15					
4,50	45,65	45,65	40,10	32,00	25,15	25,15				
5,00	41,95	41,95	37,30	29,50	25,15	25,15	22,60	17,55		
6,00	34,55	34,55	32,40	25,30	24,15	22,70	21,15	17,55	13,85	
7,00	29,00	29,00	28,40	22,05	20,55	19,80	19,10	17,50	13,85	11,15
8,00	24,80	24,80	24,20	19,50	18,15	17,45	16,90	15,75	12,10	11,15
9,00	21,45	21,45	20,90	17,30	16,15	15,50	15,05	14,15	10,80	11,15
10,00		18,50	18,15	15,50	14,50	13,85	13,45	12,70	9,75	10,90
12,00			12,90	12,55	11,65	11,35	11,00	10,40	8,10	9,05
14,00			9,55	9,40	9,70	9,45	9,15	8,70	6,85	7,65
16,00				7,10	7,40	7,85	7,75	7,35	5,90	6,55
18,00					5,65	6,10	6,40	6,35	5,15	5,65
20,00					4,35	4,75	5,05	5,20	4,50	4,85
22,00						3,70	4,05	4,25	4,00	4,20
24,00							3,15	3,40	3,60	3,70
26,00							2,45	2,70	2,90	3,05
28,00								2,10	2,30	2,45
30,00									1,80	1,95
32,00									1,35	1,50
34,00										1,15

# GROVE TT865 BE – DIAGRAM UDŹWIGU

