

GRW 180i-10

Pneumatic tire roller

Pneumatic tire rollers Series GRW 180/280 / Series H228




HIGHLIGHTS GRW 180/280

- > Simple ballast design
- > Spacious cab
- > Simple access for service and maintenance work
- > Optimum visibility, view of tire's outer edges
- > Self-explanatory display
- > Transport height below 3 meters
- > Adjustable driver seat, swivels +/- 90°



Machine dimensions

Total length (L)	mm • in	4670 • 183.9
Width (B)	mm • in	2144 • 84.4
Total height (H)	mm • in	3035 • 119.5
Width over tires (Y)	mm • in	1830/1830 • 72.0/72.0
Height, loading, min. (HI)	mm • in	2189 • 86.2

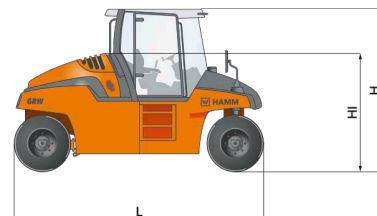

EU Stage
IIIB/EPA
Tier 4

TECHNICAL DATA		Unit	GRW 180i-10
	Weights		
	Operating weight with cab	kg • lbs	8785 • 19,371
	Operating weight with ROPS	kg • lbs	8645 • 19,062
	Basic weight no cab, without ROPS	kg • lbs	7905 • 17,431
	Operating weight, max.	kg • lbs	18000 • 39,690
	Load per tire, front/rear	kg • lbs	1063,75/1132,5 • 2,346/2,497
	Machine dimensions		
	Total length	mm • in	4670 • 183.9
	Total height with cab	mm • in	3035 • 119.5
	Height, loading, min.	mm • in	2189 • 86.2
	Wheelbase	mm • in	3600 • 141.7
	Total width with cab	mm • in	2144 • 84.4
	Max. working width	mm • in	2084 • 82.0
	Ground clearance, center	mm • in	200 • 7.9
	Turning radius, inside	mm • in	5640 • 222.0
	Wheel dimensions		
	Size of tires, front/rear		11.00-R20/11.00-R20
	Width over tires, front/rear	mm • in	1830/1830 • 72.0/72.0
	Number of tires, front/rear		4/4
	Diesel engine		
	Manufacturer		DEUTZ
	Type		TD 3.6 L4
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		55,4/75,3/2300
	Power rating SAE J1349, kW/HP/rpm		55,4/74,2/2300
	Emission standard		EU Stage IIIB/EPA Tier 4
	Exhaust gas after-treatment		DOC
	Drive		
	Speed, infinitely variable	km/h • mph	0-15,0 • 0.0-9.3
	Regulation, infinitely variable		Hammtronic
	Climbing ability, with/no ballast		25/35
	Steering		
	Steering, type		Two-point steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L • Gal	235 • 62.1
	Water tank, capacity	L • Gal	195 • 51.5
	Sound level		
	Acoustic power LW(A), sticker		101
	Acoustic power LW(A), measured		100

EQUIPMENT
Dashboard with displays, indicator lights and switches, Tilttable dashboard, Ballast chambers for flexible ballasting, Operator's platform with entry from both sides, Spring-mounted driver's seat with armrests and safety belt, Hammtronic—electronic machine management, Leveling of front wheelset, View channel to tire surfaces, Soft ramp for soft starting and braking, Spray system with spray bars front and rear, ROPS, rigid

OPTIONAL EQUIPMENT
Working light, Back-up alarm, Seat-operating unit, adjustable, Additional drive lever, left, Anti-freeze injection, HAMM Temperature Meter, HCQ-GPS compaction documentation, Heating and air conditioning, Heating, Edge pressing and cutting equipment, Radio, Tire lighting, Tire inflation system, Rotating beacon, Protective roof, Thermal aprons, ROPS cabin, Rear area camera, Guard rail on maintenance platform, Step water tank, Telematics interface, Rear and front axle brake, Tire heating with thermal aprons, Guard bracket for water tank, Additional water tank, complete

WIRTGEN AMERICA

6030 Dana Way
Antioch, TN 37013
615-501-0600
Fax 615-501-0691
www.wirtgen-group.com/america

HAMM AG

Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu



Pneumatic tire rollers / Series GRW 180/280 EU Stage IIIB/EPA Tier 4/ GRW 180i-10 05:17 2452010 en-US V3
Further data on request / subject to change
Illustrations may contain optional features.