



# HIAB 255K

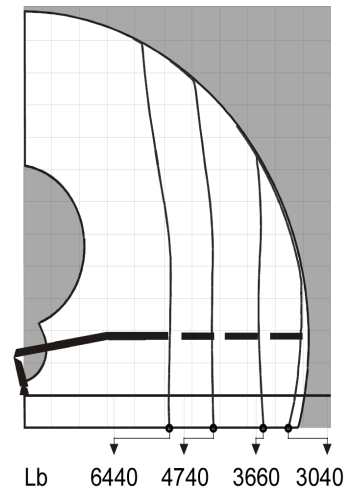

# HIAB 255K BASIC DATA

TECHNICAL DATA	255K-2 PRO	255K-2 HIPRO	255K-3 PRO	255K-3 HIPRO
Max. lifting capacity (ft-lbs)	166 710	180 670	156 360	170 400
Outreach, hydraulic extensions (ft)	43' 4"	43' 4"	51' 2"	51' 2"
Outreach, manual extensions (ft)	-	-	-	-
Outreach, with jib (ft)	-	-	-	-
Outreach / lifting capacity (ft-lbs)	26' 3" - 6 260	26' 3" - 6 720	26' 3" - 5 950	26' 3" - 6 440
	33' 10" - 4 720	33' 10" - 5 070	33' 6" - 4 370	33' 6" - 4 760
	42' 0" - 3 700	42' 0" - 4 060	41' 8" - 3 350	41' 8" - 3660
	-	-	49' 6" - 2 780	49' 6" - 3 040
	-	-	-	-
Outreach / lifting capacity, with jib (ft-lbs)	-	-	-	-
Slewing angle (°)	450	450	450	450
Height in folded position (in)	113	113	113	113
Width in folded position (in)	98	98	98	98
Installation space needed (in)	33	33	33	33
Weight, "standard" crane without stabilizers (lbs)	7 740	7 830	8 220	8 310
Weight, stabilizer equipment (lbs)	1 290	1 290	1 290	1 290
Weight, jib (lbs)	-	-	-	-

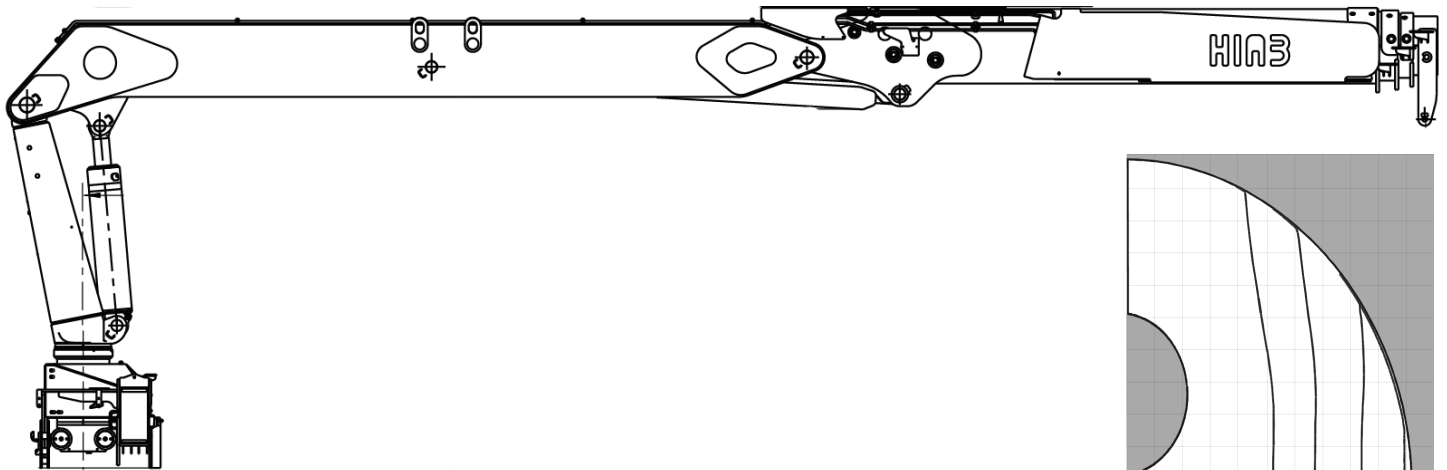

**Disclaimer.** Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com  
Hiab is part of Cargotec.  
www.cargotec.com

Hiab USA, Inc  
12233 Williams Road  
Perrysburg, OH 43551 USA  
tel. +419 482 6000  
fax. +419 482 6001

hiab.us.com



V2015.05.14