

# 3246E2

## ELECTRIC SCISSOR LIFT





[www.jlg.com](http://www.jlg.com)



Courtesy of Crane.Market

# JLG MODEL 3246E2

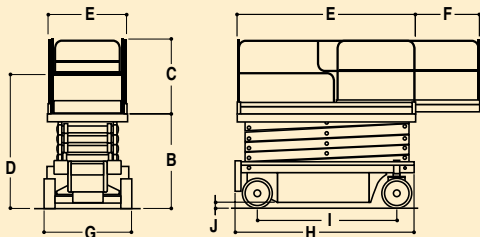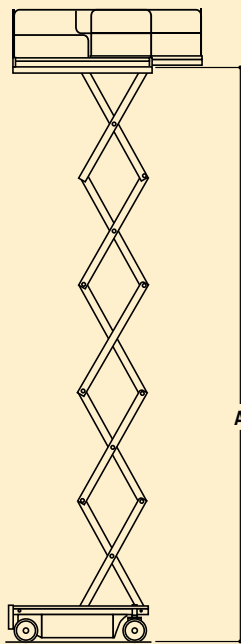

## DIMENSIONAL DATA

A. Platform Height - Elevated	32 ft. (9.75 m)
B. Platform Height - Lowered	4 ft. 3 in. (1.30 m)
C. Platform Railing Height*	3 ft. 7.5 in. (1.10 m)
D. Overall Height (Rails Folded)	6 ft. 5 in. (1.96 m)
E. Platform Size	45 x 84 in. (1.14 x 2.13 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	3 ft. 10 in. (1.17 m)
H. Overall Length	7 ft. 6.5 in. (2.30 m)
I. Wheelbase	5 ft. 8.5 in. (1.74 m)
J. Ground Clearance	3.0 in. (7.62 cm)
Platform Capacity	700 lbs (318 kg)
Capacity on Platform Extension	250 lbs (113 kg)
Lift/ Lower Time	60/57 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight**	6,100 lbs. (2,767 kg)

## CHASSIS

Drive Speed - Lowered	2.0 mph (3.2 kph)
Drive Speed - Elevated	0.5 mph (0.8 kph)
Gradeability	25%
Turning Radius (Inside)	45 in. (1.14 m)
Turning Radius (Outside)	115 in. (2.92 m)
Tire Size/ Type	16 x 5 Non-Marking Solid
Brakes	Automatic Rear Wheel Parking

## POWER SOURCE

Batteries	4 x 6V 245 amp-hr
Charger	20 Amp Automatic SCR 120/250V, 50/60 HZ
Electric Motor	4.5 hp (3.4 kW)
Pump	Single Section Gear
Hydraulic Reservoir	4 gal. (15.2 L)

\*Special heights available, consult factory.

\*\*Certain options or country standards will increase weight.

# PERFORMANCE FEATURES

## Standard Features

3 ft. Roll-out Deck Extension  
 Moveable, Removeable Platform Console Box  
 Lanyard Attach Points  
 Three Speed Joystick Drive Control with Thumb Steer  
 Positive Traction  
 Lubrication Free Scissor Arm Bushings  
 Scissor Maintenance Prop  
 Manual Descent Pull Cable  
 Swing-Out Battery and Hydraulic Compartment Doors  
 Four 6V 245 Amp-Hour Deep Cycle Batteries  
 20 Amp Automatic SCR Battery Charger  
 Hourmeter  
 Pot-Hole Protection  
 Powder-Coated Steel, Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners  
 Tie Down Lugs  
 Fork Lift Pockets  
 2 Degree Slope Alarm & Light  
 Descent Alarm  
 Solid Non-Marketing Tires

## Available Options

110V-AC Receptacle  
 Battery Condition Indicator  
 Spring-Loaded 1/2 Gate<sup>1</sup>  
 Drywall Gate  
 Horn  
 800 W-AC Generator<sup>2</sup>  
 Pressure Check Port  
 All Motion Alarm  
 Flashing Amber Beacon

1. Includes drywall gate.

2. Includes 110V outlet.

## The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, and ANSI A92.6-1999 as originally manufactured for intended applications.

## JLG Industries, Inc.

1 JLG Drive  
 McCConnellsburg, PA 17233-9553  
 Telephone 717-485-5161  
 Toll-free in US 877-JLG-LIFT  
 Fax 717-485-6417  
 www.jlg.com

Printed in USA  
 FORM NO.: SS-3246E2-1298-10M  
 PART NO.: 3131305  
 R01012



Courtesy of Crane.Market