



ADT SERIES

# 1228 ADT



## VERSATILITY AT ITS FINEST

The K-Tec™ 1228 has versatility, making it one of K-Tec's most popular models. The hitching system mounts onto a 25, 30, or 35-Ton articulated dump truck chassis, making the K-Tec 1228 ADT perfect for small jobsite applications.

# 1228 ADT SPECIFICATIONS

General Specifications	Standard	Metric
Heaped Capacity (ISO)	28 Cubic Yards	21.4 Cubic Metres
Struck Capacity	18.5 Cubic Yards	14.1 Cubic Metres
Max Loading Rating	68,000 lbs	30,844 kgs
Bucket Dimensions	12' W x 4' H x 11" L	3.66m W x 1.22m H x 3.35m L
Cutting Width	12'	3.66m
Cutting Edge	3-Piece Blade	3-Piece Blade
Gate Opening	78"	1.98m
Rack Height (Tiltable)	3'	0.91m
Gate Cylinders	4.5" x 26.5"	114mm x 673mm
Lift Cylinders	5.5" x 32"	140mm x 813mm
Ejector Cylinder	5.5" x 76"	140mm x 1,930mm
Transport Cutting Edge Clearance	28"	0.71m
Ball To Rear Axle Length	27' 6"	8.38m
Wrap Around Mud Scrapers	Standard	Standard
Radial Tires (4)	23.5 R25	23.5 R25

## Gallery

### Volvo A30G & K-Tec 1228 ADT



### Clay / Manitoba, Canada



### Topsoil / Virginia, USA



### Clay / Manitoba, Canada




## K-Tec Scraper Features



## Optional Upgrades

Floater Tires (2) + Rims & Axle Assembly	1000/50 R25 1050/50 R32
Brake System	4 caliper disc brakes
Truck Chassis Catwalk System	Easy access steps and platform
Truck Fender System	Protects truck from material flinging from tires

## Recommended Power Units

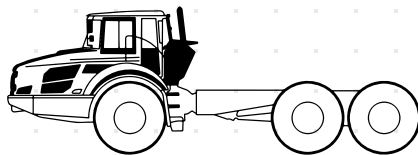

313HP +/-233 KW + Articulated Dump Truck

Transportation Measures	Standard	Metric
Overall Width	14'	4.27m
Overall Height	9' 1"	2.77m
Overall Length	34' 7"	10.55m
Shipping Weight	31,720 lbs	14,388 kgs

Specifications are subject to change without notice.