


TECHNICAL SPECIFICATIONS | TRACK-MOUNTED SCREENING PLANT

MOBISCREEN MS 15 Z



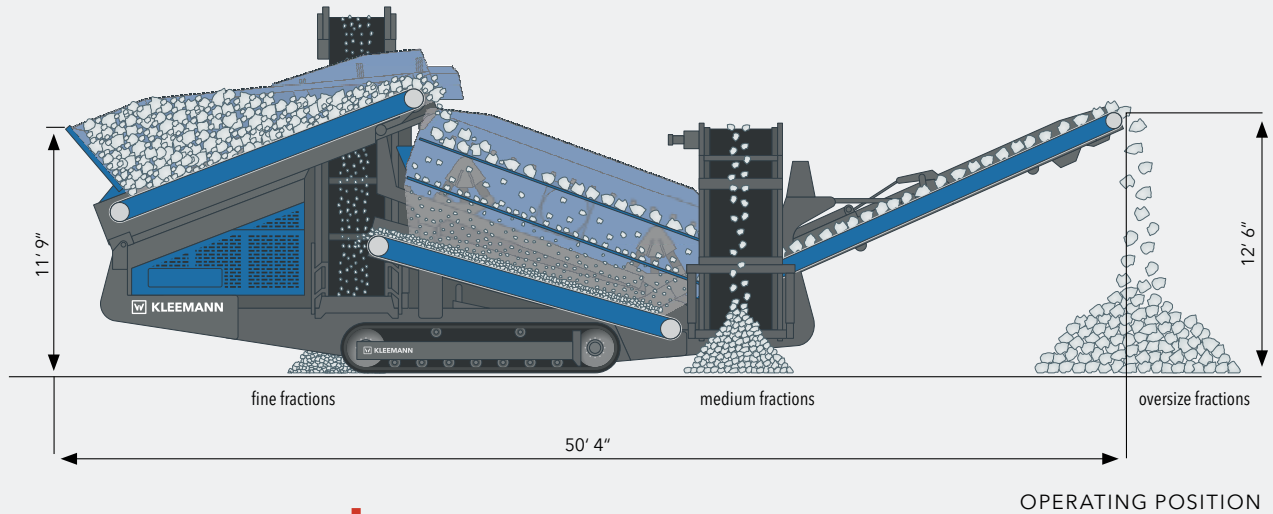

TECHNICAL HIGHLIGHTS

- Double-deck screening unit
- Diesel-hydraulic drive
- Scalping screen
- Max. feed size: 16"

TECHNICAL SPECIFICATIONS MS 15 Z - US SPEC

Feeding unit

Feed capacity up to approx. (US t/h)	441
Feed size max. (inch)	16"
Feed height (inch)	11' 9" (9' 11")
Hopper capacity (yd ³)	10.5

Belt conveyor feeder

Width x length (inch)	4' 7" x 14' 9"
Type (optional)	variable speed

Screening unit

Type	double-deck vibration screen
Top deck width x length (inch)	5' x 16'
Bottom deck width x length (inch)	5' x 15'

Belt conveyor underflow material

Width x length (inch)	4' x 14' 9"
-----------------------	-------------

Bottom deck underflow discharge conveyor (fine fractions)

Width x length (inch)	3' x 25'
Discharge height approx. (inch)	11' 6" - 13' 2"

Bottom deck overflow

discharge conveyor (medium fractions)

Width x length (inch)	3' x 25'
Discharge height approx. (inch)	8' 3" - 11' 10"

Top deck overflow

discharge conveyor (oversize fractions)

Width x length (inch)	4' 7" x 18'
Discharge height approx. (inch)	9' 2" - 12' 6"

Drive

Drive concept	diesel-hydraulic
Powerpack CAT (Tier 4f/Stage IV) (hp)	127

Transport

Transport height approx. (inch)	11' 2"
Transport length approx. (inch)	50' 4"
Transport width approx. (inch)	9' 6"
Transport weight approx. (lbs)	74,900