


TECHNICAL SPECIFICATIONS | TRACK-MOUNTED SCREENING PLANT

# MOBISCREEN MS 952 EVO



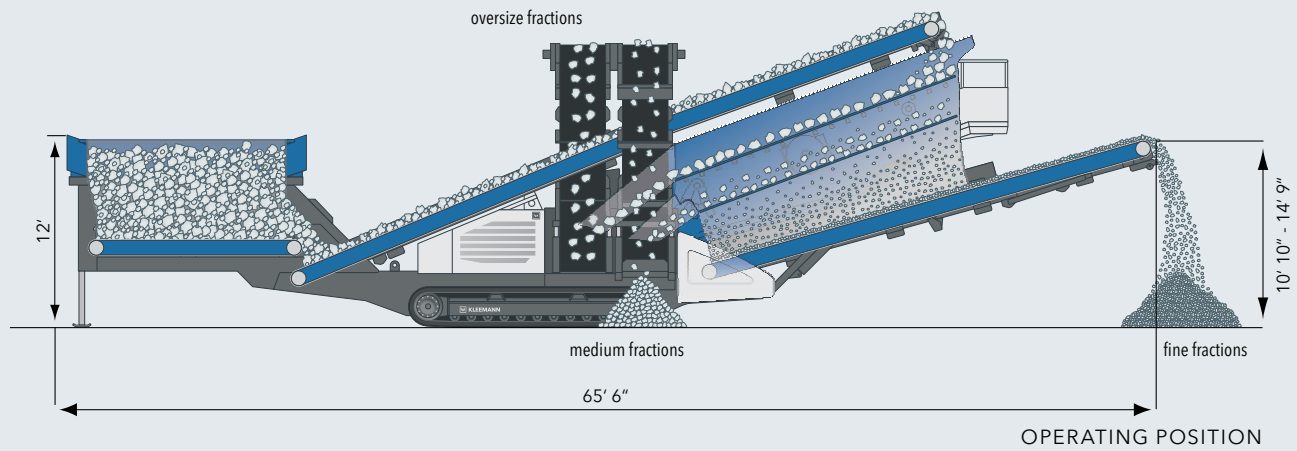

**TECHNICAL HIGHLIGHTS**

- Double-deck screening unit
- Diesel-hydraulic drive
- Classifying screen
- Max. feed size: 6"

**TECHNICAL SPECIFICATIONS MS 952 EVO - US SPEC**

**Feeding unit**

Feed capacity up to approx. (US t/h)	551
Feed size max. (inch)	6" x 6"
Feed height - foldable slotted grate (inch)	12'
Hopper capacity (yd <sup>3</sup> )	10.5

**Hopper discharge conveyor**

Width x length (inch)	4' x 11' 6"
-----------------------	-------------

**Feeding conveyor**

Width x length (inch)	4' x 39' 4"
-----------------------	-------------

**Screening unit**

Type	double-deck vibration screen
Width x length (inch)	5' 1" x 20'

**Main discharge conveyor**

Width x length (inch)	4' x 26' 7"
Discharge height approx. (inch)	10' 10" - 14' 9"

**Side conveyor right hand side**

Width x length (inch)	2' 8" x 33' 6"
Discharge height approx. (inch)	16' 5"

**Side conveyor left hand side**

Width x length (inch)	2' 8" x 33' 6"
Discharge height approx. (inch)	16' 5"

**Drive**

Drive concept	diesel-hydraulic
MS 952: Deutz (Tier 3/Stage IIIA) (hp)	121
MS 952i: Deutz (Tier 4f/Stage IV) (hp)	121

**Transport**

Transport height approx. (inch)	11' 2"
Transport length approx. (inch)	61'
Transport width approx. (inch)	9' 10"
Transport weight approx. (lbs)	74,750