KUBOTA MINI-EXCAVATOR







Reaching a higher level of performance is easy when you've got the most digging power in your class. The Kubota KX71-3 mini-excavator.

Operate the KX71-3 mini-excavator's control levers. And you've got the most efficient, on-the-job performance within your hands. That's because the KX71-3 delivers the largest digging depth and reach of all mini-excavators with a long arm in its weight category. Even with the long arm, it amazingly generates the largest power in its class for both arm and bucket digging. Furthermore, the KX71-3's lifting power is so strong. Together with a host of robust features that complete the package, making the KX71-3 the stand-alone leader in performance.



Digging arm and bucket

With the ability to deliver the most digging power, plus the efficiency of a long arm, the KX71-3 produces the largest digging depth of all long-arm mini-excavators*. Even with its long arm specification, the KX71-3 amazingly generates the biggest force for both arm and bucket digging*. Moreover, it has the ability to perform a wide range of tasks. (* In its class.)

Protected bucket cylinder hoses

To extend service life and improve visibility, the bucket cylinder hoses are well protected having been routed through the arm.

Boom cylinder protector

Thanks to a V-shaped thick plate, the boom cylinder is protected from unexpected damage caused by the breaker or other attachments, rocks, being loaded onto a truck, etc.

Well protected front attachment hoses

To prevent accidental damage of the front hoses, they are routed through the swing bracket. Also, a metal cover plate located at the back of the boom protects the operator subject to a hose burst.

Variable displacement pump

For efficient operation, both the oil flow and pressure are adjusted according to the workload by the variable displacement pumps. By utilizing variable pumps a more efficient engine is selected. This gives fuel efficiency, low vibration and noise level.

Swing bracket bushes

To enhance durability, we've adopted bushes at all fixing / pivot points.

Dozer cylinder hoses

Utilising a more efficient twopiece design, the KX71-3's dozer cylinder hoses can be quickly replaced on the spot.



Upgraded features to keep your performance up while keeping downtime down.

Deluxe cabin

To keep you operating longer, our larger cabin delivers maximum comfort. It provides more legroom, an adjustable suspension seat, a radio installation kit, plus excellent visibility. Both cabin and canopy offer the security of ROPS/FOPS.

Increased rear visibility

The KX71-3 has a 28 % reduiced overhang while maintaining the same level of stability as our conventional model. Now, KX71-3 offers increased rear visibility and easier operation in confined areas.

Low noise level

When designing the KX71-3, we kept a focus on being environmentally and operator friendly. Thus, the KX71-3's noise level in the cabin is an amazingly low 79 dB.

Double-opening bonnet

Both daily maintenance and repairs will become fast and easy with the double-opening bonnet. When both panels are opened, virtually all components are within quick reach.



Kubota V1505-EBH engine

The powerful and reliable Kubota V1505-EBH engine provides economical and environmentally clean power. The engine is so fuel efficient, a full tank gives 10 hours of continuous work.

Safety lock system


To prevent unexpected machine movement, the safety lever must be raised to lock out the travel levers and pilot controls before the engine will start.



Kubota Intelligent Control System

An innovative upgrade that always keeps you in tune with the KX71-3's vital signs. The Kubota Intelligent Control System is equipped with warning indicators for engine, fuel, temperature, and oil; a service mode that enables accurate troubleshooting; and standard indicators which display current working conditions such as engine rpm, hour meter, and more.

ED.





Boom swing / Auxiliary operation

For easier operation, the boom swing pedal and auxiliary hydraulic operations are controled by independent pedals—with one pedal located on the right side of the floor and the other on the left side.

2-speed travel switch

With the 2-speed travel switch re-located from the floor to the dozer lever, you'll enjoy enhanced dozer operation whenever changing travel speeds.

Wrist rest

With this new feature, to assist with smooth operation and create less operator fatigue, wrist rests are fitted as standard. Slight adjustments are easy to make, plus operation is smooth and less fatiguing.



Standard Equipment

Engine/Fuel system

- Double element air cleaner
- Electric fuel pump

Cabin

- ROPS (Roll-Over Protective Structure, ISO 3471)
- FOPS (Falling Objects Protective Structure) level 1
- Weight-adjustable full suspension seat
- Seatbelt
- Hydraulic pilot control levers with wrist rests
- Travel levers with foot pedals
- Cabin heater for defrosting & demisting
- Emergency exit hammer
- Front window power-assisted by 2 gas dampers
- 12 V power source for radio-stereo
 Location for 2 speakers and radio
- antenna

Undercarriage

- 300 mm rubber track
- 1 x upper track roller
- 3 x outer flange type lower track roller
- 2 speed travel switch on dozer lever

Canopy

- ROPS (Roll-Over Protective Structure, ISO 3471)
- FOPS (Falling Objects Protective Structure) level 1
- Weight-adjustable full suspension seat
- Seatbelt
- Hydraulic pilot control levers with wrist rests
- Travel levers with foot pedals

Hydraulic system

- Pressure accumulator
- Hydraulic pressure checking ports
- Straight travel circuit
- Third line hydraulic return

Safety system

- Engine start safety system on the left console
- Travel lock system on the left console
- Swivel lock system
- Boom anti-fall circuit in the control valve

Working equipment

- 1150 mm arm
- Auxiliary hydraulic circuit piping to the arm end
- 2 working lights on cabin and 1 light on the boom

Optional Equipment

Working equipment

• 1350 mm arm (long arm)

Undercarriage

• 300 mm steel track (+ 95 kg)

Cabin

• Radio/stereo installation kit


Safety system

- Warning buzzer
- Anti-theft device

SPECIFICATIONS

WORKING RANGE

								*Rubber shoe type		
Image: Canopy (Std. arm/Long arm) kg 2685/2695 Bucket ivith side teeth mith sold 0.07 Bucket with side teeth mm 505 with out side teeth mm 480 Model Type V1505-E2-BH-10EU Type PS/rpm 27.5/2300 Number of cylinders 4 Bore x stroke mm 78 x 78.4 Displacement cc 1498 Overall length (Std. arm/Long arm) mm 4520/4550 Overall keight Canopy mm 2430 Swivelling speed rpm 9.4 Rubber shoe width mm 1560 Dozer size (width x height) mm 1500 x 300 Flow rate e /min 32.2+32.2 Hydraulic pressure MPa(kgf/cm ²) 23.5 (240) pumps Flow rate e /min 18.4 Hydraulic pressure MPa(kgf/cm ²) 20.6 (210) Max. digging Flow rate e /min 18.4 Hydraulic	Maabiaa	La Ca	ıbin	(Std. arm/l	Long arm)	kg	2790/2800			
$ \begin{array}{ c c c c } \label{eq:barrier} \begin{tabular}{ c c c c c } \label{eq:barrier} \begin{tabular}{ c c c c c c c } \label{eq:barrier} \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	Machine		Canopy (Std. arm/Long arm) kg				2685/2695			
bucket widthwithout side teethmm480ModelV1505-E2-BH-10EUTypeWater-cooled, dissel engineOutput ISO9249PS/rpmNumber of vlinders4Bore x strokemmBore x strokemmDisplacementccOverall lengthCabinOverall heightCabinCabinmmCumber sizemmSwivelling speedrpmP1.P2Variable displacement pumpFlow ratel/minP1.P2Variable displacement pumpFlow ratel/minP1.P2Variable displacement pumpFlow ratel/minHydraulicpressureP1.P2Variable displacement pumpFlow ratel/minHydraulicressureP1.P2Variable displacement pumpFlow ratel/minRubler showMax. diggingFlow ratel/minMax. diggingressureMax. diggingressureMax. diggingFlow rateHydraulicressureMax. travellingLowMax. travellingLowMax. travellingLowAran (Std./Long)kR/kgf/cm²)SpeedCabinHighKm/hCanopyKPa(kgf/cm²)SpeedCabinKithoutStopSpeedCabinKithoutStopSpeedCabinKithoutKm/hSpeedCabin <td>Bucket o</td> <td>apaci</td> <td>ty, ste</td> <td>m³</td> <td colspan="2">0.07</td>	Bucket o	apaci	ty, ste	m ³	0.07					
	Bucket	with	side	tee	th	505				
$ \begin{array}{ c c c } \hline Type & Water-cooled, diseal engine \\ \hline PS/rpm & 27.5/2300 \\ \hline Wutput ISO9249 & WW/rpm & 20.5/2300 \\ \hline WW/rpm & 78 \times 78.4 \\ \hline Displacement & cc & 1498 \\ \hline Overall length (Std. arm/Long arm) & mm & 4520/4550 \\ \hline Overall height & \hline Cabin & mm & 2410 \\ \hline Caonopy & mm & 2430 \\ \hline Swivelling sped & rpm & 9.4 \\ \hline Rubber shoe width & mm & 3000 \\ \hline Tumbler distance & mm & 1560 \\ \hline Dozer size (width x height) & mm & 1500 \times 300 \\ \hline Under tistance & MPa(kgf/cm^2) & 23.5 (240) \\ \hline P3 & & Gear pump \\ \hline Flow rate & \ell/min & 18.4 \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Max. digging sped (left/right) & deg & 80/60 \\ \hline Auxiliary circus & \hline Flow rate & \ell/min & 50.6 \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Hydraulic ressure MPa$	width	with	out si	de	teeth		mm 480			
Engine Image: Control of the stress of the st		Mod	el			V1505-E2-BH-10EU				
Engine Output ISO9249 kW/rpm 20.5/2300 Number of cylinders 4 Bore x stroke mm 78 x 78.4 Displacement cc 1498 Overall length (Std. arm/Long arm) mm 4520/4550 Overall length teight Cabin mm 2410 Overall speed rpm 9.4 Rubber shoe width mm 300 Tumbler distance mm 1560 Dozer size (width x height) mm 1500 x 300 P1,P2 Variable displacement pump Flow rate ℓ/min 32.2+32.2 Hydraulic Pressure ℓ/min 32.2+32.2 Hydraulic ressure ℓ/min 32.2+32.2 Hydraulic Pressure ℓ/min 32.2+32.2 Hydraulic ressure ℓ/min 32.2+32.2 Hydraulic Flow rate ℓ/min 18.4 Hydraulic ressure ℓ/min 18.4 Hydraulic ressure ℓ/min 20.6	Fully	Туре				Water-cooled, diesel engine				
		Outr					rpm	27.5/2300		
	Engine	Output 1509249				kW/rpm		20.5/2300		
Displacementcc1498Overall length(Std. arm/Long arm)mm4520/4550Overall heightCabinmm2410Canopymm2430Swivelling speetrpm9.4Rubber shoewith xmm300Tumbler distancemm1560Dozer size(with x height)mm1500 x 300P1,P2Variable displacement pumpFlow rate ℓ/min 32.2+32.2HydraulicpressureMPa(kgf/cm ²)23.5 (240)P3Gear pumpFlow rate ℓ/min 18.4Hydraulic pressureMPa(kgf/cm ²)20.6 (210)Max. diggingForce $Arm (Std. /Long) kN (kgf)$ 17.5/16.2 (1790/1650)Boom swing aruleIef/right)deg80/60Auxiliary circuitFlow rate ℓ/min 50.6Hydraulic pressureMPa(kgf/cm ²)20.6 (210)Hydraulic ressureMPa(kgf/cm ²)20.6 (210)Hydraulic ressureKm/h2.7<		Num	ber o	f cy	/linders	4				
Overall length(Std. arm/Long arm)mm4520/4550Overall heightCabinmm2410Canopymm2430Swivelling speedrpm9.4Rubber shoewithmm300Tumbler distarcemm1560Dozer size(with x height)mm1500 x 300Max. diggingP1,P2Variable displacement pumpFlow rate ℓ/min 32.2+32.2Hydraulic pressureMPa(kgf/cm²)23.5 (240)P3Gear pumpFlow rate ℓ/min 18.4Hydraulic pressureMPa(kgf/cm²)20.6 (210)Max. diggingrefArm (Std. /Long) kN (kgf)17.5/16.2 (1790/1650)Boom swingsucketkN (kgf)25.2 (2570)Boom swingsucketkN (kgf)25.2 (2570)Auxiliary circuitFlow rate ℓ/min 50.6Hydraulic pressureMPa(kgf/cm²)20.6 (210)Hydraulic reserver ℓ 34Fuel tank cap i k SpeedHighkm/h4.6Ground contact pressureCabin k k Ground contact pressureCabin k </td <td></td> <td>Bore</td> <td>x str</td> <td>oke</td> <td>2</td> <td colspan="2">78 x 78.4</td>		Bore	x str	oke	2	78 x 78.4				
Overall heightCabinm2410Overall heightCanopymm2430Swivelling speedrpm9.4Rubber shoewidthmm300Tumbler distancemm1560Dozer size(width x height)mm1500 x 300Max. digging $P1,P2$ Variable displacement pumpFlow rate ℓ/min 32.2+32.2HydraulicpressureMPa(kgf/cm ²)23.5 (240)P3Gear pumpFlow rate ℓ/min 18.4Hydraulic pressureMPa(kgf/cm ²)20.6 (210)Max. digging forceArm (Std. /Long) kN (kgf)17.5/16.2 (1790/1650)Boom swing angle(left/right)deg80/60Auxiliary circuitFlow rate ℓ/min 50.6Hydraulic pressureMPa(kgf/cm ²)20.6 (210)Hydraulic reservoir ℓ 34Fuel tank capacity ℓ 45Max. travelling speedLowkm/h2.7Highkm/h4.6Ground contact pressureCabin $kPa(kgf/cm2)$ 26.5 (0.270)CanopykPa(kgf/cm ²)25.0 (0.255)		Displacement cc						1498		
Overall heightCanopymm2430Swivelling spedrpm9.4Rubber shoewidthmm300Tumbler distancemm1560Dozer size (width x height)mm1500 x 300Max. A digging $P1, P2$ Variable displacement pumpFlow rate ℓ/min 32.2+32.2Hydraulic pressure MPa(kgf/cm²)23.5 (240)P3Gear pumpFlow rate ℓ/min 18.4Hydraulic pressure MPa(kgf/cm²)20.6 (210)Max. digging forceArm (Std./Long) kN (kgf)17.5/16.2 (1790/1650)Boom swing angle (left/right)deg80/60Auxiliary circuitFlow rate ℓ/min 50.6Hydraulic pressure MPa(kgf/cm²)20.6 (210)Hydraulic reserver ℓ 34Fuel tank capacity ℓ 45Max. travelling speedLowkm/h2.7Highkm/h4.6Ground contact pressureCabin $kPa(kgf/cm²)$ 26.5 (0.270)CanopykPa(kgf/cm²)25.0 (0.255)	Overall length (Std. arm/Long arm) mm							4520/4550		
Canopy mm 2430 Swivelling speed rpm 9.4 Rubber shoe wird mm 300 Tumbler distance mm 1560 Dozer size (width x height) mm 1500 x 300 Partial flow x all ℓ/min 32.2+32.2 Hydraulic pressure ℓ/min 32.2+32.2 Hydraulic pressure $MPa(kgf/cm^2)$ 23.5 (240) P3 Gear pump flow rate ℓ/min 18.4 Hydraulic pressure MPa(kgf/cm^2) 20.6 (210) Max.4 Max. digging force ℓ/min 18.4 Hydraulic pressure MPa(kgf/cm ²) 20.6 (210) Max. digging force ℓ/min 16.2 (1790/1650) Boom swing argle left/right) deg 80/60 Auxiliary circuit flow rate ℓ/min 50.6 Hydraulic ressure MPa(kgf/cm ²) 20.6 (210) Hydraulic ressure MPa(kgf/cm ²) 20.6 (210) Hy	Overall	hoigh		Cabin mr			mm	2410		
Rubber shoe widthmm300Tumbler distancemm1560Dozer size (width x height)mm1500 x 300Dozer size (width x height)mm1500 x 300P1,P2Variable displacement pumpFlow rate ℓ/min 32.2+32.2Hydraulic pressure MPa(kgf/cm²)23.5 (240)P3Gear pumpFlow rate ℓ/min 18.4Hydraulic pressure MPa(kgf/cm²)20.6 (210)Max. digging forceArm (Std. /Long) kN (kgf)17.5/16.2 (1790/1650)Boom swing angle (left/right)deg80/60Auxiliary circuitFlow rate ℓ/min 50.6Hydraulic pressure MPa(kgf/cm²)20.6 (210)Hydraulic reserver ℓ 34Fuel tank capacity ℓ 45Max. travelling speedLowkm/h2.7Highkm/h4.6Ground contact pressureCabin $kPa(kgf/cm²)$ 26.5 (0.270)CanopykPa(kgf/cm²)25.0 (0.255)	Overain	۲ آ	Cai	пору	mm		2430			
Tumbler distancemm1560Dozer size (width x height)mm1560Dozer size (width x height)mm1560Dozer size (width x height)mm1560Dozer size (width x height)mm1560PI,P2Variable displacement pumpFlow rate $\ell/min32.2:430.P3Gear pumpFlow rate\ell/min33.5 (240)P3Gear pumpFlow rate\ell/min33.5 (240)P3Gear pumpFlow rate\ell/min18.4Hydraulic pressure MPa(kgf/cm²)20.6 (210)Max. digging force\ell/minS0.6Arm (Std. /Long) kN (kgf)17.5/16.2 (1790/1650)BucketkN (kgf)20.6 (210)Hydraulic pressure MPa(kgf/cm²)20.6 (210)Hydraulic ressure\ell/minS0.6Auxiliary circli fFlow rate\ell/minS0.6Auxiliary circli fFlow rate\ell/minS0.6Max. travelling$	Swivellin	ng spe	eed			rpm		9.4		
Turnster urstanceDozer size (width x height)mDozer size (width x height)m1500 x 300P1,P2Variable displacement pumpFlow rate $\ell /minHydraulic pressure MPa(kgf/cm2)23.5 (240)P3Gear pumpFlow rate\ell /min18.4Hydraulic pressure MPa(kgf/cm2)20.6 (210)Max. digging forceArm (Std. /Long) kN (kgf)17.5/16.2 (1790/1650)Boom swing angle (lef/right)deg80/60Auxiliary circuitFlow rate\ell /min50.6Hydraulic pressure MPa(kgf/cm2)20.6 (210)Hydraulic pressure MPa(kgf/cm2)20.6 (210)Hydraulic reservoir\ell34Flow rate\ell /min50.6Auxiliary circuitFlow rate\ell /min50.6Hydraulic pressure MPa(kgf/cm2)20.6 (210)Hydraulic reservoir\ell34Flow rate\ell /min50.6Auxiliary circuitFlow rate\ell /min50.6$	Rubber	shoe	width	300						
$\begin{array}{c c c c c c } & & & & & & & & & & & & & & & & & & &$	Tumbler	r dista	nce	1560						
$\begin{array}{c c c c c c } Hydraulic & e & e & e & e & e & e & e & e & e & $	Dozer si	ize (w	idth >	1500 x 300						
$\begin{array}{ c c c c c } Hydraulic pressure MPa(kgf/cm^2) & 23.5 (240) \\ \hline P3 & Gear pump \\ \hline Flow rate & \ell/min & 18.4 \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Max. digging force & Arm (Std. /Long) kN (kgf) & 17.5/16.2 (1790/1650) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Boom swing angle (left/right) & deg & 80/60 \\ \hline Auxiliary circult & Flow rate & \ell/min & 50.6 \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Hydraulic ressure & MPa(kgf/cm^2) & 25.0 (0.255) \\ \hline \hline Hydraulic ressure & MPa(kgf/cm^2) & 25.0 (0.255) \\ \hline \hline Hydraulic ressure & MPa(kgf/cm^2) & 25.0 \\ \hline Hydraulic res$		Р	1,P2				Variable displacement pur			
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		F	low r	ate		32.2+32.2				
$\begin{tabular}{ c c c c c } \hline Flow rate & \ell/min & 18.4 \\ \hline Flow rate & \ell/min & 18.4 \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Max. digging force & Arm (Std. /Long) kN (kgf) & 17.5/16.2 (1790/1650) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Bucket & kN (kgf) & 25.2 (2570) \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Hydraulic pressure MPa(kgf/cm^2) & 20.6 (210) \\ \hline Hydraulic reservoir & \ell & 34 \\ \hline Fuel tank capacity & \ell & 45 \\ \hline Max. travelling speed & Low & km/h & 2.7 \\ \hline High & km/h & 4.6 \\ \hline Ground contact pressure & Cabin & kPa(kgf/cm^2) & 26.5 (0.270) \\ \hline Canopy & kPa(kgf/cm^2) & 25.0 (0.255) \\ \hline \end{tabular}$	Hydraul	ic H	lydrau	ılic	pressure	23.5 (240)				
	pumps	Р	3				Gear pump			
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		F	low r	ate		l,	/min	18.4		
Max. digging force Bucket kN (kgf) 25.2 (2570) Boom swing angle (left/right) deg 80/60 Auxiliary circuit Flow rate l/min 50.6 Hydraulic pressure MPa(kgf/cm²) 20.6 (210) Hydraulic reservoir l 34 Fuel tank capacity l 45 Max. travelling speed Low km/h 2.7 High km/h 4.6 26.5 (0.270) Ground contact pressure Cabin kPa(kgf/cm²) 26.5 (0.270) Canopy kPa(kgf/cm²) 25.0 (0.255) 25.0 (0.255)		Н	Hydraulic pressure MPa(kgf/cm ²)					20.6 (210)		
Bucket kN (kgf) 25.2 (2570) Boom swing angle (left/right) deg 80/60 Auxiliary circuit Flow rate ℓ /min 50.6 Hydraulic pressure MPa(kgf/cm ²) 20.6 (210) Hydraulic reservoir ℓ 34 Fuel tank capacity ℓ 45 Max. travelling speed Low km/h 2.7 High km/h 4.6 26.5 (0.270) Ground contact pressure Cabin kPa(kgf/cm ²) 26.5 (0.270) Canopy kPa(kgf/cm ²) 25.0 (0.255) 25.0 (0.255)	Max dia		force	A	.rm (Std. /L	ong) kN	(kgf)	17.5/16.2 (1790/1650)		
Auxiliary circuit Flow rate ℓ/min 50.6 Hydraulic pressure MPa(kgf/cm²) 20.6 (210) Hydraulic reservoir ℓ 34 Fuel tank capacity ℓ 45 Max. travelling speed Low km/h 2.7 High km/h 4.6 26.5 (0.270) Ground contact pressure Cabin kPa(kgf/cm²) 26.5 (0.270) Canopy kPa(kgf/cm²) 25.0 (0.255) 25.0 (0.255)				В	Bucket kN (kgf)			25.2 (2570)		
Auxiliary circuit Heat and the second s	Boom swing angle (left				eft/right) deg		deg	80/60		
Hydraulic pressure MPa(kgf/cm²) 20.6 (210) Hydraulic rues 34 Fuel tank capacity 45 Max. travelling speed Low km/h 2.7 High km/h 4.6 Ground contact pressure Cabin kPa(kgf/cm²) 26.5 (0.270) Canopy kPa(kgf/cm²) 25.0 (0.255) 25.0 (0.255)	Auxiliary circuit			ow rate ℓ /min				50.6		
Fuel tank capacity ℓ 45 Max. travelling speed Low km/h 2.7 High km/h 4.6 Ground contact pressure Cabin kPa(kgf/cm²) 26.5 (0.270) Canopy kPa(kgf/cm²) 25.0 (0.255)				draulic pressure MPa(kgf/cm²)			′cm²)	20.6 (210)		
Max. travelling speed Low km/h 2.7 High km/h 4.6 Ground contact pressure Cabin kPa(kgf/cm ²) 26.5 (0.270) Canopy kPa(kgf/cm ²) 25.0 (0.255)	Hydraul	ic rese	ervoir	34						
Kmkk: rukering High km/h 4.6 Ground contact pressure Cabin kPa(kgf/cm ²) 26.5 (0.270) Canopy kPa(kgf/cm ²) 25.0 (0.255)	Fuel tan	k cap	acity	45						
speed High km/h 4.6 Ground contact pressure Cabin kPa(kgf/cm ²) 26.5 (0.270) Canopy kPa(kgf/cm ²) 25.0 (0.255)	Max. travelling Lc					km/h		2.7		
Ground contact pressure Canopy kPa(kgf/cm ²) 25.0 (0.255)			ı		km/h		4.6			
Canopy kPa(kgf/cm ²) 25.0 (0.255)	Cround contact pro-				Cabin kPa(kgf/cm		′cm²)	26.5 (0.270)		
Ground clearance mm 305	Ground c	ontact	press	ure	Canopy kPa(kgf/cm²)		′cm²)	25.0 (0.255)		
	Ground	cleara	ince				mm	305		

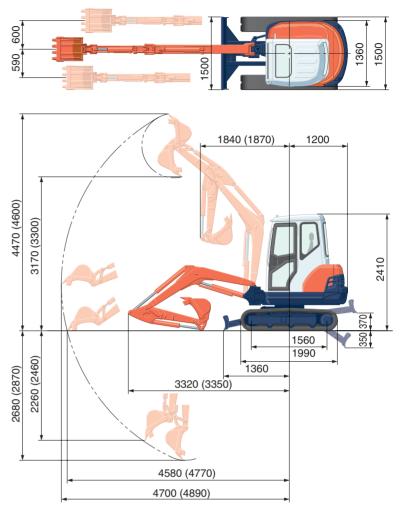


(): Long Arm Unit: mm

LIFTING CAPACITY

KX71-3(C/	KX71-3(CAB) with standard arm: kN (ton													
Lift Point Height	Lifting	point radius	(2.5m)	Lifting point radius (3.5m)										
	Over-	front	Overside	Over	Overside									
	Blade Down	Blade UP	Over-side	Blade Down	Blade UP	Over-side								
2.0m	7.20 (0.73)	7.20 (0.73)	7.20 (0.73)	5.89 (0.60)	5.81 (0.59)	5.09 (0.52)								
1.5m	8.95 (0.91)	8.95 (0.91)	8.15 (0.83)	6.32 (0.64)	5.72 (0.58)	5.00 (0.51)								
1.0m	10.57 (1.08)	9.18 (0.94)	7.90 (0.81)	6.80 (0.69)	5.62 (0.57)	4.91 (0.50)								
0m	11.79 (1.20)	8.88 (0.91)	7.57 (0.77)	7.29 (0.74)	5.49 (0.56)	4.78 (0.49)								
KX71-3(CA	KX71-3(CAB) with long arm: kN (ton)													
	Lifting	point radius	(2.5m)	Lifting point radius (3.5m)										
Lift Point Height	Over-	front	0	Over	Overside									
	Blade Down	Blade UP	Over-side	Blade Down	Blade UP	Over-side								
2.0m	6.38 (0.65)	6.38 (0.65)	6.38 (0.65)	5.45 (0.56)	5.45 (0.56)	5.10 (0.52)								
1.5m	8.10 (0.83)	8.10 (0.83)	8.10 (0.83)	5.94 (0.61)	5.72 (0.58)	5.00 (0.51)								
1.0m	9.86 (1.01)	9.20 (0.94)	7.87 (0.80)	6.48 (0.66)	5.60 (0.57)	4.88 (0.50)								
0m	11.64 (1.19)	8.79 (0.90)	7.49 (0.76)	7.18 (0.73)	5.43 (0.55)	4.72 (0.48)								

Please note:

The lifting capacities are based on ISO 10567 and do not exceed 75 % of the static tilt load of the machine or 87 % of the hydraulic lifting capacity of the machine.
 * The excavator bucket, hook, sling and other lifting accessories are not included on this table.

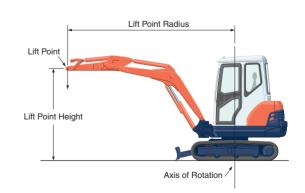

* Working ranges are with Kubota standard bucket, without quick coupler. *Specifications are subject to change without notice for purpose of improvement.

KUBOTA (U.K.) LTD Dormer Road, Thame Oxfordshire, OX93UN, U.K. Phone : 01844-268140 F a x : 01844-216685