




COMANSA

LINDEN 500

5 LC 4010

5 t

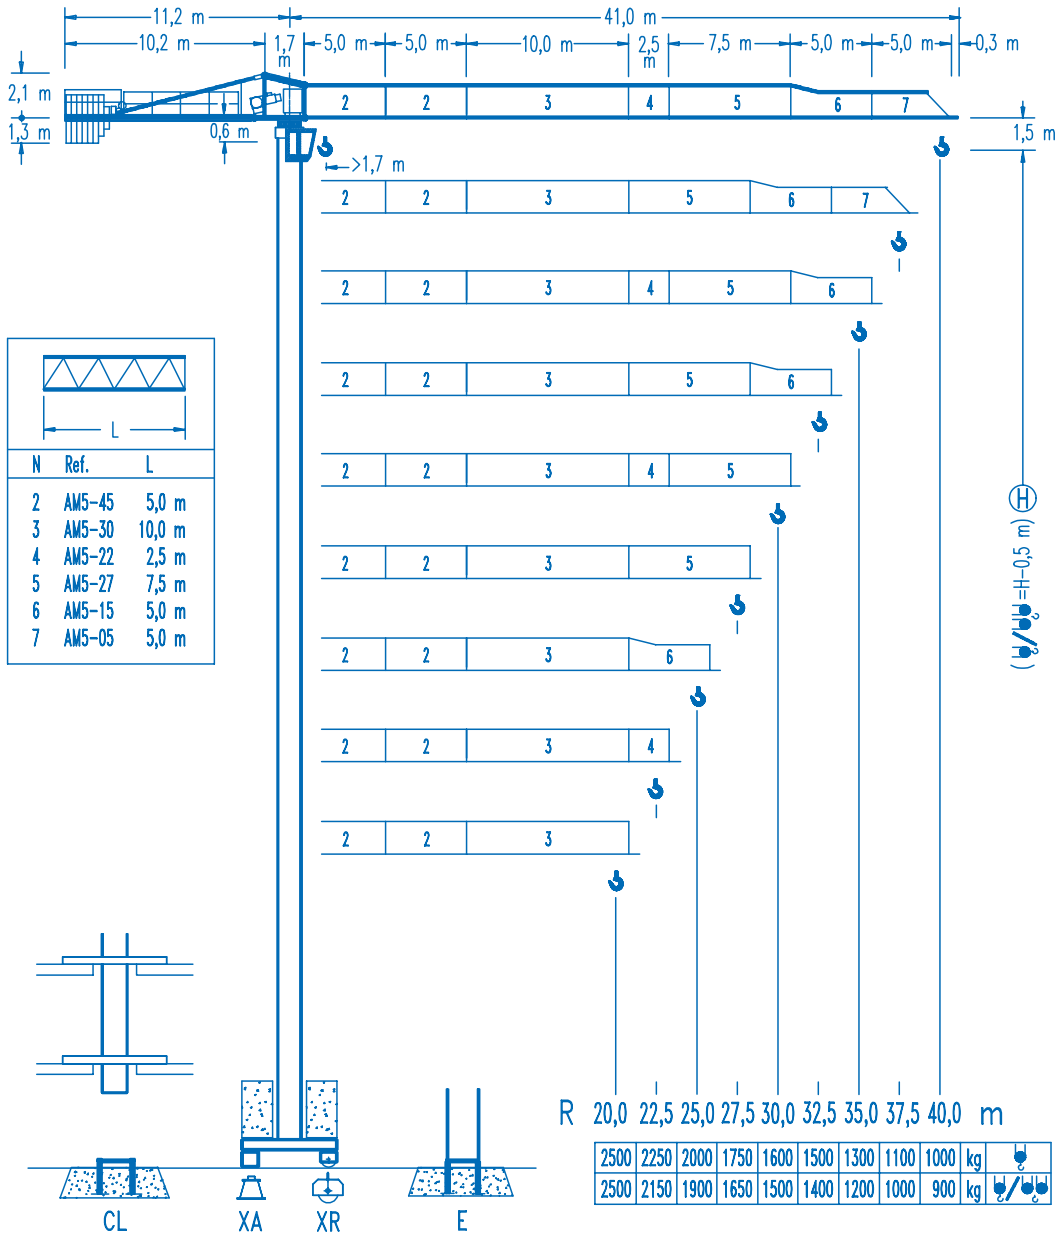



CE
DIN 15018 H1 B3

R	R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	
40,0		18,3 m	2500	2260	1980	1750	1570	1420	1290	1180	1080	1000
		9,9 m	5000	2200	1910	1680	1490	1330	1200	1080	990	900
37,5		18,6 m	2500	2300	2010	1780	1590	1440	1310	1200	1100	
		10,0 m	5000	2230	1930	1700	1510	1350	1210	1100	1000	
35,0		19,9 m	2500	2480	2170	1930	1730	1560	1420	1300		
		10,7 m	5000	2410	2090	1840	1640	1470	1320	1200		
32,5		20,8 m	2500	2500	2290	2030	1820	1650	1500			
		11,1 m	5000	2540	2210	1940	1730	1550	1400			
30,0		20,3 m	2500	2500	2230	1970	1770	1600				
		10,8 m	5000	2460	2140	1880	1670	1500				
27,5		20,1 m	2500	2500	2200	1950	1750					
		10,7 m	5000	2430	2110	1860	1650					
25,0		20,5 m	2500	2500	2260	2000						
		10,9 m	5000	2480	2160	1900						
22,5		20,5 m	2500	2500	2250							
		10,9 m	5000	2470	2150							
20,0		20,0 m	2500	2500								
		11,0 m	5000	2500								

DS.0541.08




10/05 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

Courtesy of Crane.Market

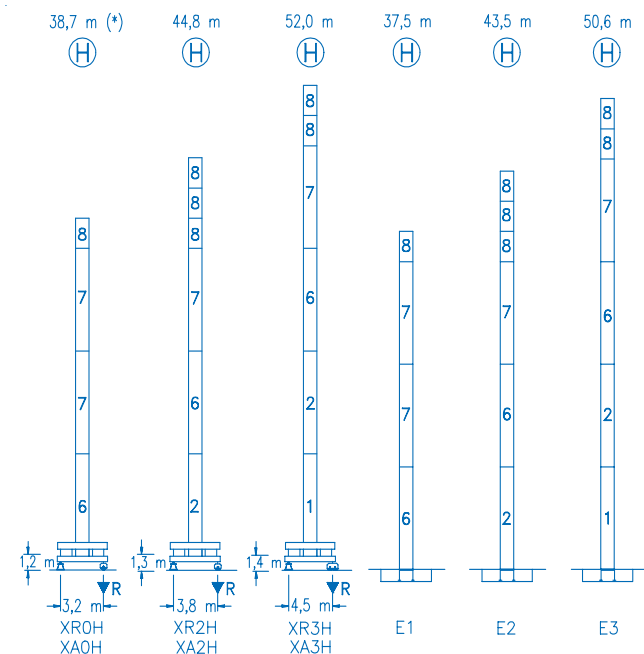

N	Ref.	h
1	MT123	10,1 m
2	MH124A	11,8 m
4	MH121	3,0 m
5	MH121A	3,0 m
6	MH114A	11,8 m
7	MH114	11,8 m
8	MH111	3,0 m
9	CL20	2,2 m

MH114=(4)MH111-0,2 m

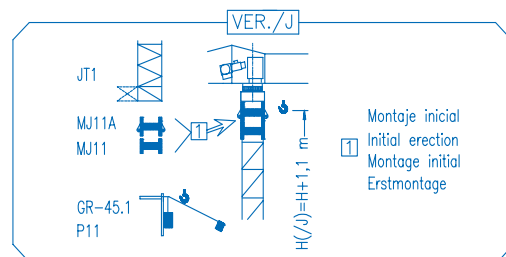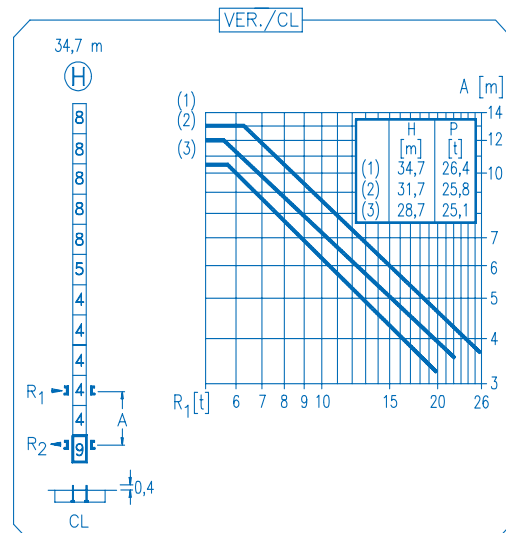

(*) SIN CAB. - CAB. NO. - SANS CAB. - KAB. NEIN.

R. máx.	En servicio	XR0H 40,3 t
	In operation	XR2H 44,4 t
	En service	XR3H 46,7 t
	In Betrieb	

R. máx.	Fuera de servicio	XR0H 58,6 t
	Out of service	XR2H 72,5 t
	Hors service	XR3H 80,9 t
	Ausser Betrieb	

CS2-1.9
1,9 kW
16 m/min
48 m/min

CFU-2.2
2,2 kW
0 ⇄ 80 m/min

GR-6.5
65 Nm
0 ⇄ 0,8 rpm

TS2-3.0	TS2-4.5	TS2-5.5
2x30 Nm	2x45 Nm	2x55 Nm
0 ⇄ 20 m/min		
XR0H	XR2H	XR3H

ES3-18-12
18 kW

	I	II	III
m/min	8	32	64
kg	2500	2500	1300
m/min	4	16	32
kg	5000	5000	2600

ES3-13-12
13,2 kW

	I	II	III
m/min	6	24	48
kg	2500	2500	1300
m/min	3	12	24
kg	5000	5000	2600

EFU2-18-12
18 kW

EFU2-11-12
11 kW

Tensión de alimentación	400 V
Operating voltage	3 ph
Tension de service	50 Hz
Betriebsspannung	

Opcional
Optional
En option
Kaufoption