
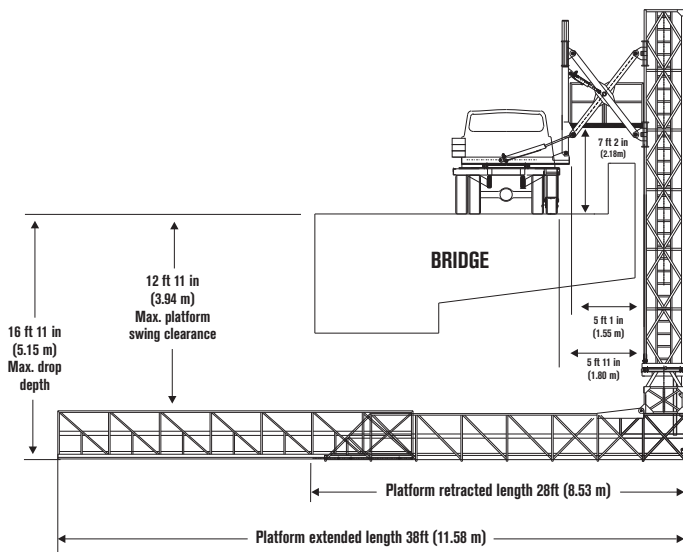



# SPECIFICATIONS

## MEASUREMENTS US METRIC

Platform Length	38 ft	11.50 m
Platform Width - I.D. Alum.	2 ft 7 in	0.78 m
- I.D. Steel	3 ft 1 in	0.94 m
Platform Weight Capacity	1,000 lbs	455 kg
Vertical Height Clearance (max.)	6 ft 11 in	2.10 m
Max. Lowering Depth	16 ft 11 in	5.15 m
Platform Rotation	180°	180°
Tower Separation Width (max.)	5ft 1 in	1.55 m
Unit Length (transport pos.)	32 ft	9.75 m
Unit Width (transport pos.)	8 ft 4 in	2.54 m
Unit Height (transport pos.)	11 ft 6 in	3.50 m
Total Weight (approximate)	<26,001 lbs	<11,793 kg
Maximum grade - 5% (3 degrees)		
Maximum super elevation - 8% (4.5 degrees)		
Standards Compliance - ANSI A92.8		

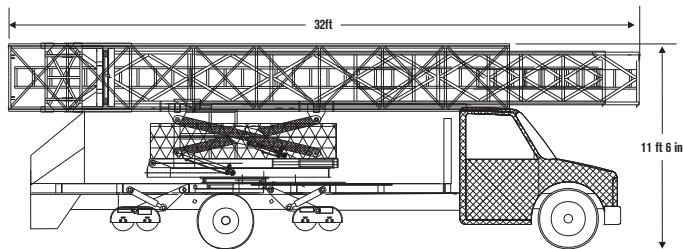

# HPT 11/38 HYDRA PLATFORMS

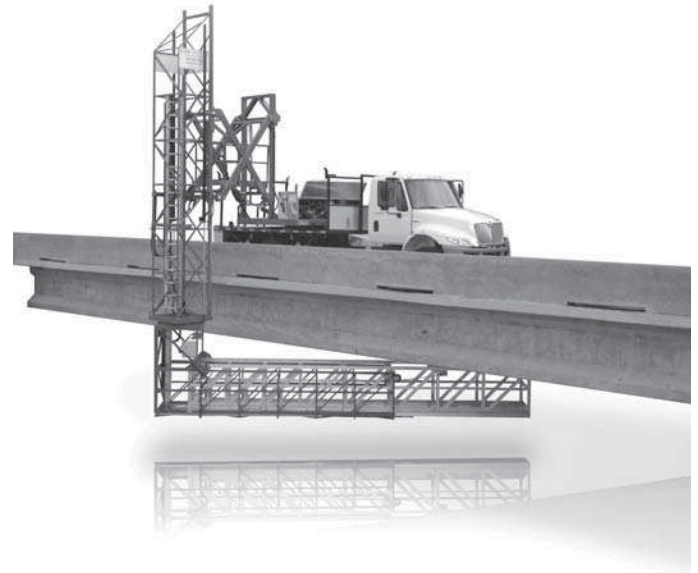

## DESCRIPTION

The Terex Hydra Platforms truck-mounted model HPT 11/38 is a comprehensively equipped underbridge access and work platform. The GVWR is <26,000lbs, so a Commercial Driver's License is not required for operation in the United States. Like all Terex Hydra Platform models the HPT 11/38 features 180 degree platform rotation providing access to 1,400 square feet of under-bridge area from a fixed point on the bridge deck. Versatility is increased by the hydra static drive which allows bridge deck propulsion during platform use. Terex Hydra Platforms models utilize the patented Tower Separation System, comprised of hydraulically adjustable cross-linking arms between vertical tower and the turntable sub-frame. This system enables operators to erect and extend the tower and platform over sidewalks and other barriers without restricting the under-bridge operations. These features and more are part of the commitment of Terex Hydra Platforms to provide the utmost in safety and quality.

## FEATURES

Main hydraulic system: 18 HP V-Twin gasoline engine with auto idle

Auxiliary hydraulic backup system: Truck engine P.T.O.

Electric over hydraulic control panels: deck, platform, & handheld

180° platform rotation

±5° Tower adjustment for super elevation

Voice activated communication system, platform to bridge deck and truck cab

Single lane 5 minute deployment

Self-propelled by hydrostatic drive

Patented Tower Separation System

1,000 lbs (455 kg) platform capacity

38 ft (11.5 m) platform length

Access crossover to tower remains horizontal at all times for personnel safety



WORKS FOR YOU.™

[www.genielift.com](http://www.genielift.com)

Effective Date: February, 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. © 2012 Terex Corporation. HPT1138 Part #109XXX

Terex Hydra Platforms  
1205 Galleria Blvd  
Rockhill, SC 29730  
800-536-1800

Distributed By:



**WORKS FOR YOU.™**

*Courtesy of Crane.Market*