### **Speed Level**

Upright eladel

AIGH SI20

1.00 .112

UpRight susces

## Upright POWERED ACCESS

- O Working height up to 11m
- Automatic platform levelling on slopes or uneven ground
- Rough terrain features include 4WD, oscillating front axle, high grip tyres
- 19°/35% gradeability
- Proportional drive/lift controls for smooth precise operation
- Diesel power

# SL26SL SL30SL

## SL26/30SL speed level specifications

	SL26SL	SL30SL
max. working height <b>A</b>	10.0m	11.0m
max. platform height <b>B</b>	8.0m	9.0m
max. drive height	8.0m	9.0m
platform capacity (SWL)	680kg	590kg
platform size (inside guardrails)	1.72m x 3.66m	1.72m x 4.23m
platform size (with deck extended)	1.72m x 4.23m	n/a
s towed height <b>C</b>	2.6m	2.6m
stowed length <b>D</b>	3.79m	4.39m
width E	2.13m	2.13m
wheelbase <b>F</b>	2.54m	2.54m
height (guardrails folded)	1.1m	1.1m
gross weight	3,150kg	3,216kg
drive speed - max with platform raised	5.0km/h 0.8km/h	5.0km/h 0.8km/h
gradeability	19°/35%	19°/35%
inside turning radius	3.9m	3.9m
axle ground clearance	200mm	200mm
chassis ground clearance	320mm	320mm
lift speed - raise/lower	21/32 sec	24/36 sec
drive system	four wheel with hydraulic motors	
platform levelling	13° to either side; 9° fore and aft	
tyres	26 x 12.00 - 12 NHS. Super Terra-Grip, poly-filled	
parking brake	s pring-applied/ hydraulically-released, multiple disc	
control system	proportional, joystick controller with thumb rocker steering. Automatic levelling control (inoperable above interlock height)	
power source	Perkins diesel, water cooled engine	

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.



All models have
oscillating axles to
keep drive wheels in
contact with uneven
ground and have high
levels of gradeability
for tough sites and
loading ramps.

standard features Diesel power Descent alarm Hour meter Speed level - automatic powered platform levelling Oscillating front axle Poly-filled high grip tyres Dual multi-disc brakes One-hand, proportional controls Wired for AC outlet on platform Fold-down guardrails 1 year parts and labour warranty 5 year structural warranty options All motion alarm Flashing amber beacon and horn


- Diesel exhaust scrubber
- Special paint colours

Α

E

BP1. SL26/30SL 10/06

Environmental green oil

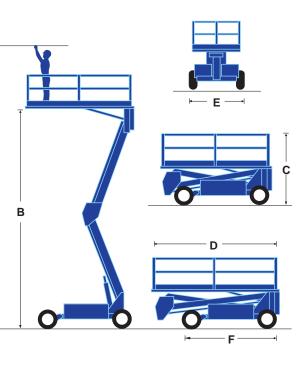

This product is available with the CE mark

confirming compliance with all relevant

European Machinery Directives



<b>UpRight</b>	Vigo Centre, Birtley Road, Washington,
<b>POWERED ACCESS</b>	Tyne & Wear, NE38 9DA, U.K.

Scles Tel: + 44 (0) 845 1550 057 • Spare Parts Tel: + 44 (0) 845 1550 058

#### www.upright.com