

UpRight
UL25/32/40

personnel lifts
telescopic mast

Patented Girder Lock
telescopic mast system
feels solid and sturdy

Ground level entry

Choice of platform heights

Small footprint allows
set up in narrow aisles,
tight spaces

Fast set-up increases
productivity

EZ Loader system for
transporting by pick-up
truck

Tilt-back system allows
passage through
standard doorways

AC or DC power

Five year
structural warranty



specifications	UL25	UL32	UL40
working height (A)	9.6m. (31ft.)**	11.72m. (38ft.)**	14.15m. (46ft.)**
platform height - (max.) (B)	7.6m. (25ft.)	9.72m. (32ft.)	12.15m. (40ft.)
platform height - (lowered) (C)	n/a	n/a	n/a
platform capacity	159kg. (350lbs.)	136kg. (300lbs.)	136kg. (300lbs.)
platform size	0.56m. x 0.66m. (22ins. x 26ins.)	0.56m. x 0.66m. (22ins. x 26ins.)	0.56m. x 0.66m. (22ins. x 26ins.)
stowed dimensions: width (G)	0.74m. (29ins.)	0.74m. (29ins.)	0.74m. (29ins.)
height (C)	1.98m. (78ins.)	2.53m. (99.5ins.)	2.90m. (114ins.)
length (D)	1.26m. (49.5ins.)	1.32m. (52.5ins.)	1.32m. (52.5ins.)
tilted back: height (E)	1.90m. (74.75ins.)	1.85m. (72.75ins.)	2.00m. (79ins.)
length (F)	2.59m. (102ins.)	(107ins.) 2.72m.	3.05m. (120ins.)
outrigger footprint width x length (J x H)	1.50m. x 1.43m. (59ins. x 56ins.)	2.06m. x 1.99m. (81ins. x 78ins.)	2.34m. x 2.26m. (92ins. x 89ins.)
wall / corner access	n/a	n/a	n/a
wall access - distance from front of platform to wall	102mm. (4ins.)	356mm. (14ins.)	508mm. (20ins.)
weights: AC	349kg. (770*lbs.)	417kg. (920lbs.)	449kg. (990lbs.)
weights: DC	367kg. (810*lbs.)	435kg. (960lbs.)	467kg. (1,030lbs.)
guardrail height	1.1m. (43.5ins.)	1.1m. (43.5ins.)	1.1m. (43.5ins.)
toeboard height	152mm. (6ins.)	152mm. (6ins.)	152mm. (6ins.)
power source	AC electric motor 1 hp single phase 110/220V, 50/60Hz DC electric motor 12V battery, Grp.27 105 amp/hours		
battery charger	Automatic 110V, 60Hz	Automatic 110V, 60Hz	Automatic 110V, 60Hz

*AC with tilt back 381kg. (840 lbs.) ; DC w/tilt back 399kg. (880 lbs.)

**Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.


Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

- Tiltback mechanism
(UL 32/40 models only)
- Outrigger interlock indicators
- Power to platform
- Integrated battery charger
(DC only)
- 1 year parts/service
- 5 year structural warranty

options

- Laser locator
- Power to platform
- Canvas bag for fluorescent tubes
- Tool tray
- Narrow cage
- Short cage
- Auditorium kit
- Special paint colours
- Environmental green oil

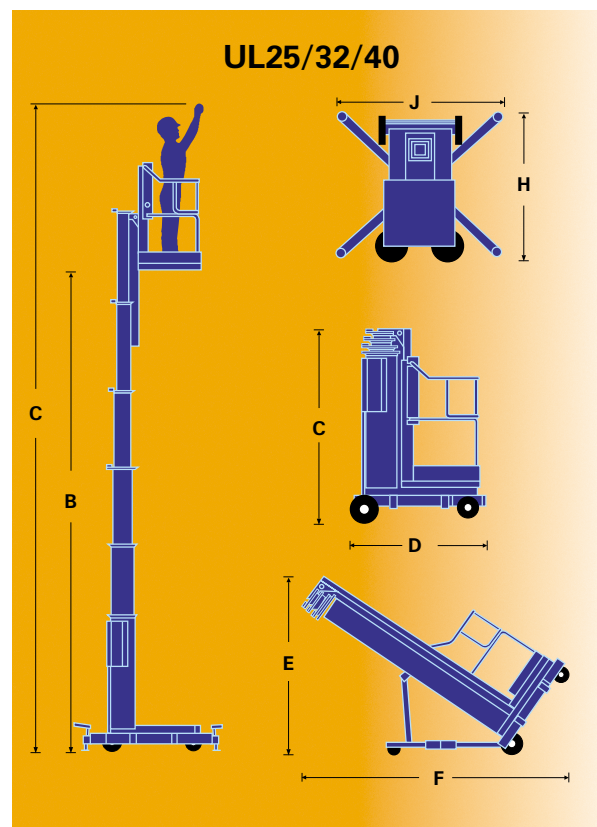

manufactured by

UpRight

Meets or exceeds applicable requirements of OSHA and ANSI A92.3 - 1990.



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel + (800) 926 5438
Fax + (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel + (800) 926 5438
Fax + (559) 673 6184

Europe/Africa/M. East
Tel + 353 1 620 9300
Fax + 353 1 620 9301

Southern Europe
Tel + 34 91 849 37 41
Fax + 34 91 849 37 41

Germany
Tel + 49 221 1706527
Fax + 49 221 1706536

UK
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

Singapore
Tel + 65 225 1322
Fax + 65 225 5157

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

web: www.upright.com

e-mail: marketing@upright.com