



VERSA-LIFT 17/25

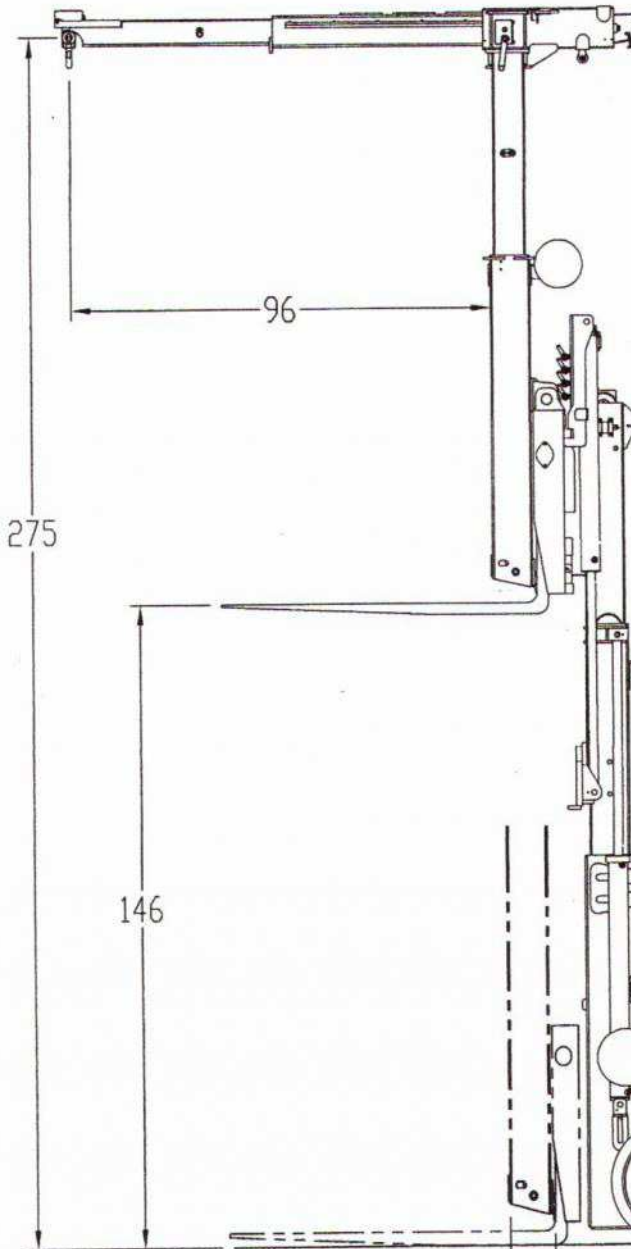

ENGINE: GM 3.0L
 DRIVE SYSTEM: 2 SPEED HYDROSTATIC
 TIRES: FRONT 28 X 12 NONMARKING POLY
 REAR 22 X 8 NONMARKING POLY
 GRADE: EMPTY %
 LOADED %
 TILT: FOWARD 10°, BACK 4.5°
 WEIGHTS: GROSS 30,500 LBS WITH
 BOOM & FORKS
 FORKS 1,000 LBS
 BOOM 2,700 LBS
 STAND 400 LBS
 TURNING RADIUS: 105" RETRACTED
 135" EXTENDED

PATENT PENDING

146

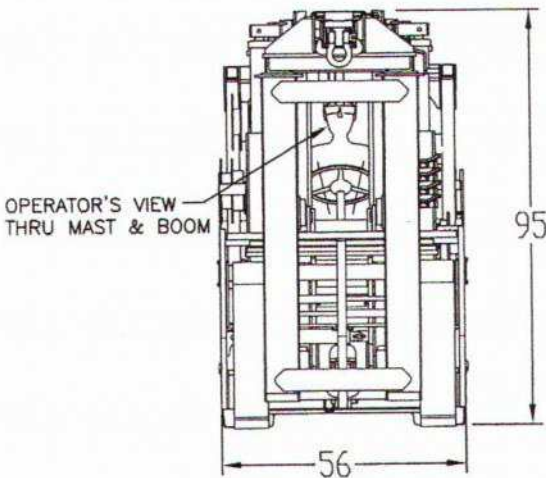

OPERATOR'S VIEW
 THRU MAST & BOOM

LIFT CAPACITIES* WITH FORKS & WITHOUT BOOM				
LOAD CENTER FROM FORK FACE	COUNTERWEIGHT EXTENSION			
	0"	12"	24"	36"
24"	18700#	20800#	22900#	25000#
36"	15100#	16800#	18500#	20200#
48"	12600#	14100#	15500#	16900#
60"	10900#	12100#	13300#	14600#
72"	9500#	10600#	11700#	12800#
84"	8500#	9500#	10400#	11400#

LIFT CAPACITIES* WITH BOOM & WITHOUT FORKS				
LOAD CENTER FROM BOOM FACE	COUNTERWEIGHT EXTENSION			
	0"	12"	24"	36"
12"	19100#	21300#	23500#	25800#
24"	15200#	17000#	18700#	20500#
36"	12600#	14000#	15500#	17000#
48"	10700#	11900#	13200#	14500#
60"	9300#	10400#	11500#	12600#
72"	8200#	9200#	10200#	11200#
84"	7300#	8300#	9100#	10000#
96"	6600#	7500#	8300#	9100#

* CAPACITIES RATED WITH MAST VERTICAL.

CUSTOM MOBILE EQUIPMENT, INC.

439 EAST HIGH STREET, BALDWIN CITY, KS 66006 (785) 594-7474 FAX (785) 594-7475

17/25 Versa-Lift with 3 Counterweight Slabs

Slab Weight (lbs)

1500

Number of Slabs

3

Standard Wheel Base (in)

72

Lift Capacities w/Forks Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Fork Face (in)	24	18700	20800	22900	25000
	36	15100	16800	18500	20200
	48	12600	14100	15500	16900
	60	10900	12100	13300	14600
	72	9500	10600	11700	12800
	84	8500	9500	10400	11400

Lift Capacities w/Forks & Boom (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	18400	20600	22800	25000
	24	14600	16400	18100	19900
	36	12100	13600	15000	16500
	48	10300	11500	12800	14100
	60	8900	10000	11100	12200
	72	7800	8900	9900	10800
	84	7000	8000	8900	9700
	96	6400	7200	8000	8800

Lift Capacities w/Boom Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	19100	21300	23500	25800
	24	15200	17000	18700	20500
	36	12600	14000	15500	17000
	48	10700	11900	13200	14500
	60	9300	10400	11500	12600
	72	8200	9200	10200	11200
	84	7300	8300	9100	10000
	96	6600	7500	8300	9100

****All Load Capacities are rated with the mast vertical.*

17/25 Versa-Lift with 2 Counterweight Slabs

Slab Weight (lbs)

1500

Number of Slabs

2

Standard Wheel Base (in)

72

Lift Capacities w/Forks Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
		Load Center From Fork Face (in)	24	17000	18900
36	13700	15200	16700	18200	
48	11500	12800	14000	15300	
60	9900	11000	12100	13100	
72	8700	9600	10600	11500	
84	7700	8600	9400	10300	

Lift Capacities w/Forks & Boom (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
		Load Center From Boom Face (in)	12	16400	18300
24	12900	14500	16000	17500	
36	10700	12000	13200	14500	
48	9100	10200	11300	12400	
60	7900	8800	9800	10700	
72	7000	7800	8700	9500	
84	6300	7000	7800	8600	
96	5700	6400	7100	7800	

Lift Capacities w/Boom Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
		Load Center From Boom Face (in)	12	17100	19000
24	13500	15100	16600	18100	
36	11200	12500	13700	15000	
48	9500	10600	11700	12800	
60	8200	9200	10200	11100	
72	7300	8200	9000	9900	
84	6500	7300	8100	8800	
96	5900	6600	7300	8000	

***All Load Capacities are rated with the mast vertical.

17/25 Versa-Lift with 1 Counterweight Slabs

<u>Slab Weight (lbs)</u>	<u>Number of Slabs</u>	<u>Standard Wheel Base (in)</u>
1500	1	72

Lift Capacities w/Forks Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
		Load Center From Fork Face (in)	24	15000	16600
36	12100		13400	14600	15900
48	10100		11200	12300	13300
60	8700		9600	10600	11500
72	7700		8500	9300	10100
84	6800		7500	8300	9000

Lift Capacities w/Forks & Boom (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
		Load Center From Boom Face (in)	12	14300	15900
24	11300		12600	13900	15200
36	9300		10400	11500	12600
48	7900		8800	9800	10700
60	6800		7600	8500	9300
72	6100		6800	7500	8200
84	5400		6100	6700	7400
96	4900		5500	6100	6700

Lift Capacities w/Boom Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
		Load Center From Boom Face (in)	12	15000	16600
24	11900		13200	14500	15800
36	9800		10900	12000	13000
48	8300		9200	10200	11100
60	7200		8000	8800	9600
72	6400		7100	7800	8500
84	5700		6400	7000	7700
96	5200		5800	6400	6900

***All Load Capacities are rated with the mast vertical.

17/25 Versa-Lift with 0 Counterweight Slabs

Slab Weight (lbs)

1500

Number of Slabs

0

Standard Wheel Base (in)

72

Lift Capacities w/Forks Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Fork Face (in)	24	13000	14300	15500	16800
	36	10500	11500	12500	13600
	48	8800	9600	10500	11400
	60	7500	8300	9000	9800
	72	6600	7300	7900	8600
	84	5900	6500	7100	7700

Lift Capacities w/Forks & Boom (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	12200	13600	14900	16200
	24	9700	10700	11800	12800
	36	7900	8800	9700	10600
	48	6700	7500	8200	9000
	60	5800	6500	7100	7800
	72	5100	5700	6300	6900
	84	4600	5100	5700	6200
	96	4200	4600	5100	5600

Lift Capacities w/Boom Only (lbs)					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	11400	12600	13700	14900
	24	9000	10000	10900	11800
	36	7400	8200	9000	9800
	48	6300	7000	7600	8300
	60	5400	6000	6600	7200
	72	4800	5300	5800	6400
	84	4300	4800	5200	5700
	96	3900	4300	4800	5200

***All Load Capacities are rated with the mast vertical.