

SD75B, SD115B

VOLVO SINGLE DRUM COMPACTORS 7-11.8 t / 15,430-26,000 lb 74-147 hp



A passion for performance.

At Volvo Construction Equipment, we're not just coming along for the ride. Developing products and services that raise productivity – we are confident we can lower costs and increase profits for customers around the globe. Part of the Volvo Group, we are passionate about innovative solutions to help you work smarter – not harder.

Helping you to do more

Doing more with less is a trademark of Volvo Construction Equipment. High productivity has long been married to low energy consumption, ease of use and durability. When it comes to lowering life-cycle costs, Volvo is in a class of its own.

Designed to fit your needs

There is a lot riding on creating solutions that are suited to the particular needs of different industry applications. Innovation often involves high technology – but it doesn't always have to. Some of our best ideas have been simple, based on a clear and deep understanding of our customers' working lives.





You learn a lot in 180 years

Over the years, Volvo has advanced solutions that have revolutionized the use of construction equipment. No other name speaks Safety louder than Volvo. Protecting operators, those around them and minimizing our environmental impact are traditional values that continue to shape our product design philosophy.

We're on your side

We back the Volvo brand with the best people. Volvo is truly a global enterprise, one that is on standby to support customers quickly and efficiently – wherever they are.

We have a passion for performance.

A strong, dedicated, capable dealer network.

Our dealers are strategically located throughout North America to provide the equipment you need and the parts and service support you demand for a productive and profitable operation.

The strength of our dealer network is enhanced with extensive individualized product support training at our best-in-class Customer Center in Shippensburg and through hands-on training. Using a great Product Demonstration Center featuring a dedicated area for most commons applications, visitors operate equipment from our entire product line under a variety of simulated working conditions. This facility is in year-round use by our dealers and customers.

Building the best starts right here.

The products designed and manufactured by Volvo Construction Equipment have their beginnings at the most advanced Research & Design centers in the industry. Volvo CE machines are designed in 11 R&D centers and produced in 15 manufacturing facilities across the world.

The major R&D center and manufacturing plant in the Americas is located in Shippensburg, Pennsylvania. This facility has been in operation for over 30 years and – with its recently added 200,000 sq. ft. expansion – now covers 570,000 sq. ft. on an 80 acre campus. Dedicated work teams and highly advanced technologies and techniques using the Volvo Production System ensure continuous quality improvements, labor savings and cost control to reach the high quality that our customers have come to expect from Volvo.

























Mack Trucks

Volvo Buses



Volvo Construction Equipment



Volvo Penta

Volvo Financial Services

Versatile performance.

The new Volvo SD75B and SD115B soil compactors are packed with advanced technology. The drum is configured with ease while the engine controls itself. The compactors adapt to your application and jobsite to provide maximum versatility and performance.

Frequency and amplitude choices

Easily adjust the vibration frequency from the operator console to compensate for changing soil types and conditions. Two frequency settings are standard and for even greater versatility, five frequency option is available. High and low amplitudes can also be selected.

Adaptive power

Adaptive power tailors machine performance by adjusting engine and hydraulic systems to individual job site requirements, providing the exact amount of power needed for increased efficiency. It's designed to run the machine at the optimal level needed for the job.





Application versatility

The machine can be set up in three different configurations and is available with smooth or padfoot drum. The compactor is quickly and easily converted from a smooth drum by clamping on a padfoot shell. The padfoot shell kit allows the machine to work in different applications and increases versatility.



Gradeability

The Volvo traction system provides excellent climbing and traction capabilities in difficult applications, such as steep inclines or slippery surfaces. The system prevents wheel or drum spin, improving gradeability, performance and productivity.





Power up, fuel down.

The perfectly optimized Volvo Tier 4 Final engine delivers high torque at low rpm for superior performance and low fuel consumption. The compactor's engine has been developed to offer greater fuel efficiency, increasing uptime and reducing costs.

Efficient cooling system

The hydraulically-driven fan with variable speed draws power only when needed. Lower fan speeds reduce noise, resulting in greater operator comfort and a lower total cost of ownership.



ECO mode is now standard and is always turned on by default. It adjusts the engine speed to match the operation mode and up to a 40% reduction in fuel consumption is achieved with ECO mode.

Passive regeneration

The new passive regeneration provides continuous and simplified operation. Volvo's passive regeneration cleans the filters automatically during normal operation without any input from the operator or effect on performance.





Eccentric design

The eccentric design delivers more efficiency while using less power. Matching the required performance to suit your application, the eccentric is designed for faster ramp up speeds at lower pressure for increased fuel efficiency.

Packed with intelligence.



Operator Environment

The ROPS/FOPS certified cab or open operator's area provides a safe and comfortable working environment with allaround visibility.



ECO mode

ECO mode is now standard and always on by default. It adjusts the engine speed to match the operation mode.

High quality components The compactor features the highest quality components, clever routing and clean design.

Heavy-duty

The heavy-duty drum, center joint and front frame components are designed and manufactured with durability in mind.

Frequency and amplitude choices

Easily adjust the vibration frequency from the operator console to compensate for changing soil types and conditions.

Drum performance

Volvo's advanced drum control system delivers multiple frequencies, dual amplitude, and optimized centrifugal force.



Control in comfort.

Step up to the Volvo designed cab and experience industry-leading low noise levels, ultimate comfort and a productive working environment. Safe, spacious and with improved all-around visibility, operators will work efficiently with less fatigue in a Volvo compactor.

Seat

The fully adjustable seat now rotates and slides to enhance front and rear visibility for increased safety and comfort.





HVAC system

The cab is equipped with industry-leading climate control to ensure a comfortable environment inside the cab, whether heating or air conditioning is required. High air intake and positive cabin pressure helps to reduce dust from entering the cab.

Operator display

The new high-tech color operator display presents operational information and key diagnostics, reducing the need for regular physical checks. Easy to see in direct sunlight, further functions include service interval information and machine operating conditions. The control keypad is conveniently located on the operator's side console and controls are grouped together for comfort and efficiency.



Impact meter

Integrated into the display, the impact meter ensures you travel at the right speed for target compaction. The impact meter measures impacts per meter for a uniformed smooth finish.





Robust and reliable.

Volvo Construction Equipment produces the most robust and durable compactors on the market. The SD75B and SD115B machines provide easy service access for increased uptime and quick maintenance.

Service Access

The cab tilt is standard, providing access to all hydraulic components. For class-leading access, the electric engine hood lifts up giving extensive ground level access to the engine compartment. Maintenance and inspections can be conducted more efficiently with minimal downtime – increasing overall productivity and reliability.

Maintenance and inspections can be conducted more efficiently with minimal downtime – increasing overall productivity and reliability.

CareTrack

CareTrack is the state-of-the-art telematics system designed for Volvo Construction Equipment. Stay informed, receive reports, alarms and information such as fuel status, machine location and hours so you can plan your service more efficiently. Stay ahead of unscheduled downtime and check that your machine is being operated efficiently.





Sealed electronics

All components and electronics have been moved into the cab and mounted on the rear wall, protecting them from the elements. Fuses are accessible behind the fuse panel for improved accessibility.

Heavy-duty


The heavy-duty drum, centre joint and front frame components are designed and manufactured with durability in mind. The thick steel drum shell is engineered for longevity and performance. Frames are robotically welded and built from high quality steel with precise and consistent welds guaranteeing a strong structure.


Specifications.

Model Drum type			SD75B				SD115B				
			Smooth Padfoot			Smooth Padfoot					
Machine Weights (inc. RO	PS & in	side sc	raper)								
Operating Weight (CECE)	kg	lb	7 000	15,400	7 251	15,952	11 643	25,615	11 800	25,960	
Static Weight @ Drum	kg	lb	3 600	7,920	3 863	8,499	6 243	13,735	6 400	14,080	
Static Weight @ Tires	kg	lb	3 400	7,480	3 388	7,454	5 400	11,880	5 400	11,880	
Shipping Weight	kg	lb	6 889	15,156	7 140	15,708	11 513	25,329	11 670	25,674	
Drum			-	,				•			
Width	mm	in	1 676	66	1 676	66	2 134	84	2 134	84	
Diameter	mm	in	1 219	48	1 219	48	1 500	59	1 295	51	
Shell Thickness	mm	in	22	1	22	1	25	1	25	1	
Diameter Over Pad Feet	mm	in	-	-	1 369	54	-	-	1 550	61	
Pad Feet	nun	nber of	-			-	-	112			
Pad Height	mm	in	-	-	75	3	-	-	127	5	
Pad Tip Area	cm ²	in ²	-	-	125	19	-	-	135.3	21	
Vibration											
Frequency	Hz	vpm	30.8/33.8	1,850/2,025	30.8/33.8	1,850/2,025	30.8/33.8	1,850/2,025	30.8/33.8	1,850/2,025	
Optional 5 Frequency (High Amp)	Hz	vpm	23.3-30.8	1,398-1,850	23.3-30.8			1,398-1,850			
Centrifugal Force High Amp	kN	lb	132	29,700	105	23,625	258	58,050	258	58,050	
Low Amp	kN	lb	96	21,600	96	21,600	208	46,800	208	46,800	
Nominal Amplitude High Amp	mm	in	1.94	0.08	1.49	0.06	1.92	0.08	1.68	0.07	
Low Amp	mm	in	1.16	0.05	0.89	0.04	1.29	0.05	1.13	0.04	
Propulsion											
Туре						Hydro	static				
Tire			14.9-24 R3 6PR TT 14.9-24 R1 6PR TL			23.1-26 R3 8PR TT 23.1-26 R1 8PR TL					
Drum Drive			LSHT Motor			Planetary Gear Box					
Travel Speed					1410101			- Tarrotary	Godi Box		
High	km/h	mph	12.3	7.6	13	8.1	10	6.2	10	6.2	
Low	km/h	mph	6.5	4.0	7.5	4.7	4.5	2.8	4.3	2.7	
Engine	KIIIZII	Прп	0.0	7.0	7.0		7.0	2.0	7.0	2.1	
Make / Model				Volvo D33	R Tier 1 F			Volvo D4	Tier / F		
Engine Type			Volvo D3.8 Tier 4 F			Volvo D4 Tier 4 F Turbocharged 4 cylinder					
Rated Power @ 2,200 rpm	kW	hp	Turbocharged 4 cylinder 55.4 74			110 147					
Electrical System	KVV	ПР		J.4	ı	4		10	1.	+1	
Voltage (Negative ground)		Volt		11	0			0	1		
		Ah	12				24 120				
Alternator			100 1 x 1 125				2 x 1 125				
Batteries		CCA		1 X I	125			2 X I	125		
Brakes						I b alaa	.1.11.				
Service			Hydrostatic Spring-applied, hydraulically released on drum & axle								
Parking / Secondary				5	pring-applie	u, nyaraulicali	y released o	on arum & axl	e		
Miscellaneous		0			20				25		
Articulation Angle		0		+/- 38 +/- 12				+/- 35 +/- 12			
Oscillation Angle						10					
Fuel Capacity		gal		15		80		30		34	
Hydraulic Oil Capacity		gal		80		6		'5 		20	
Gradeability (theoretical)		%	6	35	6	60	6	35	6	60	

Equipment.

DIMENSIONS											
Model		SD	75B		SD115B						
	Smoot	h drum	Padfoo	ot drum	Smoot	h drum	Padfoot drum				
	mm	in	mm	in	mm	in	mm	in			
Α	1 830	72	1 830	72	2 286	90	2 286	90			
В	1 676	66	1 676	66	2 134	84	2 134	84			
С	2 183	86	2 252	88.7	2 269	89.3	2 288	90.1			
D	383	15.1	452	17.8	483	19	498	19.6			
Е	2 677	105.4	2 677	105.4	3 095	121.9	3 095	121.9			
F	5 044	198.6	5 044	198.6	6 091	239.8	6 091	239.8			
G	2 924	115.1	2 993	117.8	3 000	118.1	3 020	118.9			
Н	609	23.9	681	26.8	755	29.7	774	30.5			

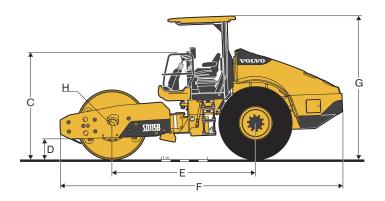



SELECTION OF VOLVO OPTIONAL EQUIPMENT

Tyres





Padfoot drum



Blade



Work lights




Compaction Meter



Traction system



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

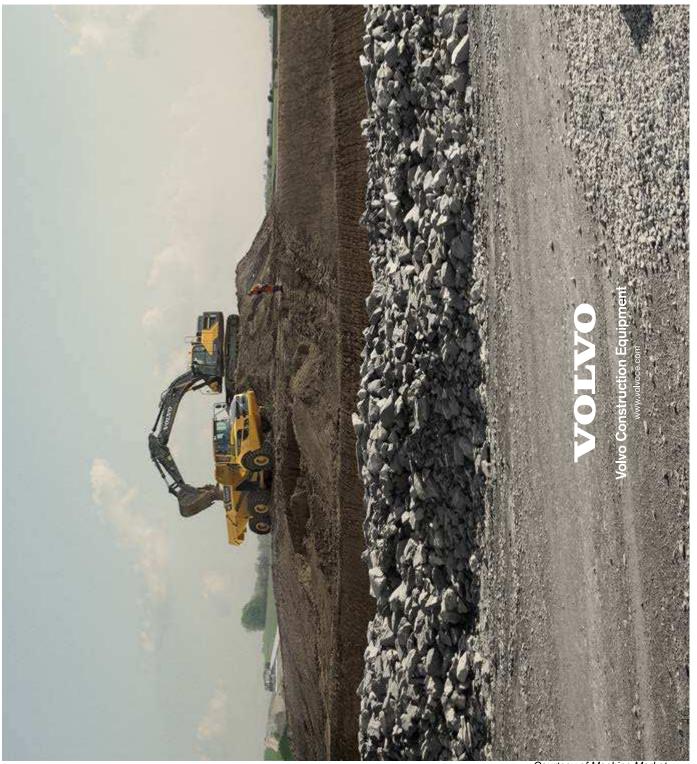

Courtesy of Machine.Market