


Area Plus™ Outrigger Pads

Model Specifications

PATENT PENDING



630-725-9373 | info@raptortechinc.com
5411 Walnut Avenue, Downers Grove, IL 60515

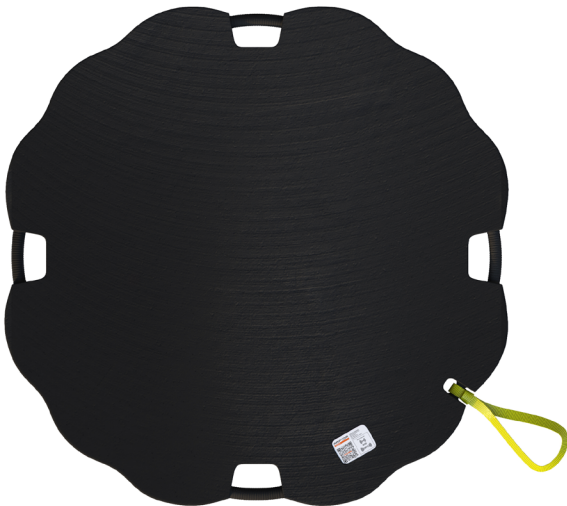

Key Features

- 100% full product transparency
- Embedded RFID and NFC technology
- Engineering data and material certifications
- All pad data accessible via smartphone
- Automatically update and track inventory
- Reduces employee NIOSH lifting index
- Removeable lifting lanyard with capacity rating
- Better roll control & increased surface area
- Reduces risk of heavy, runaway pads
- Non-breakable ergonomic through hole handles

Model Number Guide: Shape = Round (R) | Dimensions = Diameter or W x L in inches | Thickness = 2 or 3 inches | Material = UHMW

Model	Dimension (inch)	Approx. Area (sq. ft.)	Weight (lbs.)	Crush Rating (psi)	Working Load Limit (lbs.)
AP-R30-2-UHMW	30 x 2	5.0	49.8	500	100,000
AP-R36-2-UHMW	36 x 2	7.1	71.2	500	100,000
AP-R42-2-UHMW	42 x 2	9.7	96.5	500	115,000
AP-R48-2-UHMW	48 x 2	12.6	125.5	500	130,000
AP-R54-2-UHMW	54 x 2	16.0	159.1	500	145,000
AP-R60-2-UHMW	60 x 2	19.8	196.7	500	160,000
AP-R36-3-UHMW	36 x 3	7.1	106.5	600	130,000
AP-R42-3-UHMW	42 x 3	9.7	144.3	600	150,000
AP-R48-3-UHMW	48 x 3	12.6	187.8	600	170,000
AP-R54-3-UHMW	54 x 3	16.0	238.3	600	190,000
AP-R60-3-UHMW	60 x 3	19.8	294.6	600	210,000