

PC210LC

NET HORSEPOWER

118 kW @ 2000rpm

OPERATING WEIGHT

22203–23603 kg

BUCKET CAPACITY

0.50–1.20 m³



PHOTOS MAY INCLUDE OPTIONAL EQUIPMENT

PC210LC

WALK-AROUND

PC210LC-G-10



Photos may include optional equipment

Courtesy of Machine.Market

PC210LC-10

Tier 4 Interim Engine

NET HORSEPOWER
158 HP @ 2000rpm
118 kW @ 2000rpm

OPERATING WEIGHT
48,950–52,036 lb
22203–23603 kg

BUCKET CAPACITY
0.66–1.57 yd³
0.50–1.20 m³



FAST CYCLE TIMES & LOW FUEL CONSUMPTION

Komatsu's Closed Center Load Sensing (CLSS) hydraulic system provides quick response and smooth operation to maximize productivity.

New engine and hydraulic pump control technology improves operational efficiency and lowers fuel consumption.

A powerful Komatsu SAA6D107E-2 engine provides a net output of 118 kW **158 HP**. This engine is EPA Tier 4 Interim and EU stage 3B emissions certified.

Komatsu Variable Geometry Turbocharger (KVGT) uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

Komatsu Diesel Particulate Filter (KDPF) captures 90% of particulate matter and provides automatic regeneration that does not interfere with daily operation.

Large displacement high efficiency pumps provide higher flow output and efficient operation.

Enhanced working modes are designed to match engine speed, pump delivery, and system pressure to the application.

Increased drawbar pull provides improved steering and maneuverability.

Large LCD color monitor panel:

- 7" high resolution screen
- Provides "Eco-Guidance" for fuel efficient operation
- Enhanced attachment control

Rearview monitoring system (standard)

Equipment Management Monitoring System (EMMS)

continuously monitors machine operation and vital systems to identify machine issues and assist with troubleshooting.

Enhanced working environment

- High back, heated, and air suspension operator seat
- Integrated ROPS cab design (ISO 12117-2)
- Cab meets ISO Level 1 Operator Protective Guard (OPG) top guard (ISO 10262)

Komatsu designed and manufactured components



Guardrails (standard) located on the machine upper structure provide a convenient work area in front of the engine.


Swing out cooler design provides easy access to service and clean the cooler assembly.

Battery disconnect switch allows a technician to disconnect the power supply before servicing the machine.

Standard 10,406 lb (4720 kg) counterweight provides the same lifting performance as the PC200LC-8 (optional **7,937 lb** 3600 kg counterweight is available).


KOMTRAX®

Komtrax equipped machines can send location, SMR and operation maps to a secure website utilizing wireless technology. Machines also relay error codes, cautions, maintenance items, fuel levels, and much more.

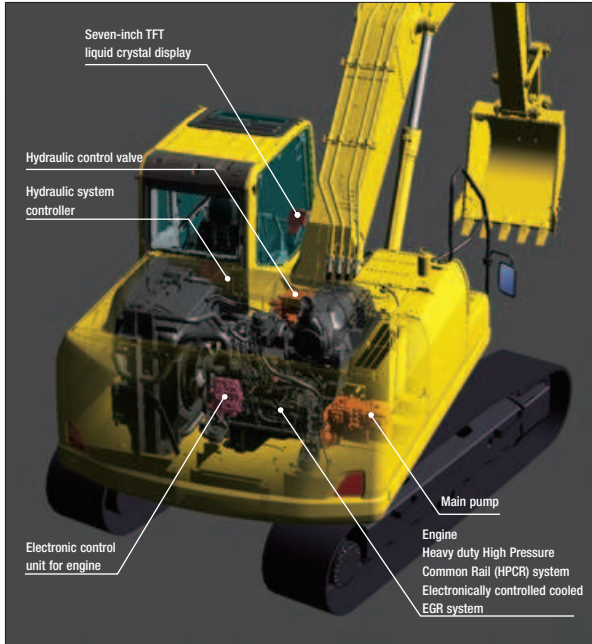

Advanced Electronic Control System

The engine control system has been upgraded to effectively manage the air flow rate, EGR gas flow rate, fuel injection parameters, and aftertreatment functions. The new control system also provides enhanced diagnostic capabilities.

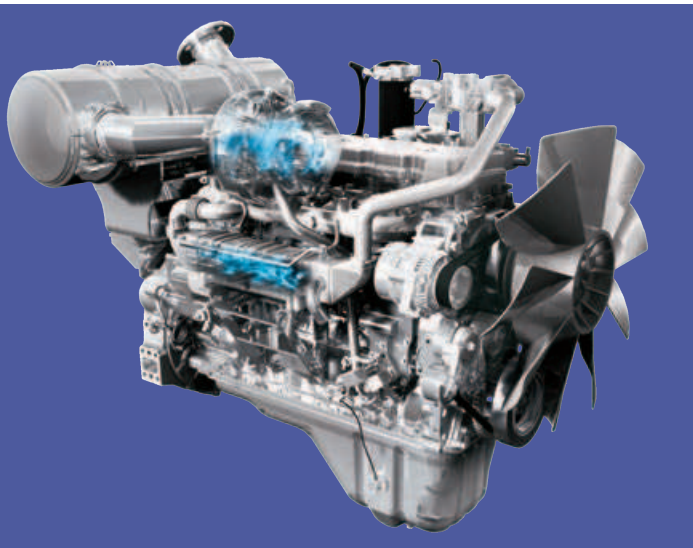

Environment-Friendly Engine


The Komatsu SAA6D107E-2 engine is EPA Tier 4 Interim and EU Stage 3B emissions certified and provides exceptional performance while reducing fuel consumption. Based on Komatsu proprietary technologies developed over many years, this new diesel engine reduces exhaust gas particulate matter (PM) by more than 90% and nitrogen oxides (NOx) by more than 45% when compared to Tier 3 levels.

Through the in-house development and production of engines, electronics, and hydraulic components, Komatsu has achieved great advancements in technology, providing high levels of performance and efficiency in virtually all applications.

Komatsu Diesel Particulate Filter (KDPF)

Komatsu has developed a high efficiency diesel particulate filter that captures more than 90% of particulate matter. Both passive and active regeneration are automatically initiated by the engine controller depending on the soot level of the KDPF. A special oxidation catalyst with a fuel injection system is used to oxidize and remove particulate matter while the machine is running so the regeneration process will not interfere with daily operation.

The operator can also initiate regeneration manually or disable regeneration depending on the work environment.

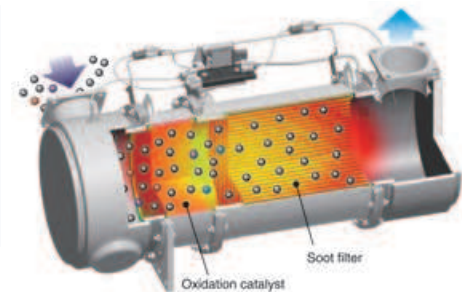


Closed Crankcase Ventilation (CCV)

Crankcase emissions (blow-by gas) are passed through a CCV filter. The CCV filter traps oil mist which is returned back to the crankcase while the gas, which is almost oil mist free, is fed back to the air intake.




Komatsu Variable Geometry Turbocharger (KVG T)

Using Komatsu proprietary technology, a newly designed variable geometry turbocharger with a hydraulic actuator is used to manage and deliver optimum air flow to the combustion chamber under all speed and load conditions. The robust hydraulic actuator provides power and precision, resulting in cleaner exhaust gas and improved fuel economy while maintaining performance.

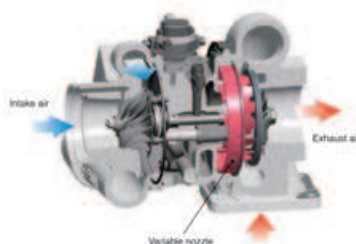

Redesigned Combustion Chamber

The combustion chamber located at the top of the engine piston has a new shape designed to improve combustion and further reduce NOx, PM, fuel consumption, and noise levels.

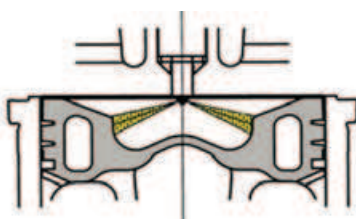


Low Operational Noise

The PC210LC-10 provides low noise operation using a low noise engine and methods that reduce noise at the source such as sound absorbing materials.


Cooled Exhaust Gas Recirculation (EGR)

Cooled EGR, a technology that has been well proven in Komatsu Tier 3 engines, reduces NOx emissions to meet Tier 4 levels. The hydraulically actuated EGR system has increased capacity and uses larger and more robust components to ensure reliability for demanding work conditions.



Heavy Duty High Pressure Common Rail (HPCR) Fuel Injection System

The heavy duty HPCR system is electronically controlled to deliver a precise quantity of pressurized fuel into the combustion chamber using multiple injection events to achieve complete fuel burn and reduce exhaust gas emissions. Fuel injector reliability has been improved by using ultra-hard wear resistant materials.



Large Digging Force

The PC210LC-10 is equipped with the Power Max system. This function temporarily increases digging force for 8.5 seconds of operation.

Maximum arm crowd force (ISO):

101 kN (10.3 t) ➔ **108 kN (11.0 t)** **7 % UP**
(with Power Max.)

Maximum bucket digging force (ISO):

138 kN (14.1 t) ➔ **149 kN (15.2 t)** **8 % UP**
(with Power Max.)

* Measured with Power Max function, 3045 mm arm and ISO rating



Efficient Hydraulic System

The PC210LC-10 uses a Closed Center Load Sensing (CLSS) hydraulic system that improves fuel efficiency and provides quick response to the operator's demands.

The PC210LC-10 also introduces new technology to enhance the engine and hydraulic pump control. This total control system matches the engine and hydraulics at the most efficient point under any load condition. There have also been improvements in the main valve and hydraulic circuit to reduce hydraulic loss, resulting in higher efficiency and lower fuel consumption.

Reduced Up To 10% Fuel consumption

vs PC200LC-8
Based on typical work pattern collected via KOMTRAX

Large Displacement High Efficiency Pump

Pump displacement has been increased, providing increased flow output as well as operation at the most efficient engine speed.



Idling Caution


To reduce unnecessary fuel consumption, an idling caution is displayed on the monitor if the engine idles for 5 minutes or more.



Working Mode Selection

The PC210LC-10 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). Each mode is designed to match engine speed, pump flow, and system pressure to the application. The PC210LC-10 features a new mode (ATT/E) which allows operators to run attachments while in Economy mode.

Working Mode	Application	Advantage
P	Power mode	<ul style="list-style-type: none"> •Maximum production/power •Fast cycle times
E	Economy mode	<ul style="list-style-type: none"> •Good cycle times •Better fuel economy
L	Lifting mode	<ul style="list-style-type: none"> •Increases hydraulic pressure
B	Breaker mode	<ul style="list-style-type: none"> •Optimum engine rpm, hydraulic flow
ATT/P	Attachment Power mode	<ul style="list-style-type: none"> •Optimum engine rpm, hydraulic flow, 2-way •Power mode
ATT/E	Attachment Economy mode	<ul style="list-style-type: none"> •Optimum engine rpm, hydraulic flow, 2-way •Economy mode

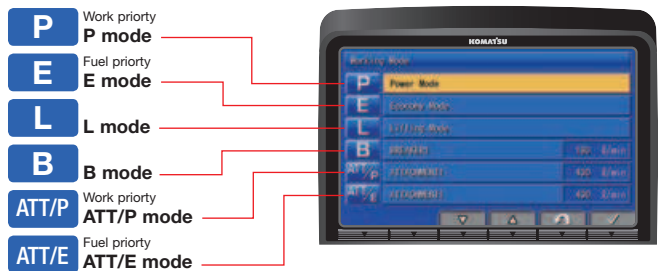


Lifting Mode

When the Lifting mode is selected, the lift capacity is increased 7% by raising the hydraulic pressure.

Eco-Gauge Assists with Energy Saving Operations

The Eco-gauge and new fuel consumption gauge are viewed on the right side of the color monitor and assist the operator in maintaining low fuel consumption and environment friendly operation.

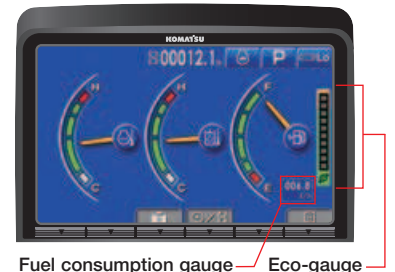

RELIABILITY FEATURES

High Rigidity Work Equipment

Booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross-sectional areas and large one piece castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress.



Komatsu Designed Components

All of the major machine components such as the engine, hydraulic pumps, hydraulic motors, and control valves are exclusively designed and manufactured by Komatsu.

High Efficiency Fuel Filter

A new high efficiency dual element fuel filter improves fuel system reliability.



Equipped with a Fuel Pre-filter (With Water Separator)

A fuel pre-filter removes water and contaminants in the fuel to increase reliability. For convenience, the fuel pre-filter has a built in priming pump.



O-Ring Face Seals

Flat face-to-face O-ring seals are used to securely seal hydraulic hose connections.




Durable Frame Structure

The revolving frame, center frame, and undercarriage are designed using the most advanced three dimensional CAD and FEM analysis technology.


DT-type Connectors

Sealed DT-type connectors provide high reliability, water resistance, and dust resistance.

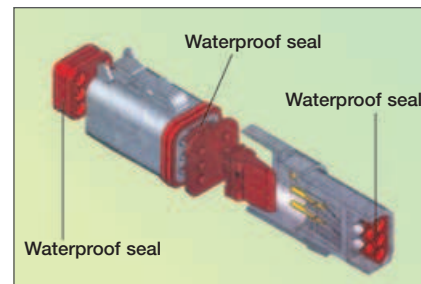


Grease Sealed Track

The PC210LC-10 uses grease sealed tracks for extended undercarriage life.

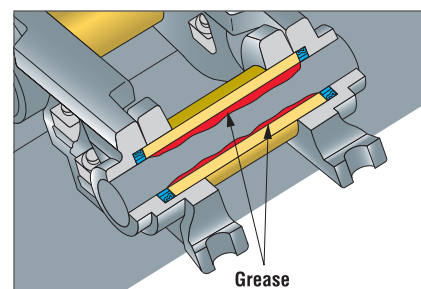


Metal Guard Rings

The PC210LC-10 uses metal guard rings to protect all of the hydraulic cylinders and improve long term reliability.

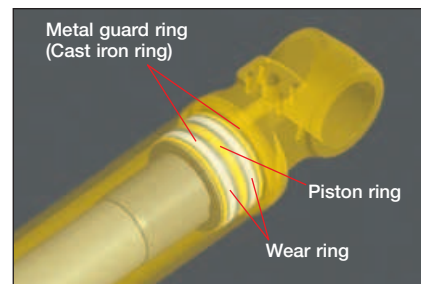

Durable Arm Tip Bushing

The end face of the arm tip bushing provides high resistance to seizure and wear.

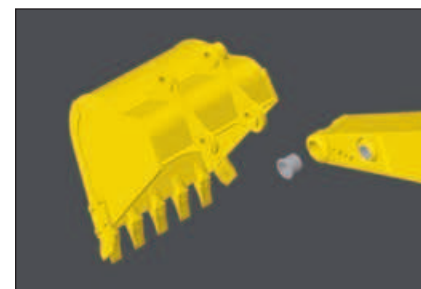

Highly Reliable Electronic Devices

Exclusively designed electronic devices have passed severe testing.

- Controllers
- Sensors
- Connectors
- Heat Resistant Wiring



Newly Designed Wide Spacious Cab

The newly designed wide spacious cab features a high back, fully adjustable seat with a reclining backrest. The console and seat have an integrated design so that they move together and provide additional comfort for the operator.

The new higher capacity operator seat has been enhanced to provide more comfort.

- Heated
- Air Suspension
- Integrated Seat
- Console Mounted Arm Rests




Low Cab Noise

The new cab design is highly rigid and has excellent sound absorption ability. By improving noise source reduction and by using a low noise engine, hydraulic equipment, and air conditioner, this machine is able to generate low noise levels similar to that of a modern automobile.

Automatic Air Conditioner

The automatic air conditioner allows the operator to easily and precisely set the cab atmosphere using the large LCD color monitor panel. The bi-level control function improves air flow and keeps the inside of the cab comfortable throughout the year.

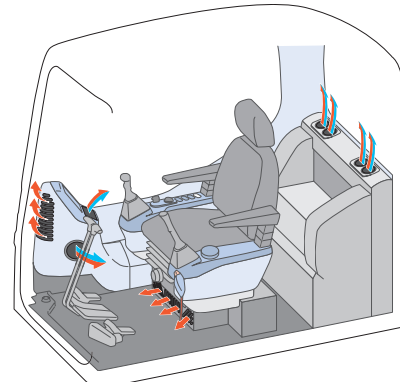


Pressurized Cab

The air conditioner, air filter, and a higher internal cab air pressure minimize the amount of external dust that enters the cab.

Low Vibration with Viscous Cab Mounts

The PC210LC-10 uses viscous mounts for the cab that incorporate a longer stroke and the addition of a spring. The cab damper mounting combined with a high rigidity deck reduces vibration at the operator's seat.

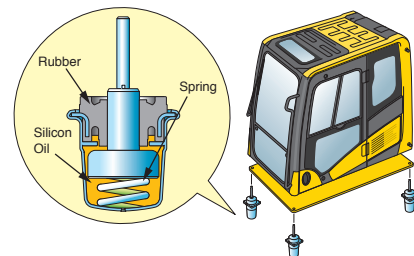

Auxiliary Input (MP3 Jack)

By connecting an auxiliary device such as an MP3 player to the auxiliary input, the operator can hear the sound through the speakers installed in the cab.





Large High Resolution LCD Monitor Panel

A new large, user-friendly, high resolution LCD color monitor enables accurate and smooth work. Screen visibility and resolution are further improved compared to the previous LCD monitor panel. The switches and function keys are easy to operate and provide simple navigation through the monitor screens.

Data is displayed in 25 languages to support operators around the world.

Indicators

- | | |
|----------------------------------|-----------------------------------|
| 1 Auto-decelerator | 5 Hydraulic oil temperature gauge |
| 2 Working mode | 6 Fuel gauge |
| 3 Travel speed | 7 Eco-gauge |
| 4 Engine water temperature gauge | 8 Fuel consumption gauge |
| | 9 Function switches menu |

Basic operation switches

- | | |
|-------------------------|---------------------|
| 1 Auto-decelerator | 4 Buzzer cancel |
| 2 Working mode selector | 5 Wiper |
| 3 Traveling selector | 6 Windshield washer |

Basic operation switches

Function switches


Air conditioner operation switches

Operational "ECO" Guidance


The monitor panel provides operational advice to the operator to help improve machine efficiency and lower fuel consumption. The operator can access the ECO guidance menu to check the Operation Records, Eco Guidance Records, and Average Fuel Consumption Logs.




ECO Guidance




ECO Guidance menu



ECO Guidance Records



Operation Records




Average Fuel Consumption Logs

Improved Attachment Control

The PC210LC-10 is capable of storing up to ten different attachments in the new monitor panel. The name of each attachment can be changed for better tool management. Hydraulic flow rates can be easily adjusted for one-way and two-way flow attachments.




Attachment Setting Screen



Attachment Flow Screen

Easy Access Coolers

The radiator and oil cooler are side-by-side modules which simplifies cleaning, removing, and installing. The swing out cooler design provides easier access to the cooling cores.



KDPF Regeneration Notification

The LCD color monitor panel provides the operator with the status of the KDPF regeneration, without interfering with daily operation.

When the machine initiates active regeneration an icon will appear to notify the operator.



Battery Disconnect Switch


A standard battery disconnect switch allows a technician to disconnect the power supply and lock out before servicing the machine.



Manual Stationary Regeneration

Under most conditions, active regeneration will occur automatically with no effect on machine operation. In case the operator needs to disable active regeneration or initiate a manual stationary regeneration, this can be easily accomplished through the monitor panel.

A soot level indicator is displayed to show how much soot is trapped in the KDPF.

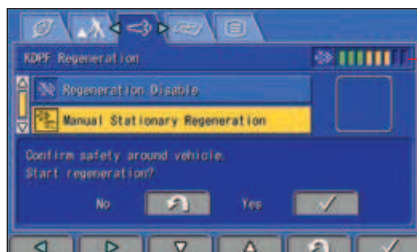

Soot level indicator

Long Life Oils, Filters

High performance filters are used in the hydraulic circuit and engine. By increasing the oil and filter replacement intervals, maintenance costs can be significantly reduced.



Hydraulic oil filter (Eco-white element)

Engine oil & Engine oil filter	every 500 hours
Hydraulic oil	every 5000 hours
Hydraulic oil filter	every 1000 hours

Extended Work Equipment Greasing Intervals

Special hard material is used for the work equipment bushings to lengthen the greasing intervals. All work equipment bushing lubrication intervals, except the arm tip and bucket linkage, are 500 hours, reducing maintenance costs.



Photos may include optional equipment

Equipped with Eco-drain Valve

Minimizes ground contamination due to oil leakage when replacing the engine oil.



Equipment Management Monitoring System (EMMS)

The PC210LC-10 features an advanced diagnostic system that continuously monitors the machine's vital systems. EMMS tracks maintenance items, provides advanced troubleshooting tools, reduces diagnostic times, and displays error codes.

Through continuous monitoring, the EMMS helps identify issues before they become worse and allows the operator to concentrate on the work at hand.

Abnormalities Display with Code

When an abnormality occurs an error code is displayed on the monitor. When an important code is displayed, a caution lamp blinks and warning buzzer sounds to alert the operator to take action.



The monitor also stores a record of abnormalities for more effective troubleshooting.


Advanced Monitoring System

The monitor provides advanced monitoring diagnostics to assist with troubleshooting and reduce costly downtime.




Maintenance Tracking

When the machine approaches or exceeds the oil and filter replacement interval, the monitor panel will display lights to inform the operator.

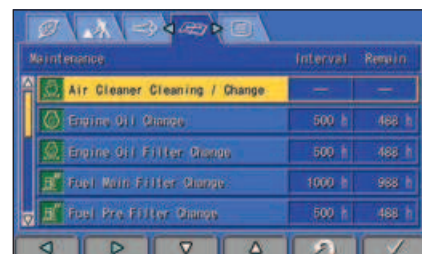

ROPS Cab Design

The PC210LC-10 is equipped with an integrated ROPS cab as standard equipment. The cab also meets OPG Top Guard Level 1 requirements.

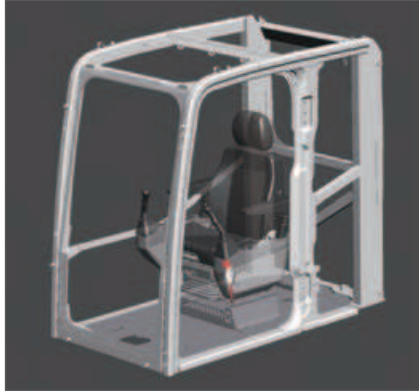

Guardrails

Guardrails have been added on the upper structure of the machine. This provides additional convenience during engine service.



Thermal and Fan Guards

Thermal and fan guards are placed around high temperature parts of the engine and fan drive.



Rear-view Monitoring System (standard)

On the large LCD color monitor the operator can view the image from one camera that will display areas directly behind the machine. An optional 2-camera system is available.



Rear view image on monitor

Seat Belt Caution Indicator

A warning indicator on the monitor appears when the seat belt is not engaged.



Lock Lever

When the lock lever is placed in the lock position, all hydraulic controls (travel, swing, boom, arm, and bucket) are inoperable.



Secondary Engine Shutdown Switch

A new secondary switch has been added to shutdown the engine.



Slip Resistant Plates

Durable slip resistant plates maintain excellent foot traction



KOMTRAX EQUIPMENT WORKING ENVIRONMENT MONITORING



KOMTRAX is Komatsu's remote equipment monitoring and management system. KOMTRAX gathers critical machine and operation information and provides it in a user-friendly format so that you can make well-informed decisions. KOMTRAX gives you more control of your equipment and better control of your business!

KOMTRAX comes standard on all new Komatsu machines with complimentary manufacturer communications services throughout the entire ownership period. It is a powerful tool and makes Komatsu machines an even better purchase!

Fleet Optimization

KOMTRAX tells you how your machines and operators are performing. KOMTRAX provides:

- Fuel consumption data and trends, by unit or fleet
- Machine fuel level
- Machine utilization
- Actual working hours/Machine idle hours
- Attachment usage hours
- Machine travel hours
- Machine load analysis
- Operating mode ratios

Location and Asset Management

KOMTRAX tells you where your machines are and can help prevent unauthorized use. KOMTRAX provides:

- GPS location/Operation maps
- Out-of-area and movement alert with location and time
- Engine, nighttime, and calendar lock

Maintenance Management

KOMTRAX monitors the health of your machines and provides critical information so that you, and your distributor, can take proactive maintenance measures and reduce downtime. KOMTRAX provides:

- Service Meter Reading (SMR)
- Cautions/Abnormality codes
- Maintenance replacement notifications

Easy and Flexible Access to Information

With KOMTRAX, information about your machines is available through a convenient, internet-based portal. KOMTRAX provides:

- A user-friendly KOMTRAX website that provides customized access to your machine information
- E-mail and text alerts
- Web dial-up service
- Monthly fleet summary reports

For more information, including terms and conditions of the manufacturer complimentary KOMTRAX communication service, ask your distributor, pick up a KOMTRAX brochure, or go to www.komatsuamerica.com/komtrax.

KOMTRAX®

For construction and compact equipment.

KOMTRAX Plus®

For production and mining class machines.

KOMATSU PARTS & SERVICE SUPPORT



Komatsu is an industry leader in building reliable and technologically advanced machines. It is only fitting that we would provide superior Product Support. Komatsu and its distributors are focused on providing their customers unparalleled Product Support throughout the entire lifecycle of the machine. It's called Komatsu CARE.

Komatsu CARE – Complimentary Scheduled Maintenance

Komatsu remains focused on lowering the customer's ownership costs by engineering machines with increased fuel efficiency and productivity. In addition, one Komatsu CARE program aimed at further reducing your owning and operating costs is Complimentary Scheduled Maintenance. Komatsu machine owners can now rely on their Komatsu Distributor to perform the preventative maintenance on their Komatsu Tier 4 machines.

- Complimentary scheduled maintenance for the earlier of 3 years or 2,000 hours is standard on all Komatsu Tier 4 construction machines and is available at all distributors in the U.S. and Canada.
- Service is performed by factory certified technicians using only Komatsu Genuine parts and fluids
- Significantly lowers your cost of ownership while maintaining high equipment uptime and reliability
- Increases resale value and provides detailed maintenance records


Komatsu CARE – Extended Coverage

Komatsu equipment is built to withstand harsh operating environments, but our Extended Coverage can provide further peace of mind by protecting customers from unplanned expenses and impacts in cash flow. Purchasing Komatsu CARE's Extended Coverage locks-in the cost of covered parts and labor for the extended warranty period and helps to turn these variable expenses into a fixed cost.

- No Stop Loss or Loss Limits imposed, regardless of the coverage type or repair expense
- Any combination of months and hours out to five years and 10,000 engine hours – KOWA kits included
- Coverage premium can be rolled into the machine financing at time of sale or purchased any time before the expiration of the machine's standard warranty
- Coverage is fully transferable and honored by all Komatsu distributors throughout the U.S. and Canada

Komatsu CARE – Total CARE

Total CARE combines the benefits of the Komatsu CARE Scheduled Maintenance and Extended Coverage programs on your Tier 4 machine. This ensures the use of Komatsu genuine parts and fluids during regular maintenance intervals as well as highly skilled and efficient technicians to perform any other warranty repair work that might be necessary to keep your Komatsu equipment running like new.

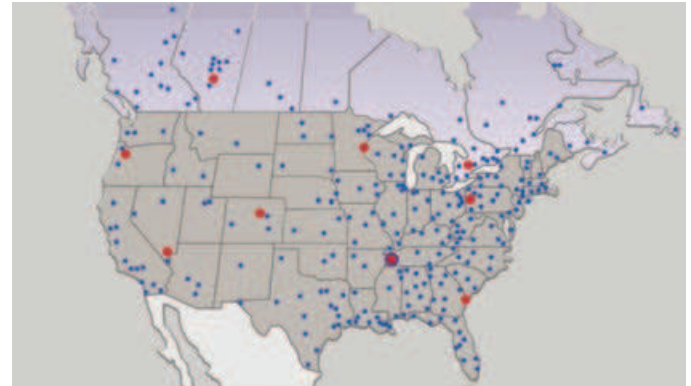

Komatsu Parts Support

Because downtime can be costly, Komatsu maintains a strategic distribution network throughout the U.S. and Canada, to ensure superior parts availability and to keep your Komatsu machine up and running.

- Komatsu America has nine Parts Distribution Centers strategically located throughout the U.S. and Canada
- Komatsu America's Parts distribution network is accessible 24/7/365 to fulfill your parts needs
- Komatsu has a distributor network of over 325 locations across the U.S. and Canada
- Online parts ordering available through Komatsu eParts, 24/7/365. (See distributor for details)
- Komatsu offers a full line of factory Remanufactured products with same-as-new warranties at a significant cost reduction:
 1. Complete Engine Assemblies
 2. Transmissions
 3. Torque Converters
 4. Hydraulic components
 5. Starters, Alternators, turbochargers and circuit boards

Komatsu Oil and Wear Analysis (KOWA)

The KOWA program uses independent laboratories across the United States to determine how your machine is performing based on a small sample of oil or other fluid. Just like a doctor will take a blood test to check on your personal health, KOWA allows you to check how your equipment is performing. Used with PM Clinic and PM Tune Up, KOWA is one of your best tools for proactively maintaining your Komatsu equipment and maximizing its availability and performance.

KOWA detects fuel dilution and coolant leaks, identifies contaminants, and measures wear-metals. Your distributor will help you interpret this information so you can identify potential problems and head them off before they lead to major repairs.

For more information of all of the manufacturer sponsored programs mentioned in this brochure, including terms and conditions of the individual programs, please speak with your distributor or go to www.komatsuamerica.com

SPECIFICATIONS



ENGINE

Model..... Komatsu SAA6D107E-2*
 Type.....Water-cooled, 4-cycle, direct injection
 Aspiration..... Turbocharged, aftercooled, cooled EGR
 Number of cylinders..... 6
 Bore.....107 mm **4.21"**
 Stroke.....124 mm **4.88"**
 Piston displacement.....6.69 ltr **408 in³**
 Horsepower:
 SAE J1995.....Gross 123 kW **165 HP**
 ISO 9249 / SAE J1349.....Net 118 kW **158 HP**
 Rated rpm..... 2000
 Fan drive method for radiator cooling..... Mechanical
 Governor..... All-speed control, electronic
 *EPA Tier 4 Interim and EU stage 3B emissions certified



HYDRAULICS

Type.....HydrauMind (Hydraulic Mechanical Intelligence New Design) system, closed-center system with load sensing valves and pressure compensated valves
 Number of selectable working modes..... 6
 Main pump:
 Type.....Variable displacement piston type
 Pumps for.....Boom, arm, bucket, swing, and travel circuits
 Maximum flow..... 475 ltr/min **125.5 gal/min**
 Supply for control circuit..... Self-reducing valve
 Hydraulic motors:
 Travel.....2 x axial piston motors with parking brake
 Swing.....1 x axial piston motor with swing holding brake
 Relief valve setting:
 Implement circuits..... 37.3 MPa 380 kg/cm² **5,400 psi**
 Travel circuit..... 37.3 MPa 380 kg/cm² **5,400 psi**
 Swing circuit..... 28.9 MPa 295 kg/cm² **4,190 psi**
 Pilot circuit..... 3.2 MPa 33 kg/cm² **470 psi**

Hydraulic cylinders:

(Number of cylinders – bore x stroke x rod diameter)

Boom .. 2–130 mm x 1334 mm x 90 mm **5.1" x 52.5" x 3.5"**
 Arm1–135 mm x 1490 mm x 95 mm **5.3" x 58.7" x 3.7"**
 Bucket.. 1–115 mm x 1120 mm x 80 mm **4.5" x 44.1" x 3.2"**



DRIVES AND BRAKES

Steering control..... Two levers with pedals
 Drive method..... Hydrostatic
 Maximum drawbar pull.....202 kN 20570 kg **45,349 lb**
 Gradeability.....70%, 35°
 Maximum travel speed: High..... 5.5 km/h **3.4 mph**
 (Auto-Shift) Mid..... 4.1 km/h **2.5 mph**
 (Auto-Shift) Low..... 3.0 km/h **1.9 mph**
 Service brake..... Hydraulic lock
 Parking brake..... Mechanical disc brake



SWING SYSTEM

Drive method..... Hydrostatic
 Swing reduction..... Planetary gear
 Swing circle lubrication..... Grease-bathed
 Service brake..... Hydraulic lock
 Holding brake/Swing lock..... Mechanical disc brake
 Swing speed..... 12.4 rpm
 Swing torque..... 6900 kg•m **49,907 ft lbs**



UNDERCARRIAGE

Center frame..... X-frame
 Track frame..... Box-section
 Seal of track..... Sealed track
 Track adjuster..... Hydraulic
 Number of shoes (each side)..... 49
 Number of carrier rollers (each side)..... 2
 Number of track rollers (each side)..... 9



COOLANT & LUBRICANT CAPACITY (REFILLING)

Fuel tank..... 400 ltr **105.7 U.S. gal**
 Coolant..... 30.7 ltr **8.1 U.S. gal**
 Engine..... 23.1 ltr **6.1 U.S. gal**
 Final drive, each side..... 5.0 ltr **1.3 U.S. gal**
 Swing drive..... 6.5 ltr **1.7 U.S. gal**
 Hydraulic tank..... 132 ltr **34.9 U.S. gal**
 Hydraulic system..... 234 ltr **61.8 U.S. gal**



OPERATING WEIGHT (APPROXIMATE)

Operating weight includes 5700 mm **18'8"** one-piece boom, 2925 mm **9'7"** arm, SAE heaped 1.02 m³ **1.34 yd³** bucket, rated capacity of lubricants, coolant, full fuel tank, operator, and standard equipment.

Triple-Grouser Shoes	Operating Weight	Ground Pressure
700 mm	23323 kg	0.43 kg/cm ²
28"	51,419 lb	6.2 psi
800 mm	23603 kg	0.38 kg/cm ²
31.5"	52,036 lb	5.5 psi

Component Weights

Arm including bucket cylinder and linkage

2900 mm **9'7"** HD arm assembly..... 1136 kg **2,505 lb**
 2900 mm **9'7"** HD arm assembly w/piping..... 1200 kg **2,646 lb**

One piece boom including arm cylinder


5700 mm **18'8"** boom assembly..... 1885 kg **4,156 lb**
 5700 mm **18'8"** HD boom assembly w/piping.. 1953 kg **4,306 lb**
 Boom cylinders x 2..... 205 kg **452 lb**
 Counterweight (standard)..... 4720 kg **10,406 lb**
 Counterweight (optional)..... 3600 kg **7,937 lb**
 1.02 m³ **1.34 yd³** bucket - 42" width..... 857 kg **1,890 lb**



DIMENSIONS

	Arm Length	2925 mm	9'7"
A	Overall length	9625 mm	31'7"
B	Length on ground (transport)	5000 mm	16'5"
C	Overall height (to top of boom)*	2996 mm	9'10"
D	Overall width	3180 mm	10'5"
E	Overall height (to top of cab)*	3045 mm	10'0"
F	Overall height (to top of handrail)*	3135 mm	10'4"
G	Ground clearance, counterweight	1085 mm	3'7"
H	Ground clearance, minimum	440 mm	1'5"
I	Tail swing radius	2940 mm	9'8"
J	Track length on ground	3655 mm	12'0"
K	Track length	4450 mm	14'7"
L	Track gauge	2380 mm	7'10"
M	Width of crawler	3180 mm	10'5"
N	Shoe width	800 mm	31.5"
O	Grouser height	26 mm	1.0"
P	Machine cab height	2605 mm	8'7"
Q	Machine cab width **	2850 mm	9'4"
R	Distance, swing center to rear end	2910 mm	9'7"

* : Including grouser height
 ** : Including handrail

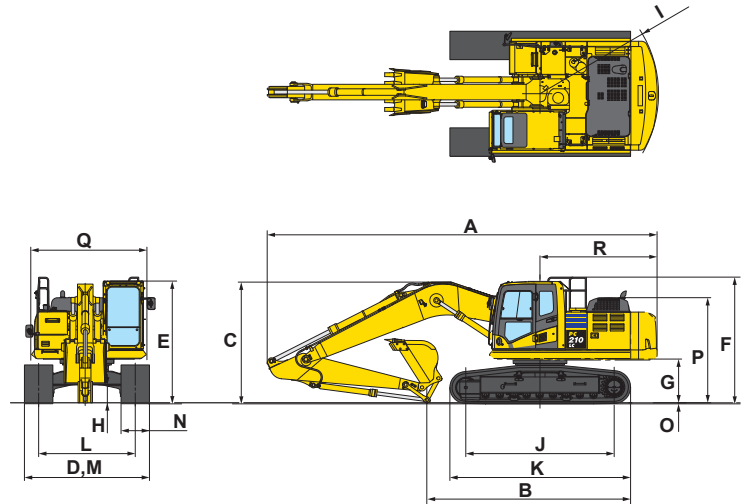

PC210LC-10




BACKHOE BUCKET, ARM AND BOOM COMBINATION

Bucket Type	Bucket						5.7 m (18'8") Boom	
	Capacity		Width		Weight		2.9 m (9'7")	
Komatsu TL	0.50 m ³	0.66 yd³	610 mm	24"	605 kg	1,334 lb	V	
	0.67 m ³	0.88 yd³	762 mm	30"	689 kg	1,518 lb	V	
	0.85 m ³	1.11 yd³	914 mm	36"	780 kg	1,719 lb	V	
	1.02 m ³	1.34 yd³	1067 mm	42"	857 kg	1,890 lb	W	
	1.20 m ³	1.57 yd³	1219 mm	48"	949 kg	2,092 lb	X	
Komatsu HP	0.50 m ³	0.66 yd³	610 mm	24"	652 kg	1,437 lb	V	
	0.67 m ³	0.88 yd³	762 mm	30"	763 kg	1,681 lb	V	
	0.85 m ³	1.11 yd³	914 mm	36"	868 kg	1,913 lb	V	
	1.02 m ³	1.34 yd³	1067 mm	42"	950 kg	2,095 lb	W	
	1.20 m ³	1.57 yd³	1219 mm	48"	1066 kg	2,349 lb	Y	
Komatsu HPS	0.50 m ³	0.66 yd³	610 mm	24"	724 kg	1,597 lb	V	
	0.67 m ³	0.88 yd³	762 mm	30"	840 kg	1,851 lb	V	
	0.85 m ³	1.11 yd³	914 mm	36"	962 kg	2,120 lb	V	
	1.02 m ³	1.34 yd³	1067 mm	42"	1061 kg	2,339 lb	X	
	1.20 m ³	1.57 yd³	1219 mm	48"	1193 kg	2,630 lb	Y	
Komatsu HPX	0.50 m ³	0.66 yd³	610 mm	24"	824 kg	1,817 lb	V	
	0.67 m ³	0.88 yd³	762 mm	30"	939 kg	2,071 lb	V	
	0.85 m ³	1.11 yd³	914 mm	36"	1061 kg	2,340 lb	W	
	1.02 m ³	1.34 yd³	1067 mm	42"	1161 kg	2,559 lb	X	
	1.20 m ³	1.57 yd³	1219 mm	48"	1293 kg	2,850 lb	Y	

V - Used with material weights up to 3,500 lb/yd³ W - Used with material weights up to 3,000 lb/yd³
 X - Used with material weights up to 2,500 lb/yd³ Y - Used with material weights up to 2,000 lb/yd³
 Z - Not useable



WORKING RANGE

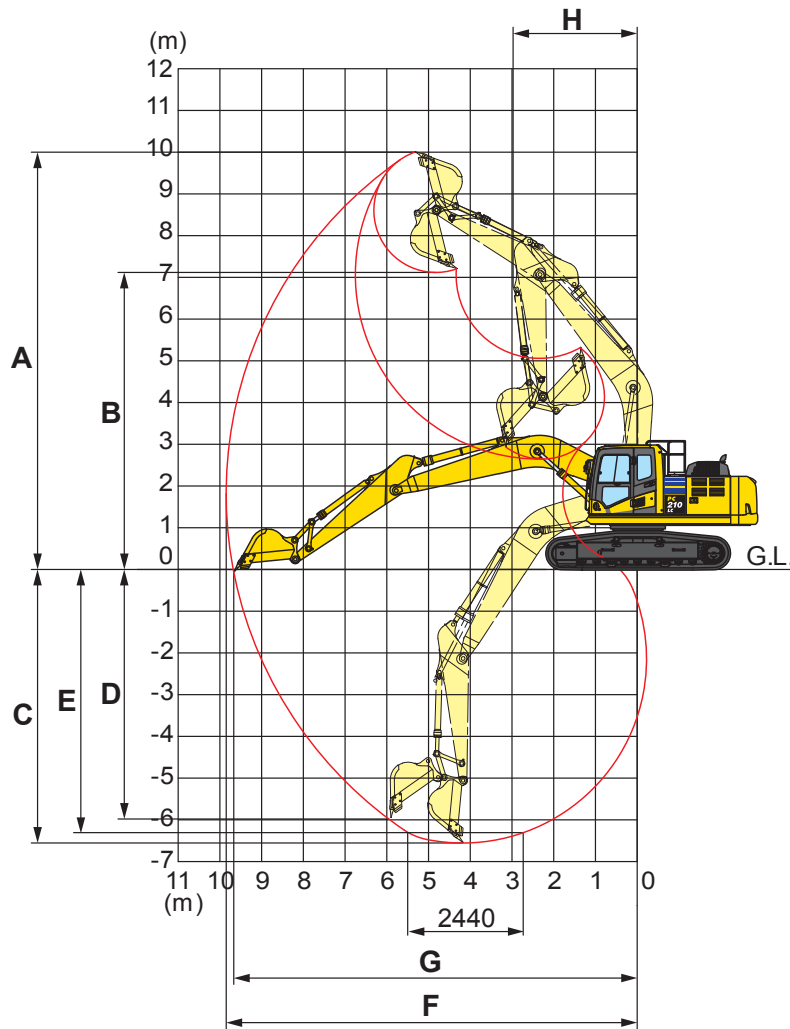


	Arm Length	2925 mm	9'7"
A	Max. digging height	10000 mm	32'10"
B	Max. dumping height	7110 mm	23'4"
C	Max. digging depth	6620 mm	21'9"
D	Max. vertical wall digging depth	5980 mm	19'7"
E	Max. digging depth for 8' level bottom	6370 mm	20'11"
F	Max. digging reach	9875 mm	32'5"
G	Max. digging reach at ground level	9700 mm	31'10"
H	Min. swing radius	3040 mm	10'0"
SAE rating	Bucket digging force at power max.	132 kN	
		13500 kg / 29,762 lb	
	Arm crowd force at power max.	103 kN	
		10500 kg / 23,149 lb	
ISO rating	Bucket digging force at power max.	149 kN	
		15200 kg / 33,510 lb	
	Arm crowd force at power max.	108 kN	
		11000 kg / 24,250 lb	

LIFT CAPACITIES



LIFTING CAPACITY WITH LIFTING MODE

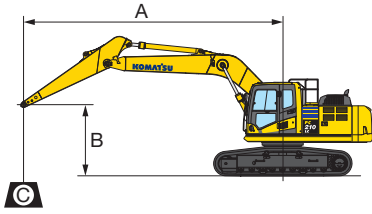


- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗ : Rating at maximum reach

- Conditions :
- 5700 mm 18' 8" one-piece boom
 - Counterweight: 4720 kg 10,406 lb
 - Bucket: None
 - Lifting mode: On

Arm: 2900 mm 9'7" HD Shoes: 700 mm 28" Unit: kg lb

B \ A	3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		⊗ MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'											* 4100	* 4100
6.1 m 20'					* 6500	6000					* 9050	* 9050
4.6 m 15'			* 8000	* 8000	* 7150	5900	* 5250	4200			* 3850	* 3850
3.0 m 10'	* 12800	* 12800	* 10350	8500	* 8250	5650	6100	4150			* 8500	* 8500
1.5 m 5'			* 12550	8050	8250	5450	5950	4050			* 3800	* 3800
0 m 0'	* 7450	* 7450	12650	7800	8100	5300	5900	3950			* 8400	* 8400
-1.5 m -5'	* 12000	* 12000	12550	7750	8000	5250	* 5850	3950			* 3950	3650
-3.0 m -10'	* 26500	* 26500	27750	17100	17700	11550	* 12900	8750			* 4750	3650
-4.6 m -15'	* 18500	14800	12650	7800	8050	5250					* 10450	8050
	* 15000	* 15000	* 10750	8050							* 5650	3950
	* 33100	* 33100	* 23750	17800							* 12500	8700
											* 7000	4650
											* 15450	10300
											* 8950	6600
											* 19750	14550

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

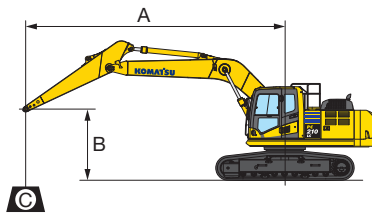

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗ : Rating at maximum reach

- Conditions :
- 5700 mm 18' 8" one-piece boom
 - Counterweight: 4720 kg 10,406 lb
 - Bucket: None
 - Lifting mode: On


Arm: 2900 mm 9'7" HD Shoes: 800 mm 31.5" Unit: kg lb

B \ A	3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		⊗ MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'											* 4100	* 4100
6.1 m 20'					* 6500	6100					* 9050	* 9050
4.6 m 15'			* 8000	* 8000	* 7150	5950	* 5250	4250			* 3850	* 3850
3.0 m 10'	* 12800	* 12800	* 10350	8600	* 8250	5700	6150	4200			* 8500	* 8500
1.5 m 5'			* 12550	8150	8350	5500	6050	4100			* 3800	* 3800
0 m 0'	* 7450	* 7450	12800	7900	8200	5350	5950	4000			* 3950	3700
-1.5 m -5'	* 12000	* 12000	12700	7800	8100	5300	* 5850	4000			* 8400	* 8400
-3.0 m -10'	* 26500	* 26500	28050	17250	17900	11700	* 12900	8800			* 4200	3600
-4.6 m -15'	* 18500	14950	12800	7850	8150	5350					* 9300	7950
	* 15000	* 15000	* 10750	8150							* 4750	3650
	* 33100	* 33100	* 23750	18000							* 10450	8150
											* 5650	4000
											* 12500	8800
											* 7100	4700
											* 15650	10400
											* 8950	6650
											* 19750	14700

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



LIFTING CAPACITY WITH LIFTING MODE

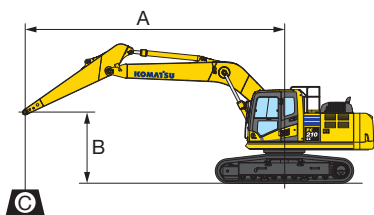

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗: Rating at maximum reach

- Conditions :
- 5700 mm **18' 8"** one-piece boom
 - Counterweight: 3600 kg **7,937 lb**
 - Bucket: None
 - Lifting mode: On


Arm: 2900 mm **9'7"** HD

Shoes: 700 mm **28"**

Unit: kg lb

B \ A	3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		⊗ MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'											* 4100	* 4100
											* 9050	* 9050
6.1 m 20'					* 6500	5350					* 3850	* 3850
					* 14400	11850					* 8500	* 8500
4.6 m 15'			* 8000	* 8000	* 7150	5200	* 5250	3700			* 3800	3500
			* 17700	* 17700	* 15850	11550	* 11550	8250			* 8400	7750
3.0 m 10'	* 12800	* 12800	* 10350	7550	7650	5000	5450	3650			* 3950	3200
	* 28300	* 28300	* 22850	16700	16900	11050	12050	8050			* 8700	7100
1.5 m 5'			11650	7100	7400	4800	5350	3550			* 4200	3100
			25650	15650	16350	10600	11800	7800			* 9300	6900
0 m 0'	* 7450	* 7450	11300	6850	7250	4650	5250	3450			* 4750	3150
	* 16500	* 16500	25000	15100	16000	10250	11650	7650			* 10450	7000
-1.5 m -5'	* 12000	* 12000	11250	6750	7150	4550	5250	3450			* 5250	3450
	* 26500	* 26500	24800	14950	15800	10100	11600	7600			* 11550	7600
-3.0 m -10'	* 18500	13000	11300	6800	7200	4600					6250	4050
	* 40850	28700	24950	15100	15900	10200					13850	9000
-4.6 m -15'	* 15000	* 15000	* 10750	7100							* 8950	5800
	* 33100	* 33100	* 23750	15700							* 19750	12800

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

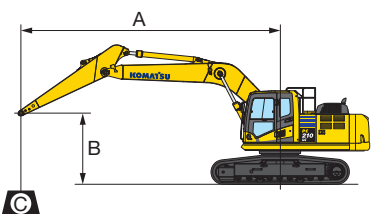

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗: Rating at maximum reach

- Conditions :
- 5700 mm **18' 8"** one-piece boom
 - Counterweight: 3600 kg **7,937 lb**
 - Bucket: None
 - Lifting mode: On

Arm: 2900 mm **9'7"** HD

Shoes: 800 mm **31.5"**

Unit: kg lb

B \ A	3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		⊗ MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'											* 4100	* 4100
											* 9050	* 9050
6.1 m 20'					* 6500	5400					* 3850	* 3850
					* 14400	11950					* 8500	* 8500
4.6 m 15'			* 8000	* 8000	* 7150	5300	* 5250	3750			* 3800	3550
			* 17700	* 17700	* 15850	11650	* 11550	8350			* 8400	7850
3.0 m 10'	* 12800	* 12800	* 10350	7650	7750	5050	5500	3700			* 3950	3250
	* 28300	* 28300	* 22850	16850	17100	11200	12200	8150			* 8700	7200
1.5 m 5'			11750	7200	7500	4850	5400	3600			* 4200	3150
			25950	15850	16550	10700	11950	7900			* 9300	6950
0 m 0'	* 7450	* 7450	11450	6900	7300	4700	5350	3500			* 4750	3200
	* 16500	* 16500	25300	15300	16200	10400	11750	7750			* 10450	7100
-1.5 m -5'	* 12000	* 12000	11350	6850	7250	4650	5300	3500			5300	3500
	* 26500	* 26500	25100	15100	16000	10250	11750	7700			11700	7700
-3.0 m -10'	* 18500	13150	11450	6900	7300	4650					6350	4100
	* 40850	29050	25250	15250	16100	10300					14000	9100
-4.6 m -15'	* 15000	13550	* 10750	7200							* 8950	5850
	* 33100	29850	* 23750	15850							* 19750	12950

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



STANDARD EQUIPMENT

- Alternator, 60 Ampere, 24V
- AM/FM radio
- Automatic engine warm-up system
- Automatic air conditioner/heater
- Auxiliary input (3.5mm jack)
- Batteries, large capacity
- Battery disconnect switch
- Boom and arm holding valves
- Converter, (2) x 12V
- Counterweight, 4720 kg **10,406 lb**
- Dry type air cleaner, double element
- Electric horn
- EMMS monitoring system
- Engine, Komatsu SAA6D107E-2
- Engine overheat prevention system
- Extended work equipment grease interval
- Fan guard structure
- Fuel system pre-cleaner 10 micron
- High back air suspension seat, with heat
- Hydraulic track adjusters
- KOMTRAX® Level 4.0
- Large LCD color monitor, high resolution
- Lock lever
- Mirrors, (LH and RH)
- Operator Protective Top Guard (OPG), Level 1
- Pattern change valve (ISO to BH control)
- Power maximizing system
- PPC hydraulic control system
- Pump/engine room partition cover
- Radiator and oil cooler dustproof net
- Rear reflectors
- Rearview monitoring system (1 camera)
- Revolving frame deck guard
- Revolving frame undercovers
- ROPS cab
- Seat belt, retractable, 76mm **3"**
- Seat belt indicator
- Secondary engine shutoff switch
- Service valve
- Shoes, triple grouser, 800mm **31.5"**
- Skylight
- Slip resistant foot plates
- Starter motor, 5.5kW/24V x 1
- Suction fan
- Thermal and fan guards
- Track frame undercover
- Travel alarm
- Working lights, 2 (boom and RH front)
- Working mode selection system



OPTIONAL EQUIPMENT

- (1) additional rearview camera
- Arms
 - 2925 mm **9'7"** arm assembly
 - 2925 mm **9'7"** HD arm assembly
 - 2925 mm **9'7"** HD arm assembly with piping
- Booms
 - 5700 mm **18'8"** boom assembly
 - 5700 mm **18'8"** HD boom assembly with piping
- Cab guards
 - Full front guard, OPG Level 1
 - Full front guard, OPG Level 2
 - Bolt-on top guard, OPG Level 2
 - Lower front window guard
- Counterweight, 3600 kg **7,937 lb**
- High pressure in-line hydraulic filters
- Hydraulic control unit, 1 actuator
- Rain visor
- Revolving frame undercovers, heavy duty
- Shoes, triple grouser, 700 mm **28"**
- Sun visor
- Straight travel pedal
- Track roller guards, full length
- Working light, front, one additional



ATTACHMENT OPTIONS

- Cab air pre-cleaner
- Grade control systems
- Hydraulic couplers
- Hydraulic kits, field installed
- Super long fronts
- PSM thumbs
- Rockland thumbs
- Vandalism protection guards with storage box

For a complete list of available attachments, please contact your local Komatsu distributor.